



ISO KERN Direct Vent

Maximus

Assembled Firebox and
Smoke Dome Dimensions
for 46 & 48



APPLICATIONS:

Indoor
Natural Gas
LP (Liquid Propane)
Custom Finish
Direct Vent Chimney
Combustible Floor Installation

Put the awe-inspiring power of
fire on full display with Isokern's
Maximus Series.


The Isokern MAXIMUS Series is the first ever masonry direct vent fireplace. Offering an expansive ceramic glass opening with Invisi-Barrier and Triple Stadium Burner for exceptional appearance and flame presentation. With an array of options, the MAXIMUS provides endless possibilities for making your space warm and inviting.

Specifications

Please Note: Additional clearance of 12” may be required from side wall where the air intake is located. The air intake is listed at zero (0”) clearance to combustible framing and can be routed through framing if required.

Framing & Weight

Model	Minimum Framing	Weight
46	56"W x 65"H x 26 3/4"D	1450 lbs
48	56"W x 71"H x 29 1/2"D	1600 lbs

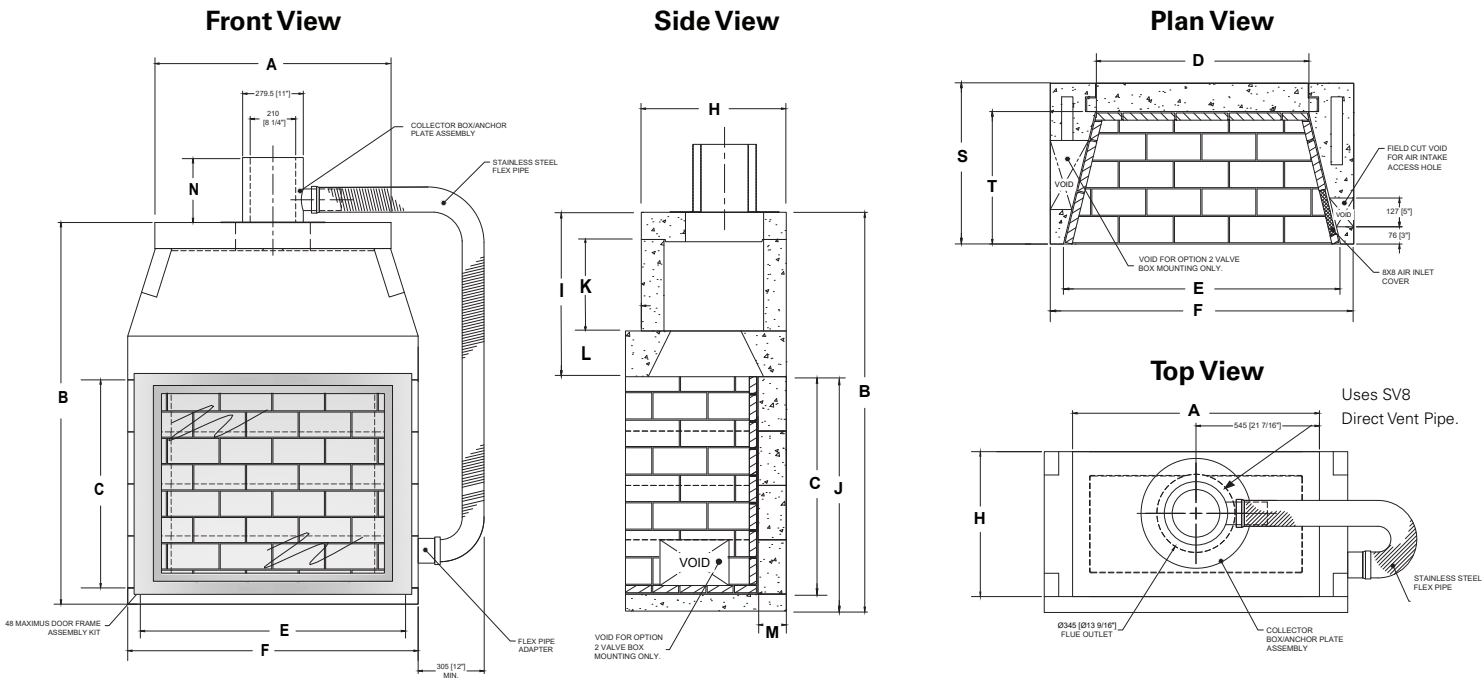

Front View	Model	A	B	C	D	E	F	G	N
	46	43"	63 1/4"	31 1/2"	37 1/4"	47 1/8"	53"	10 1/2"	11 3/4"
	48	43"	69 3/4"	38"	37 1/4"	48 1/2"	53"	9 1/2"	11 3/4"

Side View	Model	B	C	H	I	J	K	L	M
	46	63 1/4"	31 1/2"	25 1/4"	28 3/4"	34 1/2"	16"	8"	5"
	48	69 3/4"	38"	25 1/4"	28 3/4"	41"	16"	8"	5"

Plan View	Model	D	E	F	S	T
	46	37 1/4"	47 1/8"	53"	25 1/4"	20 1/4"
	48	37 1/4"	48 1/2"	53"	28"	23"