

Cali-Line

BY  OUTDOOR-FIT

The Cali-Line was created to bring together smart design, lasting durability, and total flexibility in outdoor fitness. Built for proper exercise biomechanics and engineered to meet ASTM safety standards, each unit is modular, customizable, and designed to suit any space, user group, or training need.

The Cali-Line is divided into three product categories – **Singles, Rigs, and Customs** – each with its unique advantages to meet a variety of spaces and projects so that you get the system best fit for your needs.

CALI-LINE SINGLES

Preconfigured single-user stations with a compact footprint and exercise variety.

CALI-LINE RIGS

A versatile series of preconfigured and inter-connected single stations available in both compact and expansive layouts, from multi-user 1-post setups to large-scale 12-post systems.

CALI-LINE CUSTOMS

Design your own Cali-Rig by selecting from our range of single stations and customize the configuration, footprint, and user capacity to meet your project's specific needs.



**WILDLY
OVERBUILT**



**ERGONOMIC
DESIGN**



**ADA
OPTIONS**



**ASTM
CERTIFIED**



**FULLY
CUSTOMIZABLE**



**EXPANDABLE
CONFIGURATIONS**



**INTERCHANGEABLE
COMPONENTS**



**INSTRUCTIONAL
PLACARDS**



**15 YEAR
WARRANTY**

COMPATIBILITY OF PRODUCTS


The Cali-Line is a modular, customizable exercise line based around two key concepts: standardization and interchangeability. All Cali-Line products mount to the same 4x4" posts, share the same 4' on center post spacing and feature a compatible mounting pattern with identical hardware, which allows for simple assembly and installation.

CLEAR, INCLUSIVE INSTRUCTIONS

Because everyone deserves to feel confident using outdoor fitness equipment, every Cali-Line station - whether a Single or a Rig, compact or expansive - comes with instructional placards to empower users of all ages and experience levels to use the equipment safely, properly, and effectively.

On each instructional placard, users will find:

- ✓ **Step-by-step instruction** to demonstrate proper technique
- ✓ **Best practices** to ensure safe and effective workouts
- ✓ **Colorful illustrations** to support visual learners
- ✓ **Scannable QR codes** linking to video demonstrations and expanded content

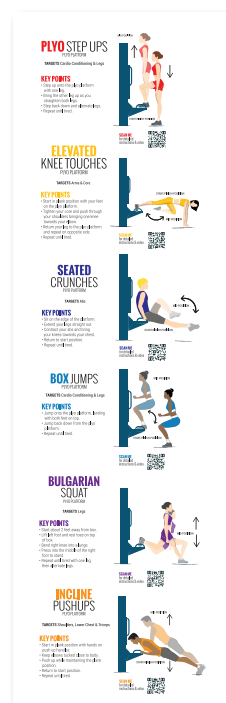

LOOK FOR THESE SYMBOLS




ADA-Compliant Height: Indicates equipment is designed to meet ADA guidelines for height accessibility.



Ergo Upgrade: The standard straight pull-up or push-up bar can be replaced with a multi-grip bar upon the client's request.



Requires Safety Surfacing: With a fall height greater than 39.4", the equipment must be installed over impact-attenuating surfacing in compliance with ASTM F3101 standard for outdoor fitness equipment.



Cali-12" Plyo Box

#OF-200-01-01



ASTM Use Zone: 13 ft² (1.2 m²)


of Users: 1

ASTM Fall Height: 12 in (31 cm)

of Stations: 1

Min. Pad Size: 14 ft x 8 ft (4.3 m x 2.4 m)

A single solid steel plyo box that stands 12" high.
Features a slip-resistant diamond tread plate.



Cali-18" Plyo Box

#OF-200-01-02



ASTM Use Zone: 13 ft² (1.2 m²)


of Users: 1

ASTM Fall Height: 18 in (46 cm)

of Stations: 1

Min. Pad Size: 14 ft x 8 ft (4.3 m x 2.4 m)

A single solid steel plyo box that stands 18" high.
Features a slip-resistant diamond tread plate.

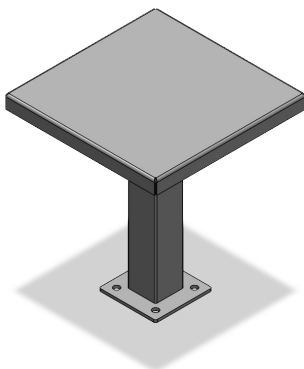

Cali-24" Plyo Box

#OF-200-01-03



ASTM Use Zone: 13 ft² (1.2 m²)

of Users: 1

ASTM Fall Height: 24 in (61 cm)

of Stations: 1

Min. Pad Size: 14 ft x 8 ft (4.3 m x 2.4 m)

A single solid steel plyo box that stands 24" high.
Features a slip-resistant diamond tread plate.

Cali-Post-Mounted Plyo Box

#OF-200-01-04



ASTM Use Zone: 17 ft² (1.5 m²)


of Users: 1

ASTM Fall Height: 24 in (61 cm)

of Stations: 1

Min. Pad Size: 9 ft x 15 ft (2.6 m x 4.4 m)

A customizable-height plyo box and stability support handle anchored to an upright post. Diamond tread plate and side handles provide slip resistance and support.

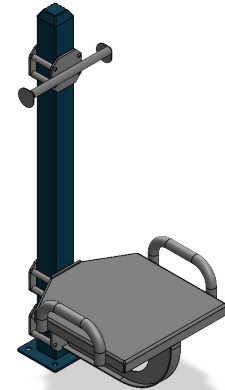

Cali-Parallel Bars

#OF-200-02-01



ASTM Use Zone: 16 ft² (1.5 m²)


of Users: 1

ASTM Fall Height: 42 in (107 cm)

of Stations: 1

Min. Pad Size: 11 ft x 11 ft (3.2 m x 3.2 m)

Parallel bars 42" high support bodyweight training, balance exercises, and both rehabilitative and intensive workouts.

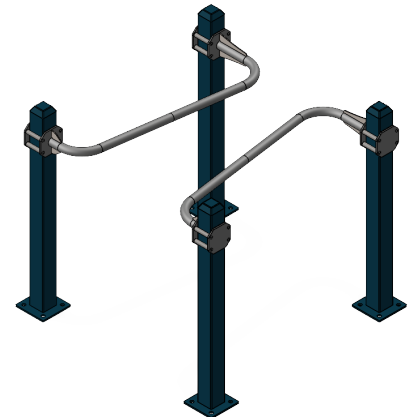

Cali-ADA Parallel Bars

#OF-200-02-02



ASTM Use Zone: 16 ft² (1.5 m²)


of Users: 1


ASTM Fall Height: 34 in (86 cm)

of Stations: 1

Min. Pad Size: 11 ft x 11 ft (3.2 m x 3.2 m)

Parallel bars 34" high support wheelchair users and others seeking inclusive fitness options. They support bodyweight training, balance exercises, and rehabilitative and intensive workouts.

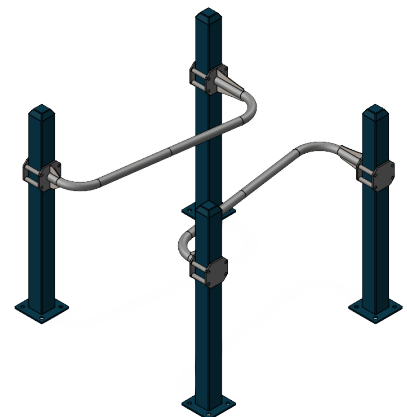

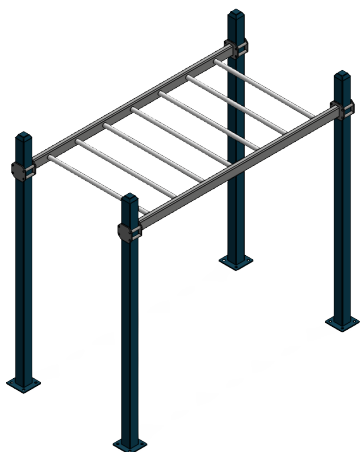

Cali-Overhead Ladder

#OF-200-03



ASTM Use Zone: 32 ft² (3.0 m²)


of Users: 2

ASTM Fall Height: 84 in (213 cm)

of Stations: 2

Min. Pad Size: 15 ft x 11 ft (4.4 m x 3.2 m)

A multi-functional exercise system ideal for classic upper body workouts, traversing, and hanging exercises.

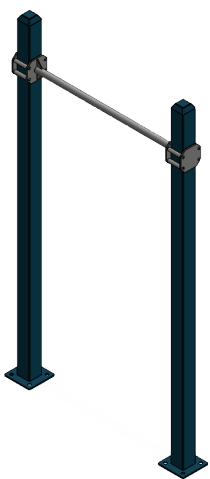

Cali-7' Pull-Up Bar

#OF-200-04-01



ASTM Use Zone: 22 ft² (2.1 m²)


of Users: 1

ASTM Fall Height: 84 in (213 cm)

of Stations: 1

Min. Pad Size: 12 ft x 11 ft (3.7 m x 3.2 m)

A 84" high straight pull-up bar, ideal for classic upper-body workouts.

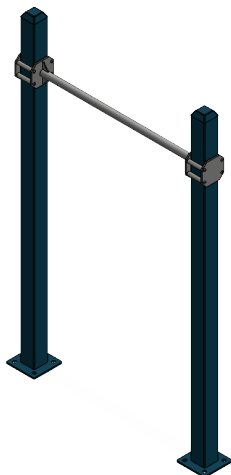

Cali-5' Pull-Up Bar

#OF-200-04-02



ASTM Use Zone: 22 ft² (2.1 m²)

of Users: 1

ASTM Fall Height: 60 in (152 cm)

of Stations: 1

Min. Pad Size: 12 ft x 11 ft (3.7 m x 3.2 m)

A 60" high straight pull-up bar, ideal for varied upper-body and mobility training.

Cali-3' Pull-Up Bar

#OF-200-04-03



ASTM Use Zone: 23 ft² (2.2 m²)


ASTM Fall Height: 37 in (94 cm)

Min. Pad Size: 12 ft x 11 ft (3.7 m x 3.2 m)

of Users: 1

of Stations: 1

A 36" high straight pull-up bar, ideal for supportive bodyweight training.

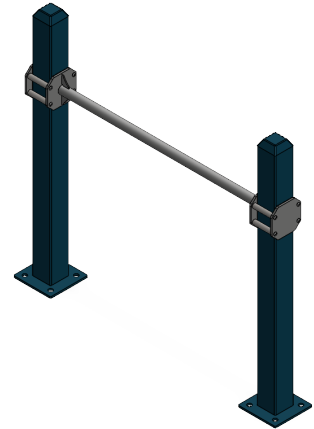

Cali-ADA Pull-Up Bar

#OF-200-04-04



ASTM Use Zone: 22 ft² (2.1 m²)


ASTM Fall Height: 66 in (168 cm)

Min. Pad Size: 12 ft x 11 ft (3.7 m x 3.2 m)

of Users: 1

of Stations: 1

A 66" high straight pull-up bar, designed for accessible and inclusive outdoor fitness spaces.

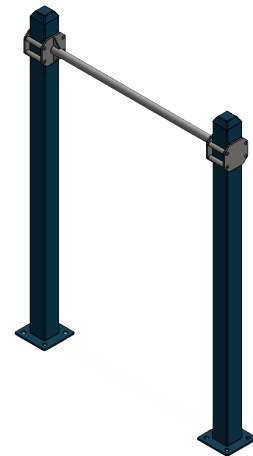

Cali-Multi-Grip Pull-Up Bar

#OF-200-06-01



ASTM Use Zone: 22 ft² (2.1 m²)


ASTM Fall Height: 84 in (213 cm)


Min. Pad Size: 12 ft x 11 ft (3.7 m x 3.2 m)

of Users: 1

of Stations: 1

A 84" high multi-grip bar supports wide, narrow, hammer, supinated, overhand, and mixed grip pull-ups. Designed for progression and a range of difficulty.

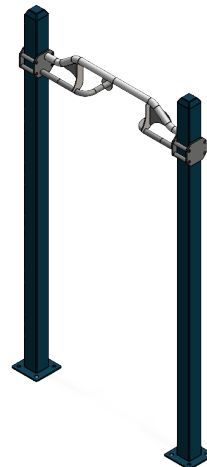

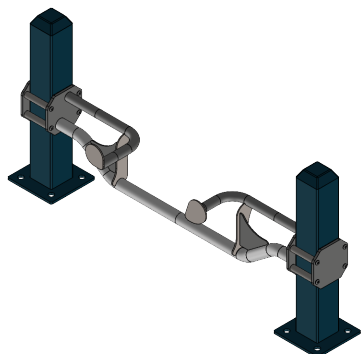

Cali-Multi-Grip Push-Up Bench

#OF-200-06-02

ASTM Use Zone: 23 ft² (2.2 m²)


of Users: 1

ASTM Fall Height: N/A

of Stations: 1

Min. Pad Size: 13 ft x 11 ft (3.8 m x 3.2 m)

A multi-grip 12" high push-up bench with multiple grip positions—wide, narrow, neutral, and supinated—to accommodate various difficulty levels.

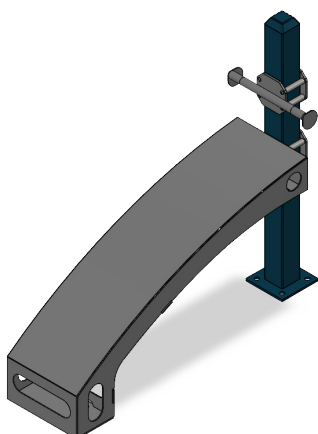

Cali-Sit-Up Bench

#OF-200-07

ASTM Use Zone: 9 ft² (0.9 m²)


of Users: 1

ASTM Fall Height: N/A

of Stations: 1

Min. Pad Size: 8 ft x 14 ft (2.3 m x 4.3 m)

Designed for core-focused training, this bench supports incline and decline sit-ups, leg lifts, and a variety of abdominal exercises.

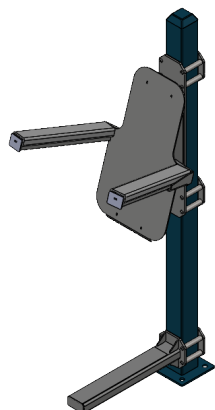

Cali-Vertical Knee Raise & Calf Raise

#OF-200-08



ASTM Use Zone: 15 ft² (1.4 m²)

of Users: 1

ASTM Fall Height: 63 in (160 cm)

of Stations: 1

Min. Pad Size: 9 ft x 12 ft (2.7 m x 3.5 m)

An angled backrest to support proper biomechanics during vertical knee raises. Also includes a built-in calf raise station.

Cali-Lower Back Extension Bench

#OF-200-10

ASTM Use Zone: 14 ft² (1.3 m²)


of Users: 1

ASTM Fall Height: N/A

of Stations: 1

Min. Pad Size: 9 ft x 13 ft (2.6 m x 4.0 m)

An ergonomic lower back extension bench with four foot placement positions to accommodate users of various heights, ensuring proper and safe hip pivoting.

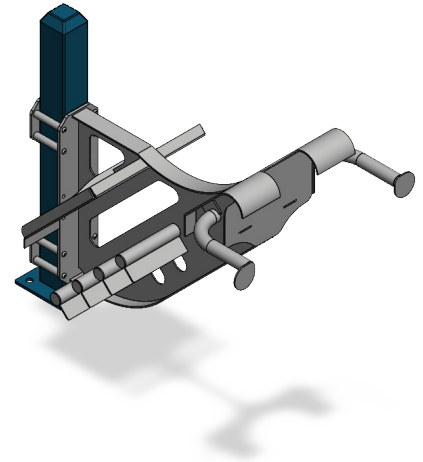

Cali-Thigh Squat Station

#OF-200-11

ASTM Use Zone: 6 ft² (0.6 m²)


of Users: 1

ASTM Fall Height: N/A

of Stations: 1

Min. Pad Size: 11 ft x 8 ft (3.2 m x 2.3 m)

A thigh squat supports deep bodyweight squats with a forward support handle, promoting proper form and control during the exercise.

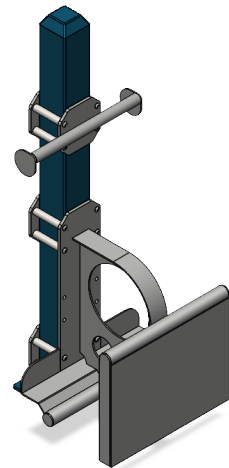

Cali-Stretch & Suspension Station

#OF-200-12-01

ASTM Use Zone: 72 ft² (6.7 m²)

of Users: 2

ASTM Fall Height: N/A

of Stations: 2

Min. Pad Size: 12 ft x 19 ft (3.7 m x 5.8 m)

A two-user vertical stretching station with multiple attachment points for resistance bands, carabiners, and more.





Cali-Band Stretching Post

#OF-200-12-02

ASTM Use Zone: 60. ft² (5.6 m²)


ASTM Fall Height: N/A

Min. Pad Size: 10 ft x 18 ft (3.1 m x 5.5 m)

of Users: 1

of Stations: 1

A vertical stretching system offers multiple grip points for targeted flexibility training across different muscle groups.

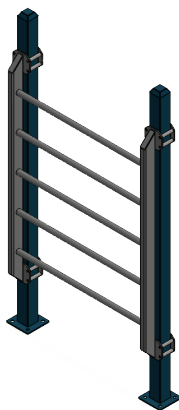

Cali-Swedish Ladder

#OF-200-14

ASTM Use Zone: 23 ft² (2.1 m²)

ASTM Fall Height: 72 in (182 cm)

Min. Pad Size: 12 ft x 11 ft (3.7 m x 3.2 m)

of Users: 1

of Stations: 1

A multi-functional exercise system ideal for stretching, mobility, and hanging exercises.

Cali-Rig 01

#OF-900-01

ASTM Use Zone: 36 ft² (3.3 m²)

ASTM Fall Height: 53 in (134 cm)

Min. Pad Size: 18 ft x 9 ft (5.5 m x 2.7 m)




of Users: 2

of Stations: 2

STATIONS:

- Vertical knee raise
- Calf raise
- Plyo box



Cali-Rig 02

#OF-900-02

ASTM Use Zone: 29 ft² (2.7 m²)

ASTM Fall Height: 53 in (134 cm)

Min. Pad Size: 18 ft x 9 ft (5.5 m x 2.7 m)




of Users: 2

of Stations: 2

STATIONS:

- Vertical knee raise
- Lower back extension bench
- Calf raise

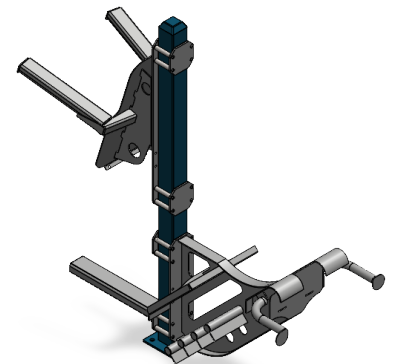

Cali-Rig 03

#OF-900-03

ASTM Use Zone: 21 ft² (2.0 m²)

ASTM Fall Height: 53 in (134 cm)

Min. Pad Size: 16 ft x 9 ft (4.7 m x 2.7 m)




of Users: 2

of Stations: 2

STATIONS:

- Vertical knee raise
- Calf raise
- Thigh squat

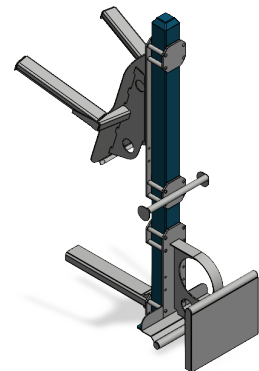

Cali-Rig 04

#OF-900-04

ASTM Use Zone: 21 ft² (1.9 m²)

ASTM Fall Height: 49 in (126 cm)


Min. Pad Size: 17 ft x 9 ft (5.2 m x 2.7 m)


of Users: 2

of Stations: 2

STATIONS:

- Lower back extension bench
- Thigh squat

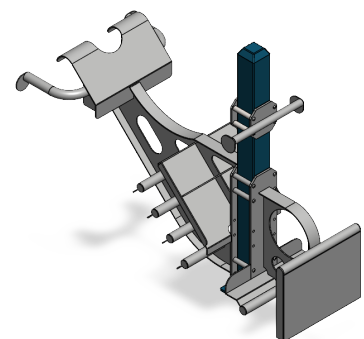

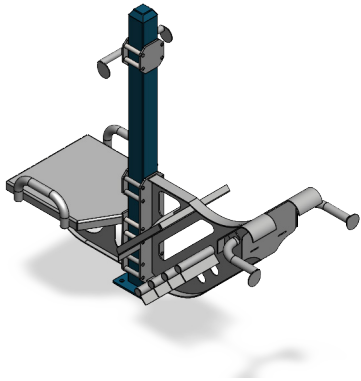

Cali-Rig 05

#OF-900-05

ASTM Use Zone: 30 ft² (2.8 m²)

ASTM Fall Height: 62 in (157 cm)

Min. Pad Size: 21 ft x 9 ft (6.4 m x 2.6 m)




of Users: 2

of Stations: 2

STATIONS:

■ Lower back extension bench

■ Plyo box

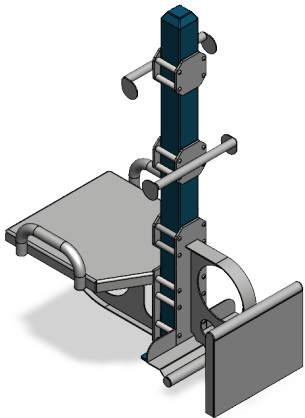

Cali-Rig 06

#OF-900-06

ASTM Use Zone: 24 ft² (2.2 m²)

ASTM Fall Height: 62 in (157 cm)

Min. Pad Size: 20 ft x 9 ft (5.9 m x 2.6 m)




of Users: 2

of Stations: 2

STATIONS:

■ Thigh squat

■ Plyo box



Cali-Rig 07

#OF-900-07

ASTM Use Zone: 276 ft² (25.6 m²)

ASTM Fall Height: N/A

Min. Pad Size: 63 ft x 20 ft (19.2 m x 5.9 m)

of Users: 4

of Stations: 5

STATIONS:

■ Cali-med ball target (compact)

■ Cali-battle rope mount (2)

■ Cali-TRX mount

■ Cali-med ball target (tall)



Cali-Rig 08

#OF-900-08

ASTM Use Zone: 83 ft² (7.7 m²)

ASTM Fall Height: N/A

Min. Pad Size: 19 ft x 19 ft (5.6 m x 5.6 m)

of Users: 4

of Stations: 4

STATIONS:

■ Cali-TRX mount (2)

■ Cali-TRX mount (ADA height) (2)

Cali-Rig 09

#OF-900-09

ASTM Use Zone: 130 ft² (12.1 m²)

ASTM Fall Height: N/A

Min. Pad Size: 19 ft x 19 ft (5.8 m x 5.8 m)

of Users: 4

of Stations: 4

STATIONS:

- Band stretching post (4)



Cali-Rig 10

#OF-900-10

ASTM Use Zone: 21 ft² (1.9 m²)

ASTM Fall Height: 84 in (213 cm)


Min. Pad Size: 15 ft x 9 ft (4.6 m x 2.7 m)

of Users: 2

of Stations: 2

STATIONS:

- 84" multi-grip pull-up bar
- Thigh squat

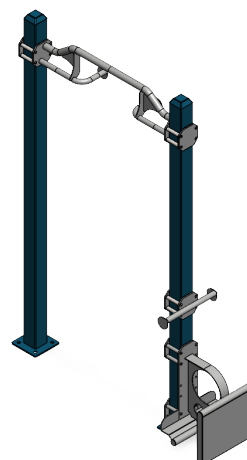

Cali-Rig 11

#OF-900-11

ASTM Use Zone: 285 ft² (26.5 m²)

ASTM Fall Height: 84 in (213 cm)


Min. Pad Size: 64 ft x 23 ft (19.4 m x 7.0 m)


of Users: 5

of Stations: 3

STATIONS:

- 84" straight pull-up bar
- Battle rope mount (2)
- Cali-TRX mount (2)

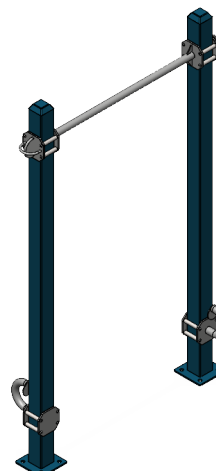

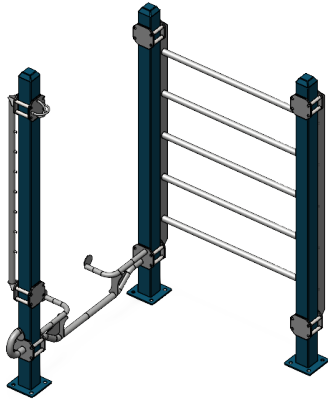

Cali-Rig 12

#OF-900-12

ASTM Use Zone: 218 ft² (20.2 m²)

ASTM Fall Height: N/A


Min. Pad Size: 44 ft x 19 ft (13.4 m x 5.8 m)

of Users: 5

of Stations: 5

STATIONS:

- Swedish ladder
- Battle rope mount
- Multi-grip push-up bar
- Cali-TRX mount
- Band stretching post

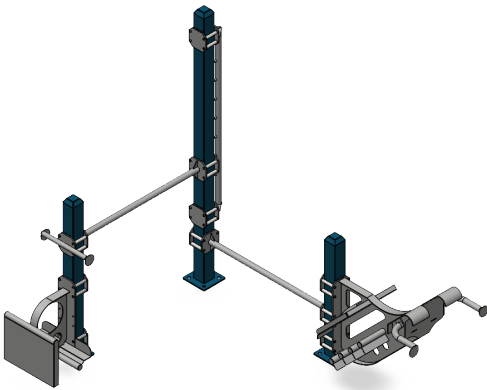

Cali-Rig 13

#OF-900-13

ASTM Use Zone: 108 ft² (10.0 m²)

ASTM Fall Height: N/A


Min. Pad Size: 21 ft x 23 ft (6.4 m x 6.9 m)

of Users: 5

of Stations: 5

STATIONS:

- Lower back extension bench
- 36" straight pull-up bar
- Straight push-up bar
- Thigh squat
- Band stretching post

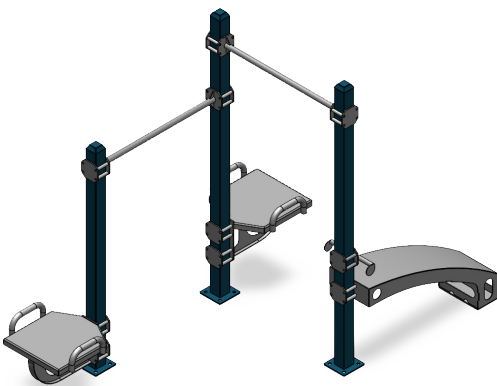

Cali-Rig 14

#OF-900-14

ASTM Use Zone: 91 ft² (8.4 m²)

ASTM Fall Height: 84 in (213 cm)

Min. Pad Size: 26 ft x 14 ft (7.9 m x 4.3 m)

of Users: 5

of Stations: 5



STATIONS:

- 84" straight pull-up bar
- Plyo box (2)
- ADA height (66") straight pull-up bar
- Sit up bench

Cali-Rig 15

#OF-900-15



ASTM Use Zone: 45 ft² (4.2 m²)

ASTM Fall Height: 84 in (213 cm)


Min. Pad Size: 19 ft x 14 ft (5.6 m x 4.3 m)

of Users: 3

of Stations: 3

STATIONS:

- 84" straight pull-up bar
- Straight push-up bar
- 36" straight pull-up bar

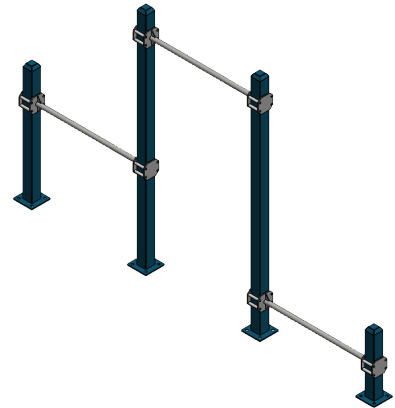

Cali-Rig 16

#OF-900-16



ASTM Use Zone: 45 ft² (4.2 m²)

ASTM Fall Height: 84 in (213 cm)


Min. Pad Size: 19 ft x 14 ft (5.6 m x 4.3 m)

of Users: 3

of Stations: 3

STATIONS:

- Multi-grip push-up bar
- 36" straight pull-up bar
- 84" multi-grip pull-up bar

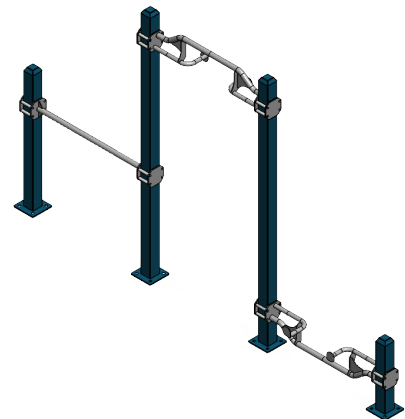

Cali-Rig 17

#OF-900-17



ASTM Use Zone: 45 ft² (4.2 m²)

ASTM Fall Height: 84 in (213 cm)


Min. Pad Size: 17 ft x 11 ft (5.0 m x 3.2 m)


of Users: 3

of Stations: 3

STATIONS:

- Parallel bars (42")
- 84" straight pull-up bars (2)

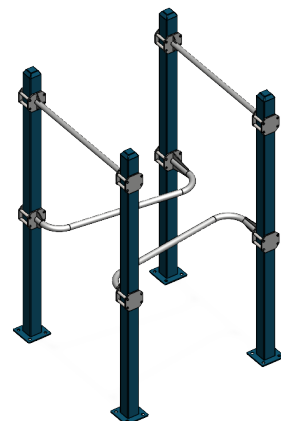

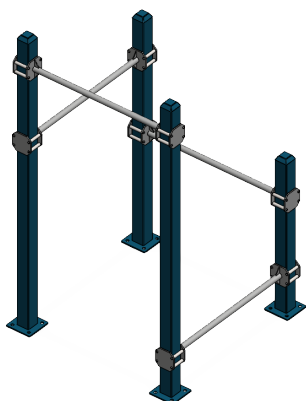

Cali-Rig 18

#OF-900-18



ASTM Use Zone: 60 ft² (5.6 m²)

ASTM Fall Height: 84 in (213 cm)


Min. Pad Size: 16 ft x 16 ft (4.9 m x 4.9 m)

of Users: 4

of Stations: 4

STATIONS:

- 84" straight pull-up bar
- ADA height (66") straight pull-up bar
- Straight push-up bar
- 36" pull-up bar

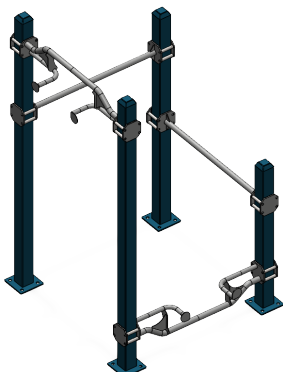

Cali-Rig 19

#OF-900-19



ASTM Use Zone: 60 ft² (5.6 m²)

ASTM Fall Height: 84 in (213 cm)


Min. Pad Size: 16 ft x 16 ft (4.9 m x 4.9 m)

of Users: 4

of Stations: 4

STATIONS:

- 84" multi-grip pull-up bar
- ADA height (66") straight pull-up bar
- Multi-grip push-up bar
- 36" straight pull-up bar

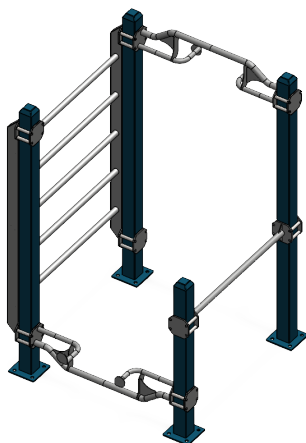

Cali-Rig 20

#OF-900-20



ASTM Use Zone: 80 ft² (7.5 m²)

ASTM Fall Height: 76 in (193 cm)

Min. Pad Size: 20 ft x 16 ft (6.1 m x 4.7 m)

of Users: 4

of Stations: 4

STATIONS:

- Swedish ladder
- 84" multi-grip pull-up bar
- 36" straight pull-up bar
- Multi-grip push-up bar

Cali-Rig 21

#OF-900-21



ASTM Use Zone: 78 ft² (7.3 m²)

ASTM Fall Height: 84 in (213 cm)


Min. Pad Size: 21 ft x 16 ft (6.4 m x 4.9 m)

of Users: 4

of Stations: 4

STATIONS:

- Swedish ladder (2)
- 84" straight pull-up bar (2)

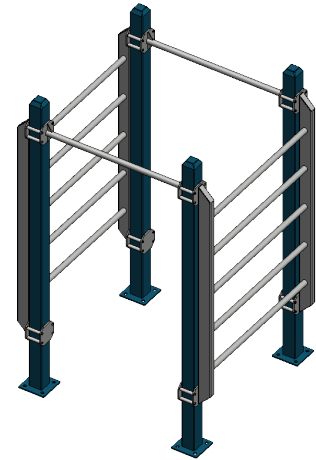

Cali-Rig 22

#OF-900-22



ASTM Use Zone: 137 ft² (12.7 m²)

ASTM Fall Height: 84 in (213 cm)


Min. Pad Size: 27 ft x 14 ft (8.2 m x 4.3 m)

of Users: 5

of Stations: 6

STATIONS:

- Cali-Overhead ladder
- Cali-TRX mounts (4)

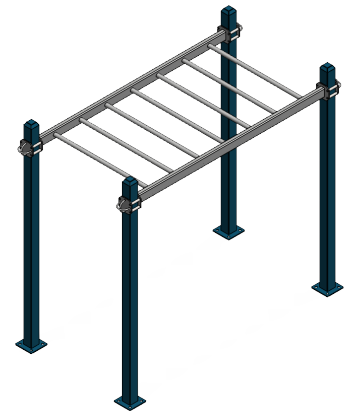

Cali-Rig 23

#OF-900-23



ASTM Use Zone: 84 ft² (7.8 m²)

ASTM Fall Height: 84 in (213 cm)


Min. Pad Size: 17 ft x 24 ft (5.0 m x 7.2 m)


of Users: 5

of Stations: 6

STATIONS:

- Cali-Overhead ladder
- Plyo box
- Vertical knee raise + calf raise step
- Lower back extension bench
- Thigh squat

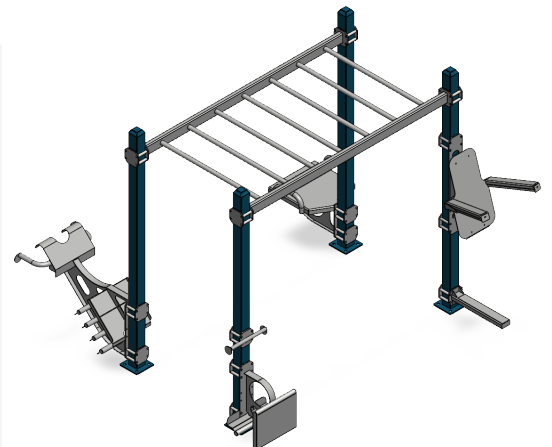

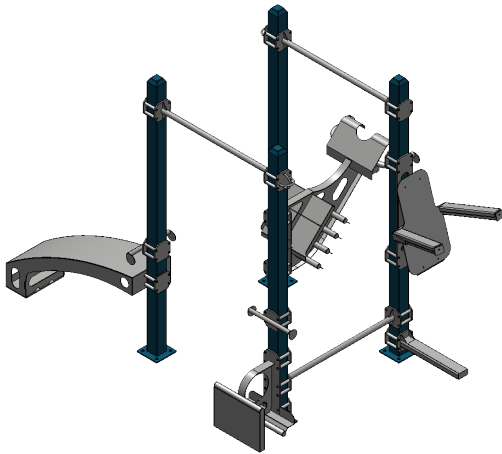

Cali-Rig 24

#OF-900-24



ASTM Use Zone: 138 ft² (12.8 m²)

ASTM Fall Height: 84 in (213 cm)


Min. Pad Size: 21 ft x 24 ft (6.4 m x 7.3 m)

of Users: 7

of Stations: 7

STATIONS:

- Sit-up bench
- Vertical knee raise + calf raise step
- Thigh squat
- Lower back extension bench
- 84" straight pull-up bar (2)
- Straight push-up bar
- Cali-TRX mounts (2)

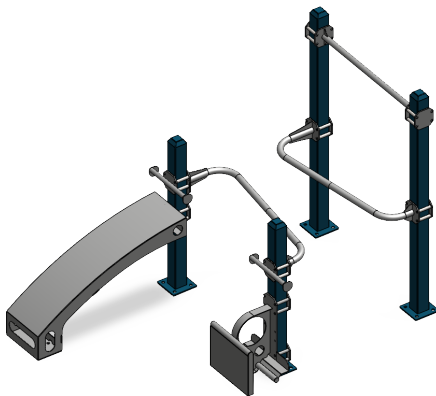

Cali-Rig 25

#OF-900-25



ASTM Use Zone: 46 ft² (4.23 m²)

ASTM Fall Height: 46 in (116 cm)


Min. Pad Size: 12 ft x 20 ft (3.5 m x 6.1 m)

of Users: 4

of Stations: 4

STATIONS:

- Sit-up bench
- ADA height (36") parallel bars
- Thigh squat
- ADA height (66") pull-up bar

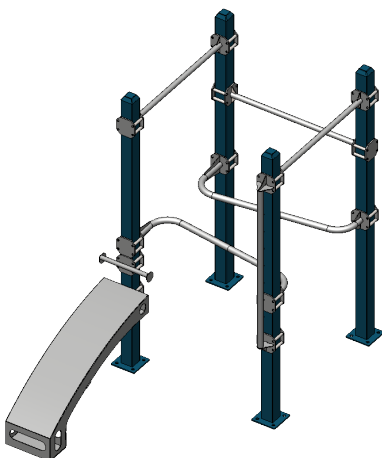

Cali-Rig 26

#OF-900-26



ASTM Use Zone: 109 ft² (10.1 m²)

ASTM Fall Height: 84 in (213 cm)

Min. Pad Size: 20 ft x 19 ft (6.2 m x 5.8 m)

of Users: 6

of Stations: 6

STATIONS:

- 84" straight pull-up bar (2)
- Sit-up bench
- Band stretching post
- Parallel bars (42")
- ADA height (66") straight pull-up bar

Cali-Rig 27

#OF-900-27



ASTM Use Zone: 52 ft² (4.8 m²)

of Users: 4


ASTM Fall Height: 84 in (213 cm)

of Stations: 4

Min. Pad Size: 14 ft x 23 ft (4.1 m x 7.0 m)

STATIONS:

- 84" multi-grip pull-up bar
- Vertical knee raise + calf raise step
- Parallel bars (42")
- Sit-up bench

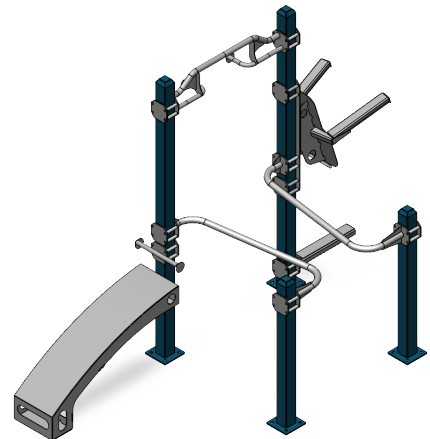

Cali-Rig 28

#OF-900-28



ASTM Use Zone: 61 ft² (5.7 m²)

of Users: 5


ASTM Fall Height: 84 in (213 cm)

of Stations: 5

Min. Pad Size: 20 ft x 15 ft (5.9 m x 4.4 m)

STATIONS:

- 84" straight pull-up bar
- Multi-grip push-up bar
- ADA height (66") straight pull-up bar
- Straight push-up bar
- Plyo box

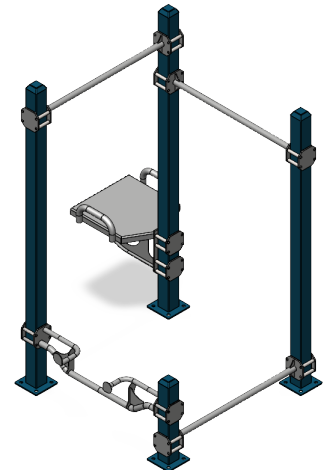

Cali-Rig 29

#OF-900-29



ASTM Use Zone: 92 ft² (8.6 m²)

of Users: 4


ASTM Fall Height: 84 in (213 cm)


of Stations: 4

Min. Pad Size: 20 ft x 18 ft (5.9 m x 5.3 m)

STATIONS:

- Band stretching post
- Parallel bars (42")
- Lower back extension bench
- 84" straight pull-up bar

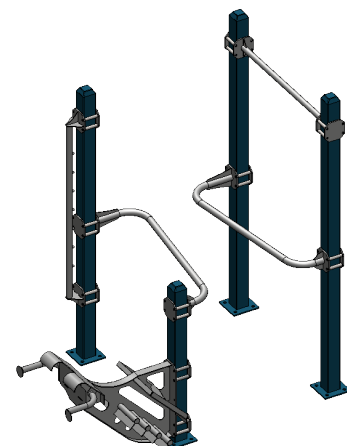

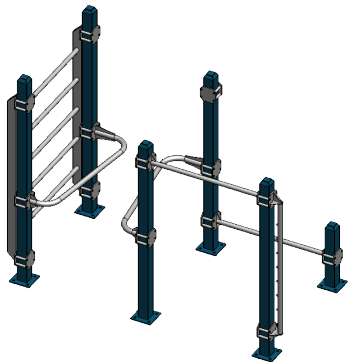

Cali-Rig 30

#OF-900-30



ASTM Use Zone: 158 ft² (14.7 m²)

ASTM Fall Height: 66 in (168 cm)

Min. Pad Size: 22 ft x 26 ft (6.7 m x 7.8 m)

of Users: 5

of Stations: 6

STATIONS:

- ADA height (34") parallel bars
- ADA height (66") straight pull-up bar
- ADA height TRX mount
- Swedish ladder
- Straight push-up bar
- Band stretching post



Cali-Rig 31

#OF-900-31



ASTM Use Zone: 86 ft² (8.0 m²)

ASTM Fall Height: 84 in (213 cm)


Min. Pad Size: 22 ft x 16 ft (6.6 m x 4.9 m)

of Users: 5

of Stations: 5

STATIONS:

- Cali-Overhead ladder
- ADA height (66") straight pull-up bar
- 60" straight pull-up bar
- 36" straight pull-up bar

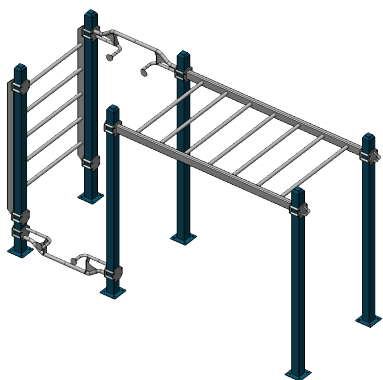

Cali-Rig 32

#OF-900-32



ASTM Use Zone: 139 ft² (12.9 m²)

ASTM Fall Height: 84 in (213 cm)

Min. Pad Size: 30 ft x 15 ft (9.0 m x 4.6 m)

of Users: 7

of Stations: 6

STATIONS:

- Cali-Overhead ladder
- 84" multi-grip pull-up bar
- Cali-TRX mounts (2)
- Multi-grip push-up bar
- Swedish ladder

Cali-Rig 33

#OF-900-33



ASTM Use Zone: 78 ft² (7.2 m²)

ASTM Fall Height: 84 in (213 cm)


Min. Pad Size: 16 ft x 20 ft (4.9 m x 6.1 m)

of Users: 5

of Stations: 5

STATIONS:

- 84" multi-grip pull-up bar
- 36" straight pull-up bar
- 84" straight pull-up bar
- ADA height (66") straight pull-up bar
- Parallel bars (42")

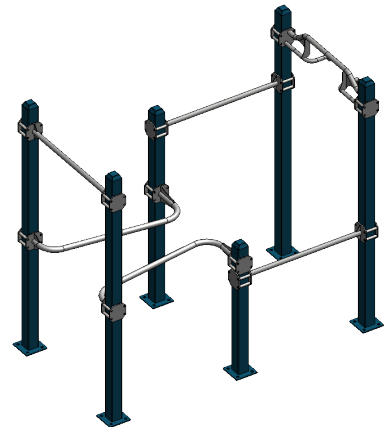

Cali-Rig 34

#OF-900-34



ASTM Use Zone: 163 ft² (15.2 m²)

ASTM Fall Height: 84 in (213 cm)


Min. Pad Size: 26 ft x 28 ft (7.8 m x 8.4 m)

of Users: 6

of Stations: 5

STATIONS:

- Multi-grip push-up bar
- Sit-up bench
- Cali-Overhead ladder
- Swedish ladder
- Band stretching post

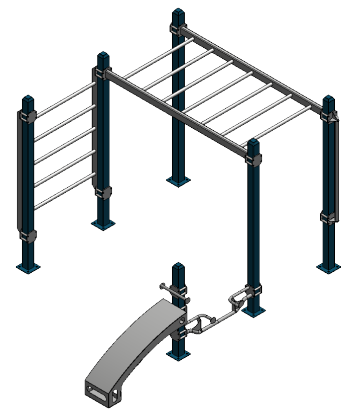

Cali-Rig 35

#OF-900-35



ASTM Use Zone: 177 ft² (16.4 m²)

ASTM Fall Height: 84 in (213 cm)


Min. Pad Size: 26 ft x 28 ft (7.8 m x 8.5 m)


of Users: 8

of Stations: 7

STATIONS:

- Multi-grip push-up bar
- Sit-up bench
- Cali-Overhead ladder
- Swedish ladder
- Band stretching post
- Lower back extension bench
- Thigh squat

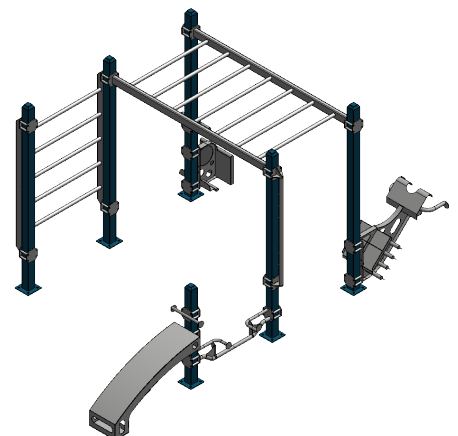

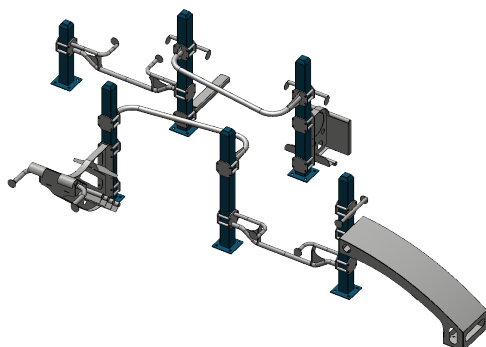

Cali-Rig 36

#OF-900-36



ASTM Use Zone: 111 ft² (10.3 m²)

ASTM Fall Height: N/A


Min. Pad Size: 22 ft x 26 ft (6.6 m x 7.9 m)

of Users: 7

of Stations: 7

STATIONS:

- Multi-grip push-up bar
- Calf raise step
- Thigh squat
- Lower back extension bench
- ADA height (34") parallel bars
- Sit-up bench

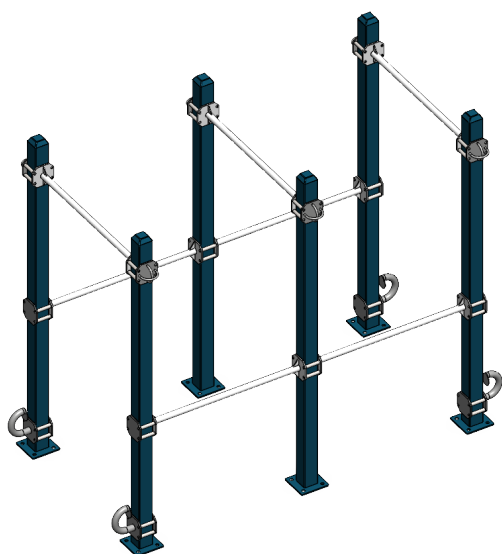

Cali-Rig 37

#OF-900-37



ASTM Use Zone: 627 ft² (58.3 m²)

ASTM Fall Height: 84 in (213 cm)

Min. Pad Size: 71 ft x 18 ft (21.6 m x 5.5 m)

of Users: 17

of Stations: 17

STATIONS:

- 84" straight pull-up bars (3)
- 42" straight pull-up bars (2)
- 36" straight pull-up bars (2)
- Cali-TRX mounts (6)
- Battle rope mounts (4)

Cali-Rig 38

#OF-900-38



ASTM Use Zone: 155 ft² (14.4 m²)

ASTM Fall Height: 84 in (213 cm)


Min. Pad Size: 23 ft x 24 ft (7.1 m x 7.3 m)

of Users: 10

of Stations: 10


STATIONS:

- Sit-up bench
- Lower back extension bench
- Parallel bars (42")
- ADA height (66") pull-up bar
- Multi-grip push up bar
- 84" multi-grip pull-up bar
- 84" straight pull-up bar
- 36" straight pull-up bar
- Cali-TRX mounts (2)

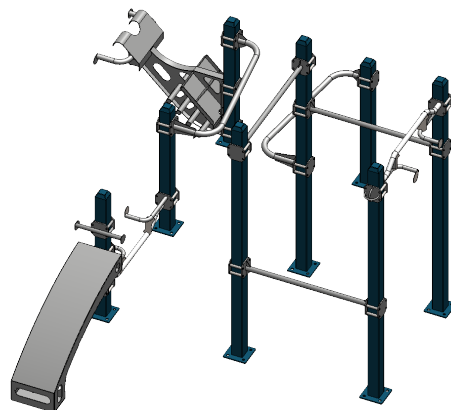

Cali-Rig 39

#OF-900-39



ASTM Use Zone: 88 ft² (8.2 m²)

ASTM Fall Height: 84 in (213 cm)

Min. Pad Size: 12 ft x 27 ft (3.5 m x 8.1 m)


of Users: 5

of Stations: 5

STATIONS:

- ADA height (34") parallel bars
- Parallel bars (42")
- 34" straight pull-up bar
- 84" straight pull-up bar
- ADA height (66") straight pull-up bar



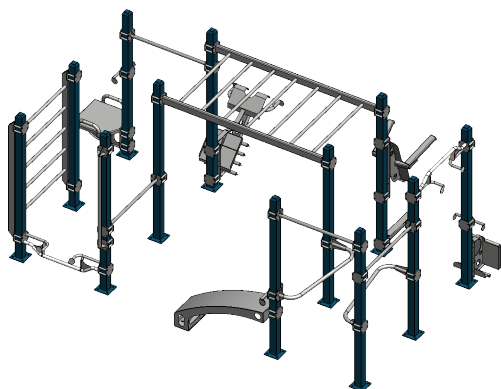

Cali-Rig 40

#OF-900-40

ASTM Use Zone: 302 ft² (28.1 m²)

ASTM Fall Height: 84 in (213 cm)

Min. Pad Size: 33 ft x 27 ft (10.1 m x 8.2 m)



of Users: 15

of Stations: 15

STATIONS:

- Swedish ladder
- Multi-grip push-up bar
- 84" multi-grip pull-up bar
- Sit-up bench
- 72" straight pull-up bar
- 36" straight pull-up bar
- ADA height (66") straight pull-up bar
- Parallel bars (36")
- Thigh squat + support handle
- Lower back extension bench
- Vertical knee raise + calf raise step
- Cali-Overhead ladder
- Plyo box
- Band stretching post

WHEN OFF-THE-SHELF JUST WON'T DO, GO CUSTOM WITH THE CALI-LINE

Not every community or organization fits into a one-size-fits-all box—and your outdoor fitness space shouldn't either. Cali-Line Customs gives you the freedom to design an outdoor gym that's tailored precisely to your space, fitness goals, users, and budget. Whether you're working with a tight urban footprint, aiming to serve multi-generational users, or need accessibility features built right in, our custom design process ensures your unique requirements are met.

From the ground up, you can collaborate directly with our engineering and design team to bring your vision to life. Want a completely original system built around your site plan? We can do that. Prefer to tweak an existing Cali-Line solution to better match your needs? That's just as easy. Cali-Line Customs makes it simple to go from idea to installation with expert guidance at every stage.

We understand that every square foot counts. That's why our custom equipment is purpose-built—engineered not only for durability and safety, but also for maximum functionality in any environment, from coastal parks to correctional yards.

Let's build something that fits
your users, your location, and your long-term goals.

**REACH OUT TODAY AND EXPLORE WHAT'S POSSIBLE
WITH CALI-LINE CUSTOMS.**



1-877-760-6337




info@outdoor-fit.com










AVAILABLE COLORS

All components undergo a multi-stage preparation process before powder coating. A zinc-rich primer is applied first, followed by your selected color. All standard colors use super durable, exterior-grade powder formulas for long-lasting protection from the elements.

Standard Colors



Custom Colors




MOUNTING OPTIONS

The upright posts used in the Cali-Line have three (3) available mounting options:


Surface Mount

A standard flange is shared across all posts, allowing for the secure installation of the upright posts using off the shelf concrete anchors installed in a standardized bolt pattern and spacing.




Concrete Foundation

Upright posts are mounted directly into custom engineered poured concrete foundations, designed for a wide variety of climate zones using readily available materials.



Combo Mount


Bolt-on post mounting units are installed directly into the custom engineered poured concrete foundations. Upright posts are secured to the mounting units using fasteners, similarly to the Surface Mount option.



CALI-CLAMP SYSTEM

The Cali-Clamp is an integrated high strength clamp which fastens securely to the upright posts using a standardized bolt pattern for the installation of tamper-resistant fasteners and bespoke low-profile hardware.


All items in the Cali-Line utilize the same fasteners and have the same torque specifications to standardize and simplify installation. The Cali-Clamp features a four (4) bolt pattern, allowing for a strong hold at a lower required torque per fastener, improving ease of installation.

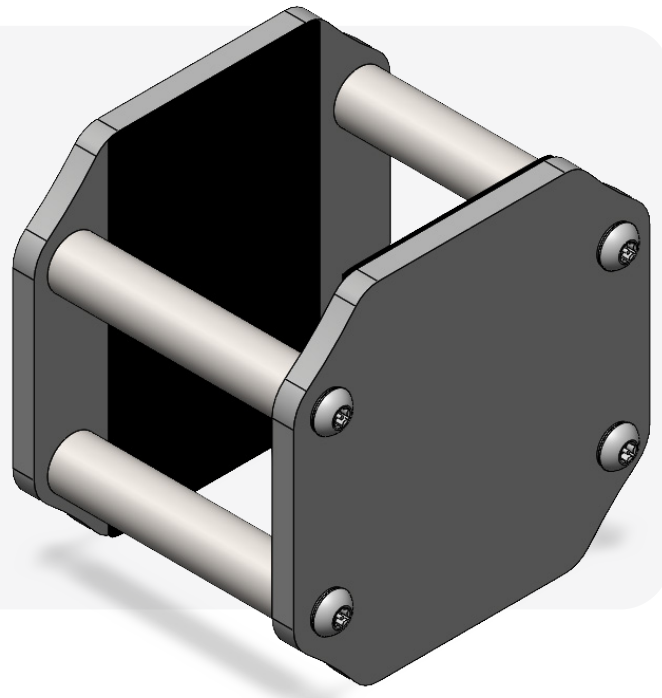

ACCESSORY ADD-ONS

Enhance nearly any Cali-Line Single or Rig by adding one or more of the below accessories to the open side of the Cali-Clamp:


TRX Mount




Battle Rope Mount




Cali-Grab Handle



Cali-Med Ball Target (Compact)



Cali-Med Ball Target (Tall)



Cali-2 Post Sign Mount



Cali-Site Sign Mount



WARRANTY, REPAIRS & REPLACEMENT POLICY

MANUFACTURERS WARRANTY

All products manufactured by Outdoor-Fit Exercise Systems (OFES) are warranted to be free of defects in materials and workmanship to the original purchaser only from the invoice date as follows:

Limited 15-Year Warranty: On all structural steel components, all stainless steel and aluminum fixed components, and all welds and hardware, with the exclusion of cosmetic damage.

REPAIRS & REPLACEMENTS

OFES retains the right to repair or replace improperly functioning equipment during the warranty period. Replacements or repairs will not extend the warranty period. OFES reserves the right to replace the failed component with a new or equivalent component. Contact OFES directly with warranty issues and questions before returning parts or attempting to repair unit.

The customer is responsible for all shipping related charges to return the defective part to OFES. Once warranty is confirmed by OFES, we will pay all the shipping related charges to return the warranty part to the customer at no cost to the customer. If a defect or damage involves a component or part that can reasonably be replaced or serviced by the customer, OFES will be responsible only for providing, at no charge, a replacement part and instructions.

LIMITATIONS

Warranty is valid only for OFES products that have been installed and maintained in conformance with OFES installation and maintenance procedures provided by OFES.

Warranties specifically do not cover OFES products:

- For cosmetic damage occurring during normal use, such as scratches, minor chips, hairline cracks, dents, marring, color fade, discoloration, or corrosion/rust.
- That have been modified, or altered in any way.
- That have not been used as designed or intended, or misused.
- That have been removed from original location and re-installed elsewhere.
- Or that have been damaged due to excessive wear and tear, vandalism, abnormal use, abuse, negligence, lack of maintenance, environmental factors, extreme weather and acts of God.