


SMART FLOW **B A C K I N G**

DRAINAGE RATE: > 900 IN. PER HOUR

- Smart Flow's wide gauge second layer primary backing creates small opening void of coating.
- These small openings allow liquids to pass through the backing while the coating still manages to encapsulate each backstitch of tufted yarn resulting in high strength tuft bind.
- Smart Flow includes traditional hole punch giving it additional drainage performance.

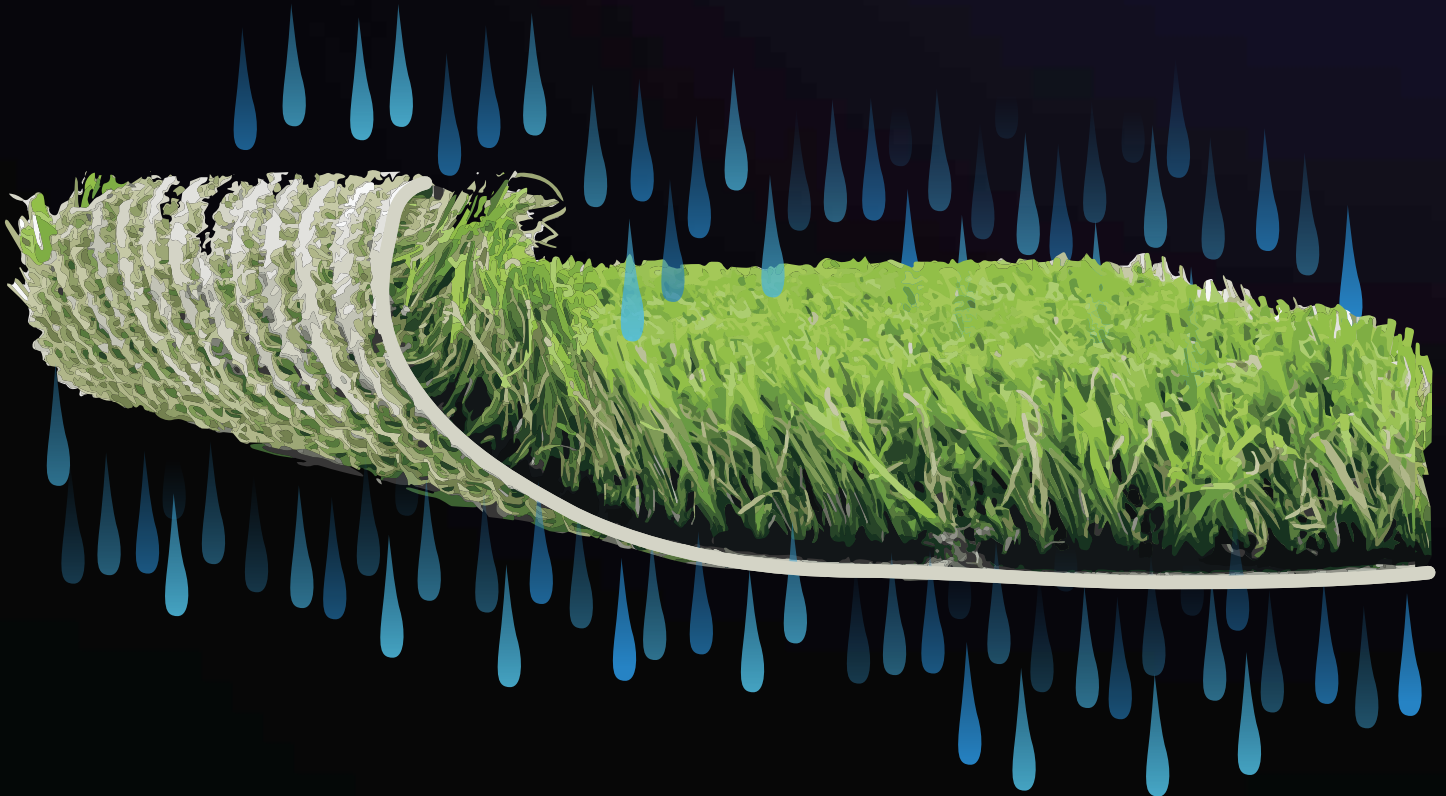

ASTM F1551 Water Permeable