


Dimensioni minime getto cemento armato

Minimum dimensions of the reinforced concrete casting
Dimensions minimales du coulage du ciment armé
Mindestgröße des Stahlbetonguss

Dimensioni minime getto cemento armato

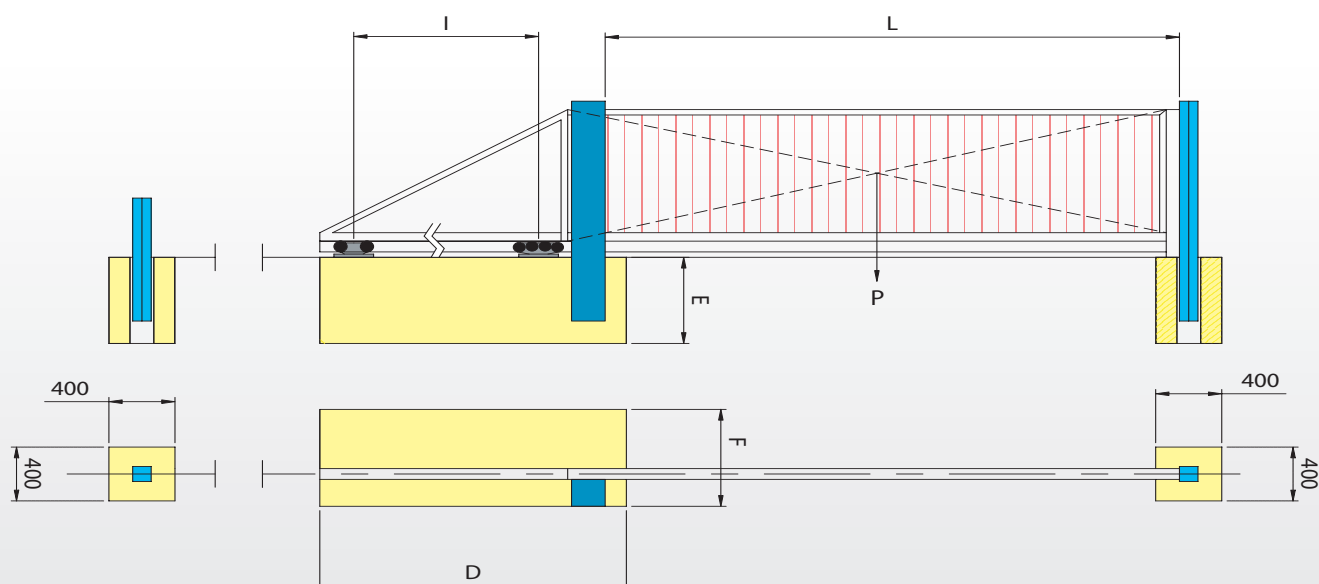

L = 3 m

P	E	D	F	I
[kg]	[m]	[m]	[m]	[m]
100	1,13	0,84	0,60	0,46
200	0,87	1,47	0,35	1,09
250	0,57	1,94	0,35	1,56
-	-	-	-	-

L = 6 m

P	E	D	F	I
[kg]	[m]	[m]	[m]	[m]
100	0,64	1,43	0,60	1,05
200	0,50	2,78	0,35	2,40
-	-	-	-	-
-	-	-	-	-

L = 9 m

P	E	D	F	I
[kg]	[m]	[m]	[m]	[m]
100	0,66	2,24	0,35	1,86
200	0,50	4,64	0,35	4,26
-	-	-	-	-
-	-	-	-	-

CGS-350M

L = 3 m

P	E	D	F	I
[kg]	[m]	[m]	[m]	[m]
200	1,01	1,11	0,80	0,61
300	0,85	1,51	0,60	1,01
400	0,52	2,08	0,60	1,58
500	-	-	-	-

L = 6 m

P	E	D	F	I
[kg]	[m]	[m]	[m]	[m]
200	0,74	1,90	0,60	1,40
300	0,73	2,79	0,35	2,29
400	0,50	4,16	0,35	3,66
-	-	-	-	-

L = 9 m

P	E	D	F	I
[kg]	[m]	[m]	[m]	[m]
200	0,73	3,06	0,35	2,56
300	0,50	4,72	0,35	4,22
-	-	-	-	-
-	-	-	-	-

CGS-350P

L = 3 m

P	E	D	F	I
[kg]	[m]	[m]	[m]	[m]
400	1,66	1,35	0,80	0,65
500	1,35	1,55	0,80	0,85
600	1,09	1,78	0,80	1,08
700	0,87	2,05	0,80	1,35

L = 6 m

P	E	D	F	I
[kg]	[m]	[m]	[m]	[m]
400	1,00	2,12	0,80	1,42
500	0,78	2,53	0,80	1,83
600	0,79	3,02	0,60	2,32
700	0,60	3,62	0,60	2,92

L = 9 m

P	E	D	F	I
[kg]	[m]	[m]	[m]	[m]
400	0,83	3,21	0,60	2,51
500	0,62	3,93	0,60	3,23
600	0,68	4,83	0,40	4,13
700	0,50	6,01	0,40	5,31

CGS-350G