




NATIONAL APPLIED CONSTRUCTION PRODUCTS

ECB[®] Classic

Crack Isolation Membrane

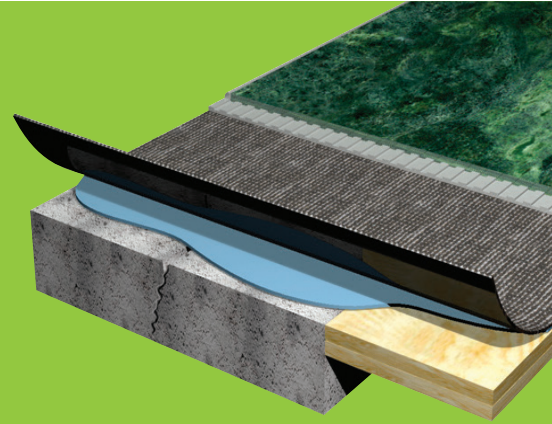

ECB[®] is a premium crack isolation membrane for surfaces that require protection from structural movement

ECB[®] Classic is a 40 mil (approx. 1/16") thick, self-adhering, sheet applied, elastomeric membrane designed for use under floor surfaces that require protection from structural movement. ECB[®] may be installed over concrete or wood substrates and over some existing hard surface flooring. When used under stone, ceramic or porcelain tile, wood and other hard surface flooring, ECB[®] can provide up to 3/8" of crack isolation protection. ECB[®] may be used with radiant heat and other tile warming systems.




Protect Your Floors

www.nacproducts.com

800.633.4622

ECB® Classic

Crack Isolation Membrane

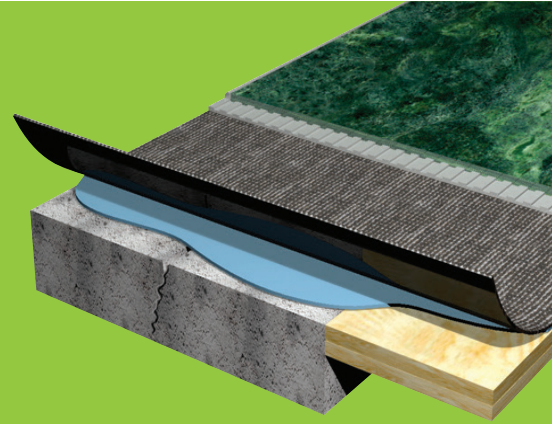

ECB® is the ideal solution for applications that require protection from structural movement such as **malls, airports, apartments, condominiums, multi-level hotels, high-rise office buildings** and any commercial or residential installations that require crack protection.

Features & Benefits

- Protects up to 3/8" lateral substrate movement
- Suitable for interior and exterior use
- Works with radiant heated floors and tile warming systems
- Exceeds ANSI A118.12 for crack isolation and A118.10 for waterproofing
- Protects against reflective cracking and delamination
- Safely covers asbestos flooring and provides an effective barrier against radon and mold
- Resists MVT up to 10#/1000 SF/24hrs when used with NAC TAC or NS97 primer and 7#/1000 SF/24hrs when used with NAC TAC II
- Reduces live and dead load failures
- Eliminates the need to cut tile to meet control/cold joints
- Tile can be installed the same day as membrane
- Can function as a waterproof membrane with proper treatment of butt joints and end seams
- Lifetime systems warranty
- Available in 3'x 50' rolls for full floor coverage and 2'x 50' and 1'x 50' rolls for strip applications

