


SAM[®] 3


Sound Control Membrane

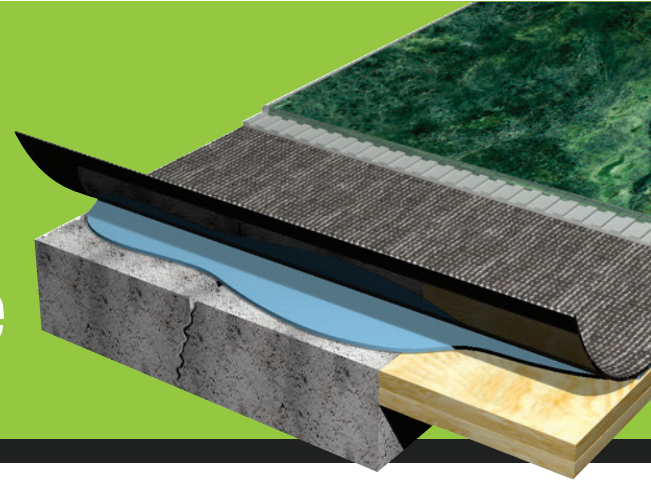

SAM[®] 3 is a premium sound abatement membrane for surfaces that require **impact and audible sound reduction.**


IIC 70, STC 67

SAM[®] 3 is a 90 mil thick (< 1/8") self-adhering, sound deadening sheet membrane chemically formulated to reduce impact (IIC) and airborne (STC) sound transmission. SAM[®] 3 is lab tested with a ceiling assembly and may be installed over concrete or wood substrates and over some existing hard surface flooring in applications with or without a sound rated ceiling assembly. When used under ceramic, porcelain, stone, wood and other hard surface flooring, SAM[®] 3 will also provide up to 3/8" of crack isolation protection.

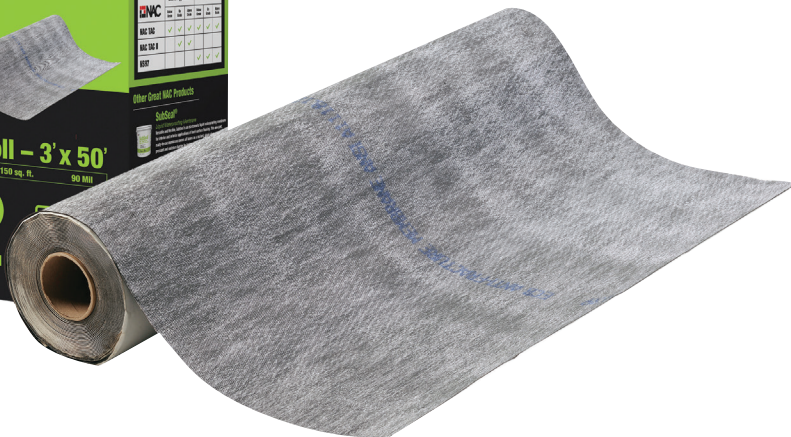

SAM[®] 3

Sound Control Membrane

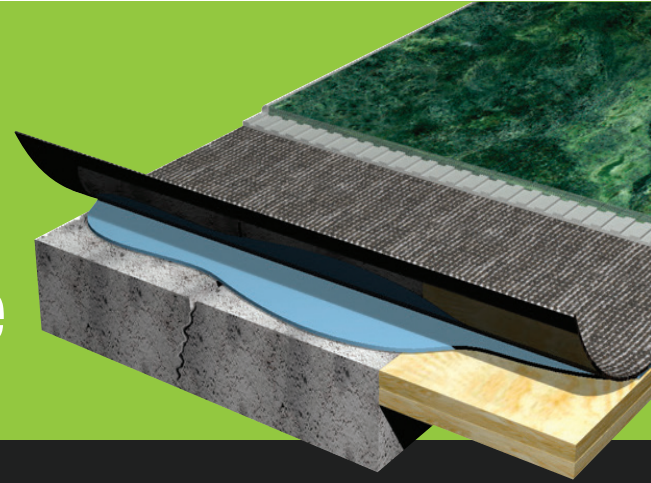

SAM[®] 3 is an ideal solution for applications requiring integrated sound abatement with a low profile installation such as **apartments, condominiums, classrooms, multi-family housing, hotels, high-rise office buildings media rooms, children's play areas** and other areas needing sound reduction.

Features & Benefits

- Suitable for interior and exterior use
- Meets ANSI A118.10, A118.12, A118.13
- Protects against reflective cracking and delamination
- Independent Lab Tested with a ceiling assembly IIC = 70 min
STC = 67 min
- Safely covers asbestos flooring and provides an effective barrier against radon and mold
- Resists Moisture Vapor (MVT) 10#/1000SF/24HRS when used with NAC TAC or NS97 Primer or 7#/1000SF/24HRS when used with NAC TAC II Primer
- Eliminates need to cut tile to meet control/cold joints
- No need to remove old floors or recess new ones
- Tile can be installed the same day as membrane
- Works with radiant-heated floors and tile warming systems
- Available in 3' x 50' rolls (150 Sq. ft.)

