




NATIONAL APPLIED CONSTRUCTION PRODUCTS

Super SAM[®]

Sound Control Membrane

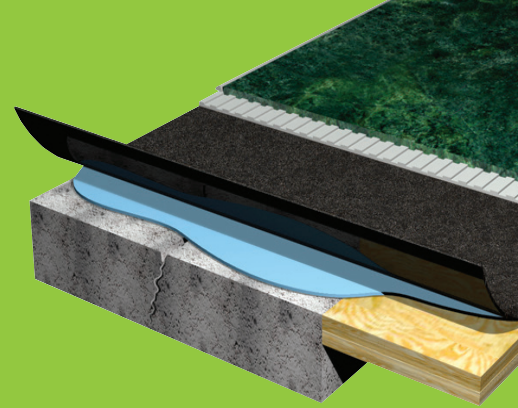

Super SAM[®] 125 is a premium sound abatement membrane for surfaces that require **impact and audible sound reduction**.

IIC 51, Δ IIC 22, STC 54 on a bare 6" concrete slab IIC 56 STC 61 over a wood joist substrate

Super SAM[®] 125 is a 125 mil (approx. 1/8") thick, self-adhering, sound deadening sheet membrane chemically formulated to reduce airborne (STC) and impact (IIC) sound transmission. Super SAM[®] may be installed over concrete or wood substrates and over some existing hard surface flooring. When used under stone, ceramic or porcelain tile, wood and other hard surface flooring, Super SAM[®], will also provide up to 3/8" of crack isolation protection. Super SAM[®] is the most effective all-in-one membrane on the market.




Protect Your Floors

www.nacproducts.com

800.633.4622

Super SAM[®]

Sound Control Membrane

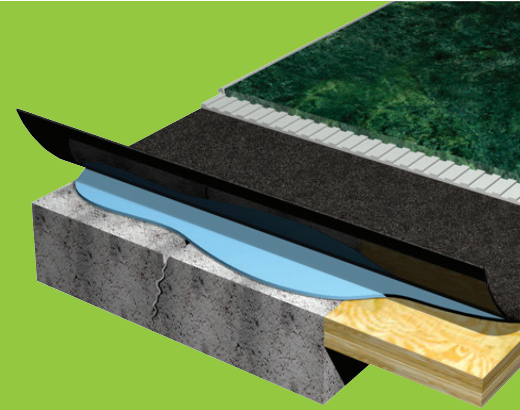

Super SAM[®] 125 is the perfect solution for applications requiring integrated sound abatement such as **apartments, condominiums, multi-level hotels, high-rise office buildings, media rooms, children's play areas**, and other areas needing sound reduction.

Features & Benefits

- Lab tested on a variety of surfaces
- IIC 51, ΔIIC 22, STC 54 over 6" concrete slab
- IIC 56 STC 61 over wood substrate
- IIC 51, STC 52 under hardwood flooring
- Provides up to 3/8" crack isolation protection and may also be used as a waterproof membrane
- Protects against reflective cracking and delamination
- Safely covers asbestos flooring and provides an effective barrier against radon and mold
- Resists Moisture Vapor Transmission (MVT) 10#/1000SF/24HRS when used with NAC TAC or NS97 Primer or 7#/1000SF/24HRS when used with NAC TAC II Primer
- Tile can be installed the same day as membrane
- Works with radiant-heated floors and tile warming systems
- Available in 3' x 50' rolls (150 Sq. ft.)

