


TERRAFLEX

**Highly permeable
surfacing for pathways,
tree surrounds, and more.**



Softline TerraFlex is a durable, permeable surface that can support light vehicle traffic and a high volume of water, with a flow rate of 21.38 gallons per square foot, per minute. Ideal for pathways, tree surrounds, and other projects, TerraFlex is comprised of recycled rubber crumb and aggregate mixed with a specialist binder, creating a aesthetically pleasing surface.

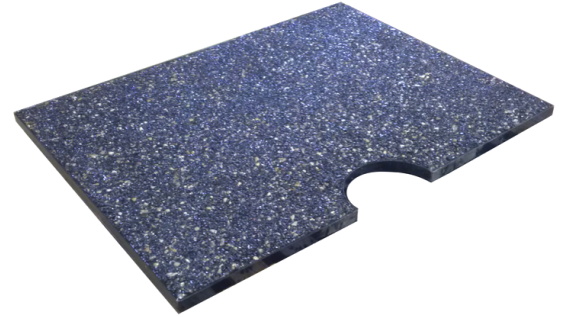