


SafeGlide® Gate Systems



Gates and Gate Hardware

Atlanta (770) 955-4411
Charlotte (704) 313-0300
Chicago (630) 426-0022
Denver (303) 288-1700
Tampa (813) 881-1200

SafeGlide® Aluminum Slide Gates



The SafeGlide® Aluminum Slide Gate from Pro Access Systems is engineered for safe, secure and easy operation in industrial, commercial and residential applications. Specify the gate alone, or request a complete, integrated solution with the gate operator and access control system that meet your project requirements.

High-Performance Features

- Durable construction to endure stresses and extend the life of the gate and gate operator
- The look of steel with the lighter-weight, corrosion-resistant, high-cycle, high-speed operation
- Robust movement mechanism for long-term performance
- Enclosed track for safety, reducing liability risks
- Truck assembly with 2-inch, permanently sealed bearings for maintenance-free operation
- Three-year limited warranty

Specifications at a Glance

- For openings measuring from 10 ft. to 180 ft.
- Manual or automatic operation
- Single-track, twin-track, micro-box frame or macro-box frame system type
- Gate customization services available

SafeGlide® Engineered Series

- Crash Rated slide gates up to 30 ft.
- Telescopic slide gates up to 250 ft.
- Rolling gates up to 600 ft.

Engineered for Compliance

All our access control solutions comply with the UL 325 safety standard.

Learn more at UL325.com.

Standard Cantilever Sliding Gate Dimensions

Single-Track Cantilever Slide Gate

OPENING	COUNTER BALANCE	COUNTER BALANCE POSTS (INSIDE TO INSIDE)	GATE PROPER LENGTH	OVERALL LENGTH	GRADE CLEARANCE
10'	6' - 6"	5' - 6"	10' - 6"	17' - 0"	5"
12'	6' - 6"	5' - 6"	12' - 6"	19' - 0"	5"
14'	8' - 6"	7' - 6"	14' - 6"	23' - 0"	5"
16'	8' - 6"	7' - 6"	16' - 6"	25' - 0"	5"
18'	10' - 0"	9' - 0"	18' - 6"	28' - 6"	5"
20'	10' - 0"	9' - 0"	20' - 6"	30' - 6"	5"
22'	10' - 0"	9' - 0"	22' - 6"	32' - 6"	5"
24'	12' - 0"	11' - 0"	24' - 6"	36' - 6"	5"
26'	12' - 0"	11' - 0"	26' - 6"	38' - 6"	5"
28'	12' - 0"	11' - 0"	28' - 6"	40' - 6"	5"
30'	12' - 0"	11' - 0"	30' - 6"	42' - 6"	5"

Twin-Track Cantilever Slide Gate

OPENING	COUNTER BALANCE	COUNTER BALANCE POSTS (INSIDE TO INSIDE)	GATE PROPER LENGTH	OVERALL LENGTH	GRADE CLEARANCE
32'	16' - 0"	15' - 0"	32' - 6"	48' - 6"	5"
34'	16' - 0"	15' - 0"	34' - 6"	50' - 6"	5"
36'	16' - 0"	15' - 0"	36' - 6"	52' - 6"	5"
38'	16' - 0"	15' - 0"	38' - 6"	54' - 6"	5"
40'	16' - 0"	15' - 0"	40' - 6"	56' - 6"	5"

Micro-Box Frame Cantilever Slide Gate

OPENING	COUNTER BALANCE	COUNTER BALANCE POSTS (INSIDE TO INSIDE)	GATE PROPER LENGTH	OVERALL LENGTH	GRADE CLEARANCE
42'	16' - 0"	15' - 0"	42' - 6"	58' - 6"	5"
44'	18' - 0"	17' - 0"	44' - 6"	62' - 6"	5"
46'	18' - 0"	17' - 0"	46' - 6"	64' - 6"	5"
48'	20' - 0"	19' - 0"	48' - 6"	68' - 6"	5"

Macro-Box Frame Cantilever Slide Gate

** Sizes based on 6-5/8" or 6" Square Post Application **

OPENING	COUNTER BALANCE	COUNTER BALANCE POSTS (INSIDE TO INSIDE)	GATE PROPER LENGTH	OVERALL LENGTH	GRADE CLEARANCE
50'	22' - 6"	21' - 0"	50' - 8"	73' - 2"	5"
52'	22' - 6"	21' - 0"	52' - 8"	75' - 2"	5"
54'	24' - 6"	23' - 0"	54' - 8"	79' - 2"	5"
56'	24' - 6"	23' - 0"	56' - 8"	81' - 2"	5"
58'	26' - 6"	25' - 0"	58' - 8"	85' - 2"	5"
60'	26' - 6"	25' - 0"	60' - 8"	87' - 2"	5"
62'	28' - 6"	27' - 0"	62' - 8"	91' - 2"	5"
64'	28' - 6"	27' - 0"	64' - 8"	93' - 2"	5"
66'	28' - 6"	27' - 0"	66' - 8"	95' - 2"	5"
68'	30' - 6"	29' - 0"	68' - 8"	99' - 2"	5"
70'	30' - 6"	29' - 0"	70' - 8"	101' - 2"	5"
72'	32' - 6"	31' - 0"	72' - 8"	105' - 2"	5"
74'	32' - 6"	31' - 0"	74' - 8"	107' - 2"	5"
76'	34' - 6"	33' - 0"	76' - 8"	111' - 2"	5"
78'	34' - 6"	33' - 0"	78' - 8"	113' - 2"	5"
80'	36' - 6"	35' - 0"	80' - 8"	117' - 2"	5"

NOTE


Any Gate/Frame Style is compatible in smaller sizes. However, size limitations per style are listed in the charts.

For more information contact:


PRO ACCESS 630. 426.0022

SafeGlide® Aluminum Slide Gates


Single-Track

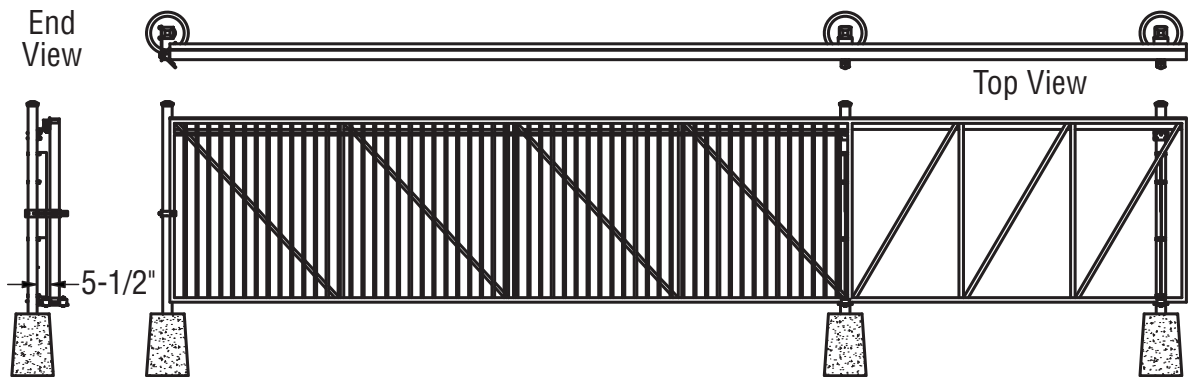


Twin-Track

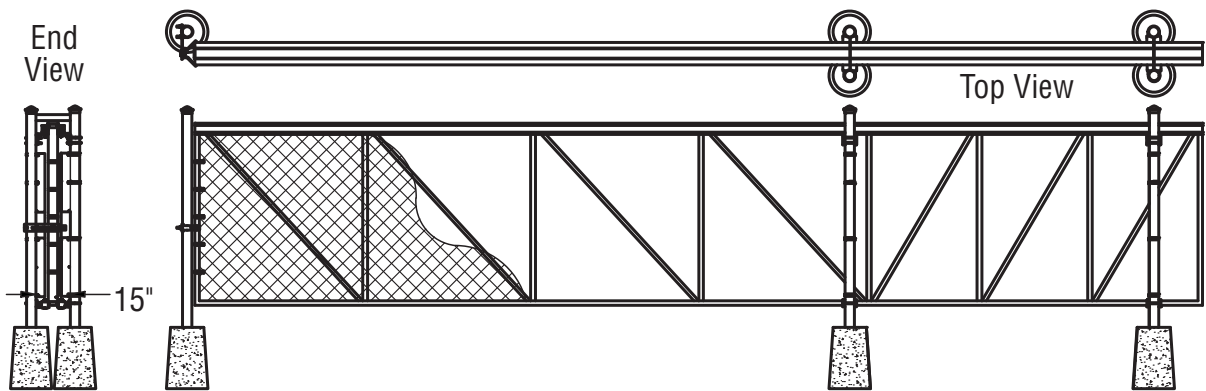

Single-Track

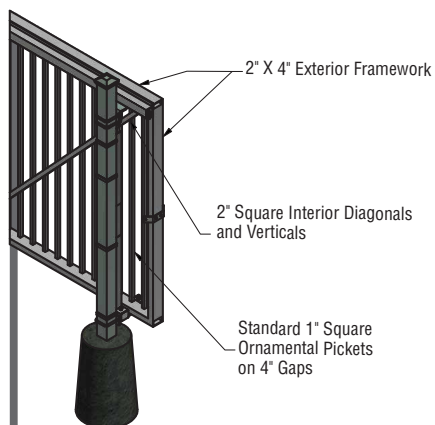

Twin-Track

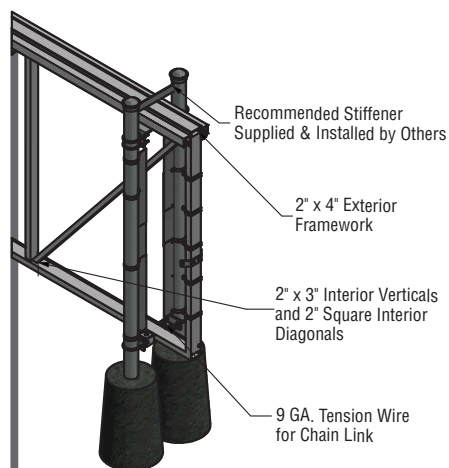


ORNAMENTAL CANTILEVER GATE SAFETY WARNING


SafeGlide Ornamental cantilever gates are supplied with 2" (or less) mesh safety screening in sufficient quantities to cover the entire gate and an equal portion of fence parallel to the gate in the open position up to 6 feet from ground elevation. Also included with each SafeGlide gate are baffle kits used to fill the gaps between posts and the movable gate. These safety components and any other ASTM F2200 safety requirements are the sole responsibility of the installer and must be included when the SafeGlide gate when it is installed with an automatic operator. Pro Access Systems Inc. assumes no responsibility for gate installations that fail to utilize the materials provided or meet the applicable safety standards.

SafeGlide® Aluminum Slide Gates


Micro-Box

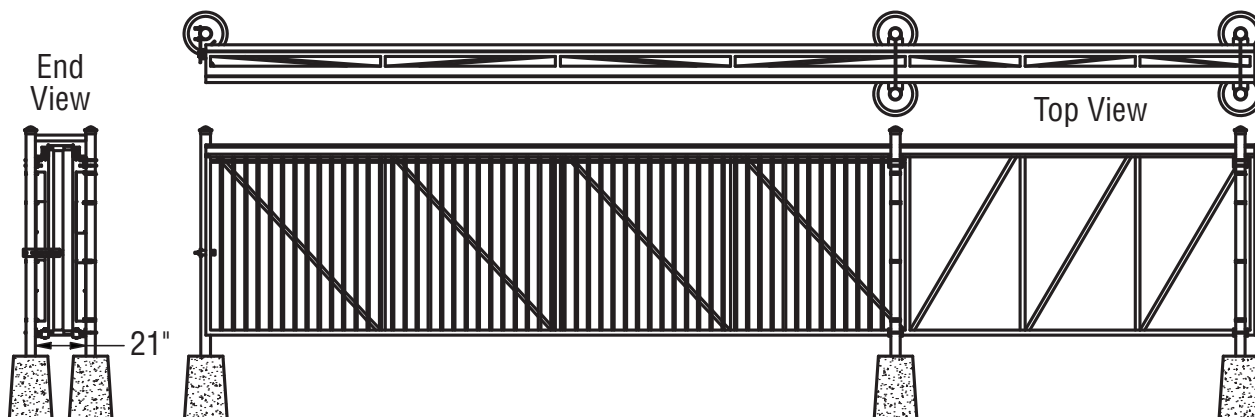


Macro-Box

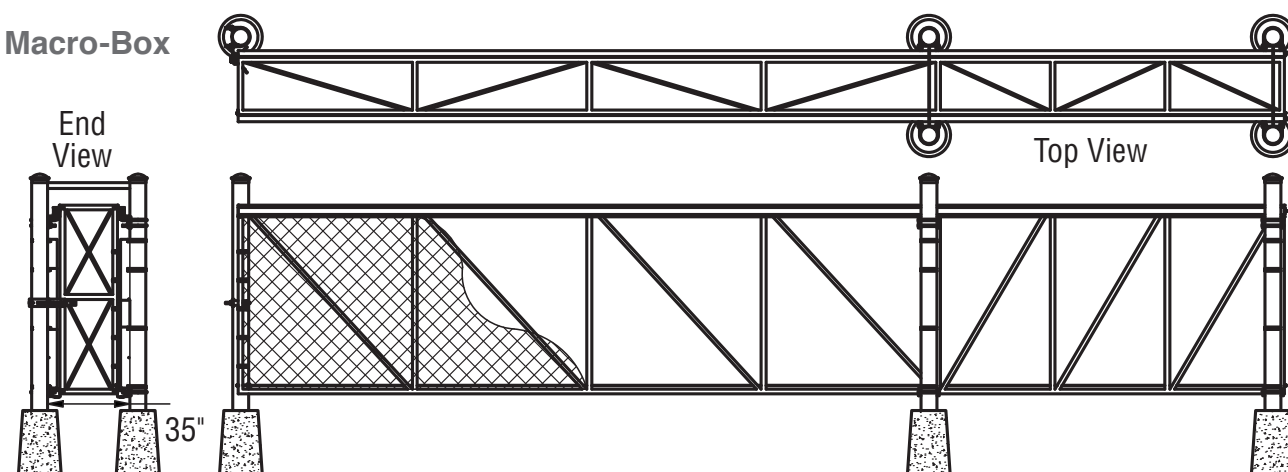

Micro-Box

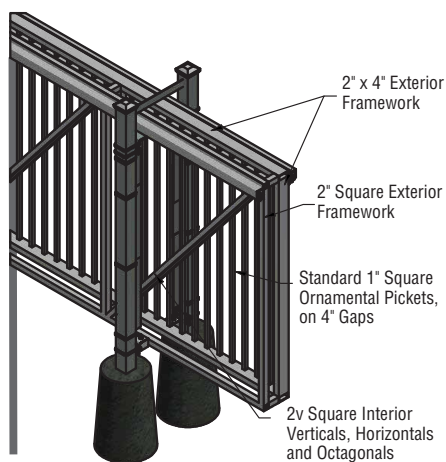

Macro-Box

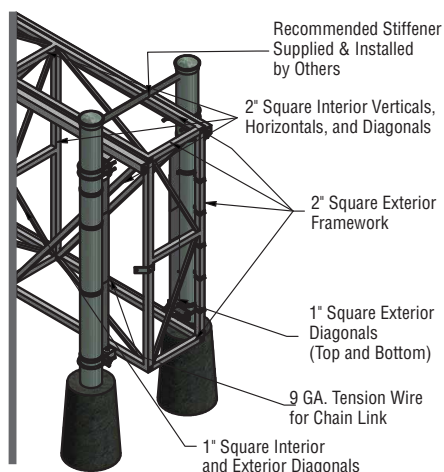

ORNAMENTAL CANTILEVER GATE SAFETY WARNING

SafeGlide Ornamental cantilever gates are supplied with 2" (or less) mesh safety screening in sufficient quantities to cover the entire gate and an equal portion of fence parallel to the gate in the open position up to 6 feet from ground elevation. Also included with each SafeGlide gate are baffle kits used to fill the gaps between posts and the movable gate. These safety components and any other ASTM F2200 safety requirements are the sole responsibility of the installer and must be included when the SafeGlide gate when it is installed with an automatic operator. Pro Access Systems Inc. assumes no responsibility for gate installations that fail to utilize the materials provided or meet the applicable safety standards.

SafeGlide® Aluminum Swing Gates



The SafeGlide® Aluminum Swing Gate from Pro Access Systems provides safe, secure and access control for industrial, commercial and residential sites. Specify the gate alone, or request a complete, integrated solution with the gate operator and access control system that meet your project requirements..

High-Performance Features


- Durable aluminum construction to endure stresses, prevent rusting and extend the life of the gate operator
- The look of steel with the lighter-weight, corrosion-resistant, high-cycle operation
- All welded construction for greater frame strength and rigidity
- Precision-machined, permanently lubricated hinges for long-term performance
- Three-year limited warranty

Specifications at a Glance


- Manual or automatic operation
- For openings measuring from 3 ft. to 90 ft.
- Standard or micro-box frame
- Gate customization services available

SafeGlide® Gate Styles


8000




8300




8500R




8100




8300R



8600



8100R




8400



8600R




8200




8400R



8700 Louver




8200R



8500



8800 - Infill



SafeGlide® Custom Swing Gates



Industrial Louvered Slide Gate



Custom Grilled Swing Gates



Privacy Slide Gate



Privacy Swing Gates

The SafeGlide® Custom Aluminum Gate Series from Pro Access Systems is engineered for safe, secure and easy operation in industrial, commercial and residential applications. Specify the gate alone, or request a complete, integrated solution with the gate operator and access control system that meet your project requirements.

High-Performance Features

- Durable construction to endure stresses and extend the life of the gate and gate operator
- The look of steel with the lighter-weight, corrosion-resistant, low-maintenance benefits of aluminum
- Refined structural engineering, specially tested for high-wind, high-cycle, and slide gate high-speed operation
- Robust movement mechanism for long-term performance
- Enclosed track on slide gates for safety, reducing liability risks
- Truck assembly with 2-inch, permanently sealed bearings for maintenance-free operation on slide gates and precision-machined, permanently lubricated hinges for long term performance on swing gates
- Three-year limited warranty

Specifications at a Glance

- Manual or automatic operation
- For openings measuring from 10 ft. to 180 ft. on slide gates and 3 ft. to 90 ft. on swing gates
- Single-track, twin-track, micro-box frame or macro-box frame depending on type of gate
- Engineering and design services available




Economy Louvered Swing Gates




Custom Laser Cut Patterns


SafeGlide® Pedestrian Swing Gates

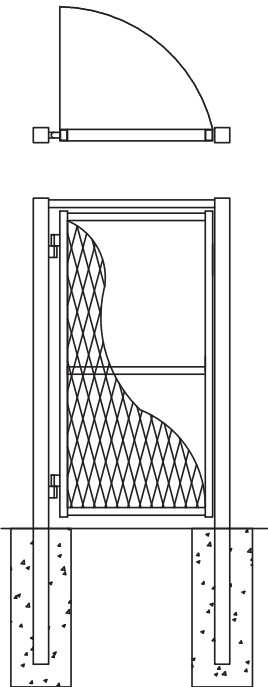


Pedestrian Swing Gate

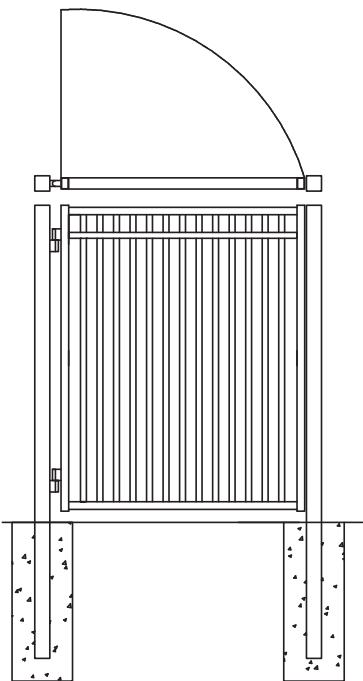

Single Swing Gate

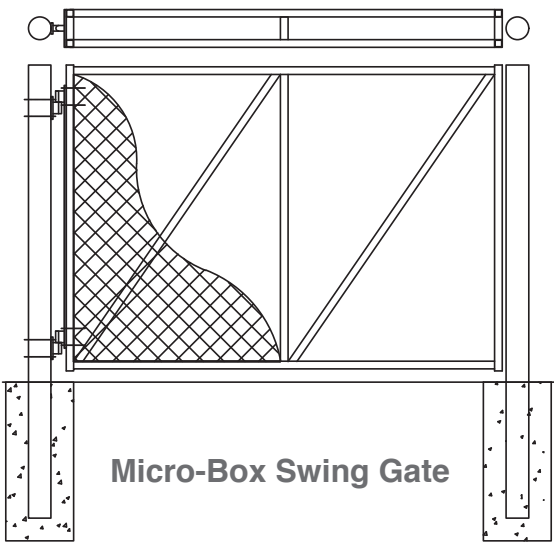

Micro-Box Swing Gate

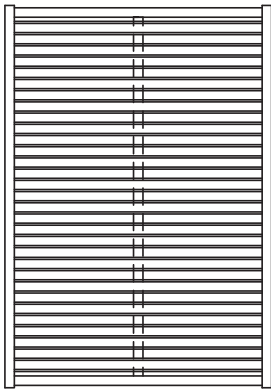

Louver Panel




Crash Deterrent Slide Gate


Vertical Louvered Slide Gate

SafeGlide® Gate Hardware Kit


SafeGlide Adjustable Catch

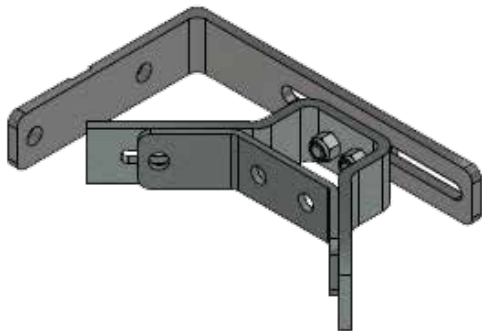


SafeGlide Truck Hanger Bracket




6-5/8" or 4" Round




SafeGlide Single Wheel Guide

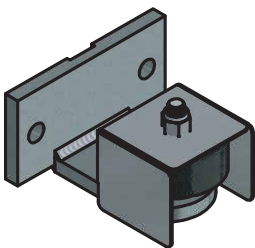

SafeGlide Double Wheel Guide

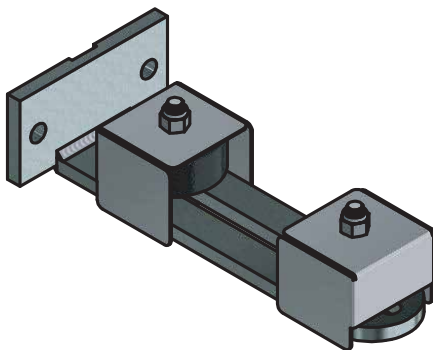


6" or 4" Square




U Bolts Options

SafeGlide Truck Assembly

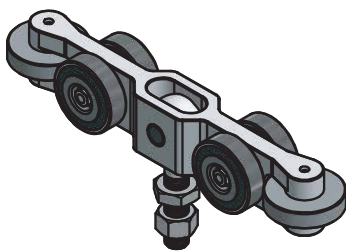


SafeGlide Track Extrusion and Stop Assembly




6-5/8" or 4" Round




6" or 4" Square

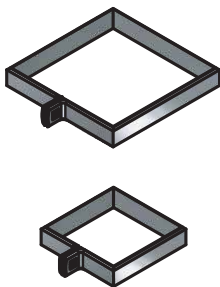


Barb Arm Kit

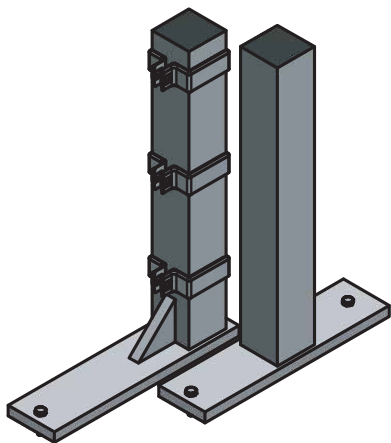

Tension Band

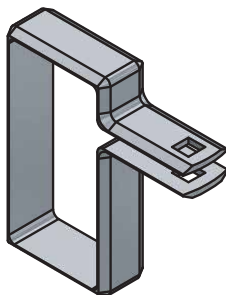

UL325 Baffle Kit

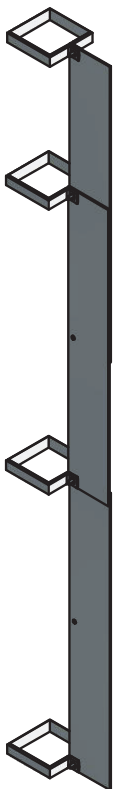

SafeGlide® Cantilever Gate Roller

The SafeGlide® Cantilever Gate Roller from Pro Access Systems can be used with most cantilever gates.

High-Performance Features

- Exceptional engineering and design for durability, extending the life of the gate and gate operator
- Robust movement mechanism for high-cycle, high-speed operation
- Dupont™ Delrin® injection molded wheel for smooth, quiet movement
- High-precision roller for water resistance and industry's best overall temperature range
- Integrated polyurethane cover for safety, reducing liability risks and ensuring UL 325 compliance
- UV stabilizers for long-lasting performance
- Two-inch permanently sealed bearings for maintenance-free operation
- Bearings inserted and encompassed during injection molding for industry's best bearing and performance
- Three-year limited warranty

Specifications at a Glance

- Manual or automatic gate operation
- Roller: 6 inches, 18,000-pound PSI rating
- Bearings: 3,100-pound rating, injection-molded for 2 3/8-inch round pipe, press-fit for 2-inch square pipe
- Mounting bracket: yellow zinc chromate for 4-inch O.D. pipe, 1-inch steel roller shaft (also available for 6 5/8-inch O.D., 4- and 6-inch square)
- Made in the USA



SafeGlide® Hinge System

The SafeGlide® Hinge System from Pro Access Systems can be used with most swing gates, including the SafeGlide Aluminum Swing Gate.

High-Performance Features

- Precision-machined from steel or aluminum to endure stresses and extend the life of the gate and gate operator
- Robust movement mechanism for long-term performance
- Offset design for safety, reducing liability risk
- Oil-impregnated bronze bushings for maintenance-free operation
- Three-year limited warranty

Specifications at a Glance

- Manual or automatic operation
- Available in 2- or 3-inch spacing
- Available in steel and /or aluminum upper and lower blocks
- Made in the USA



About Pro Access Systems

Pro Access Systems is a leading single-source provider of integrated access control solutions and expert technical support for industrial, commercial and residential applications. Since 1990, Pro Access has partnered with contractors, installers, architects and engineers to deliver high-quality design, products and services for complete access control.

With Pro Access, ensure complete access control for:

Distribution centers | Municipal facilities | Corporate headquarters
Military bases | Airports | Banks | Institutions | Car dealerships | Estates
Residential communities | Apartment complexes | And more . . .

www.G8Pro.com

ATLANTA

2052 Airport Court
Suite A Marietta, GA 30060
Georgia@G8Pro.com
770-955-4411
770-955-4422 (fax)

CHARLOTTE

2716 Interstate Street, Suite A
Charlotte, NC 28208
NorthCarolina@G8Pro.com
704-313-0300
704-672-4678 (fax)

CHICAGO

116 Paul Street
Elburn, IL 60119
Illinois@G8Pro.com
630-426-0022
630-620-0063 (fax)

DENVER

6185 E. 56th Avenue, Unit E
Commerce City, CO 80022
Colorado@G8Pro.com
303-288-1700
303-288-7709 (fax)

TAMPA

5711 Johns Road, Suite 1309
Tampa, FL 33634
Florida@G8Pro.com
813-881-1200
813-881-1233 (fax)