

*Winter
Holiday*
DECOR

VERSION
1

CATALOGUE



Classic Displays
Right for you since 1977



Snow Burst

5'

\$620



Snowflake

4'

\$735



Snow Flurry

4'

\$820



Snow Blossom

5'


\$915



Snow Diamond

4.5'

\$935

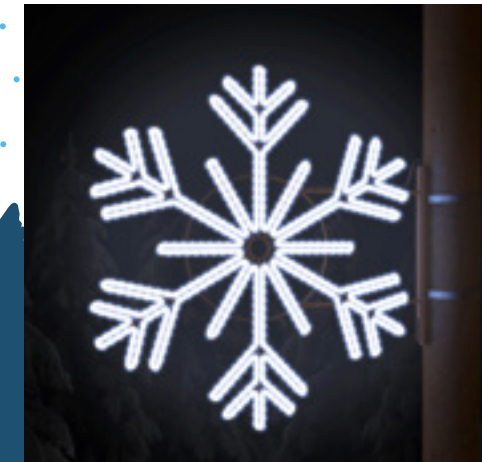

Snow Spark

4'

\$999



Snow Spear

5'


\$1045



Snow Fall

7'


\$1045

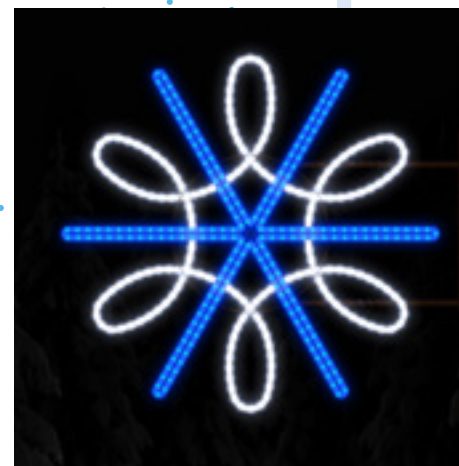

Snow Storm

3.4'

\$1045

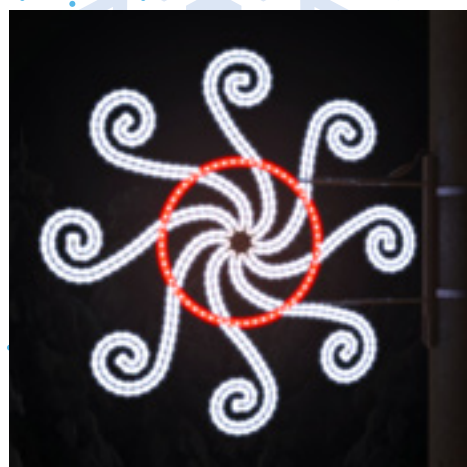

Snow Swirl

5'


\$1060



Frostbite

4.6'

\$1150

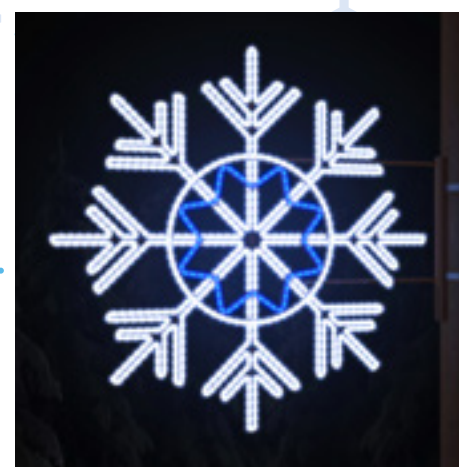

Snow Crystal

5'

\$1150



Snow Flurry Pole Mount

Galt on the Grand
Cambridge, Ontario



Snow Crystal

Ancaster Business Improvement Area
Ancaster, Ontario





Half Snow Flurry

4'

\$650



Half Snow Crystal

4'

\$845



Snowflake Pole Mount

4'

\$895



Snow Flurry Pole Mount

6'

\$995



Snow Diamond Pole Mount

5'

\$1095



Snow Spear Pole Mount

5'

\$1265



Shooting Star

5'


\$625



North Star

4.5'

\$850

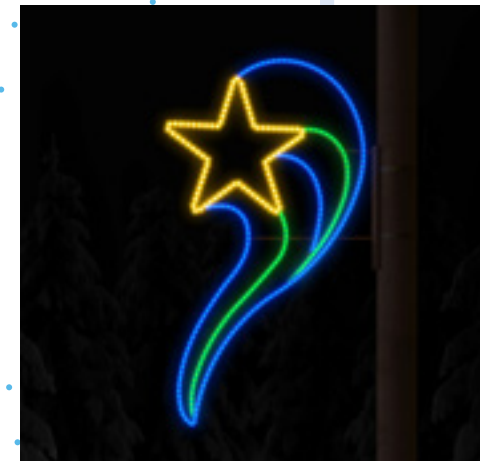

Star Trail

6'

\$895



Tri Star

7'

\$995




Rising Star

5'

\$1095

*All prices listed are in CAD - taxes, shipping and installation additional

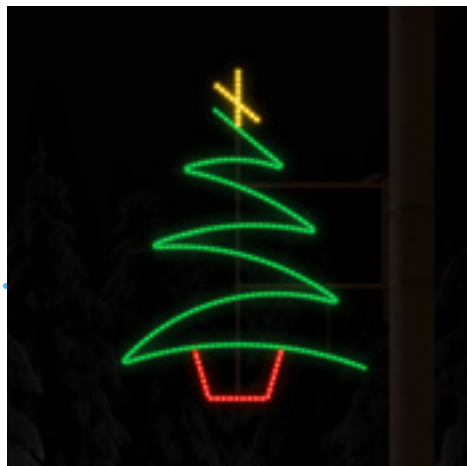

Zig Zag Tree

5'

\$635



Spruce Tree

7'

\$675



Triangle Tree

6.2'

\$645



Poinsettia

4.3'

\$825



Snowflake

Downtown Halifax
Halifax, Nova Scotia




Snow Fall

Uptown Saint John
Saint John, New Brunswick



Star Trail

Windsor, Ontario

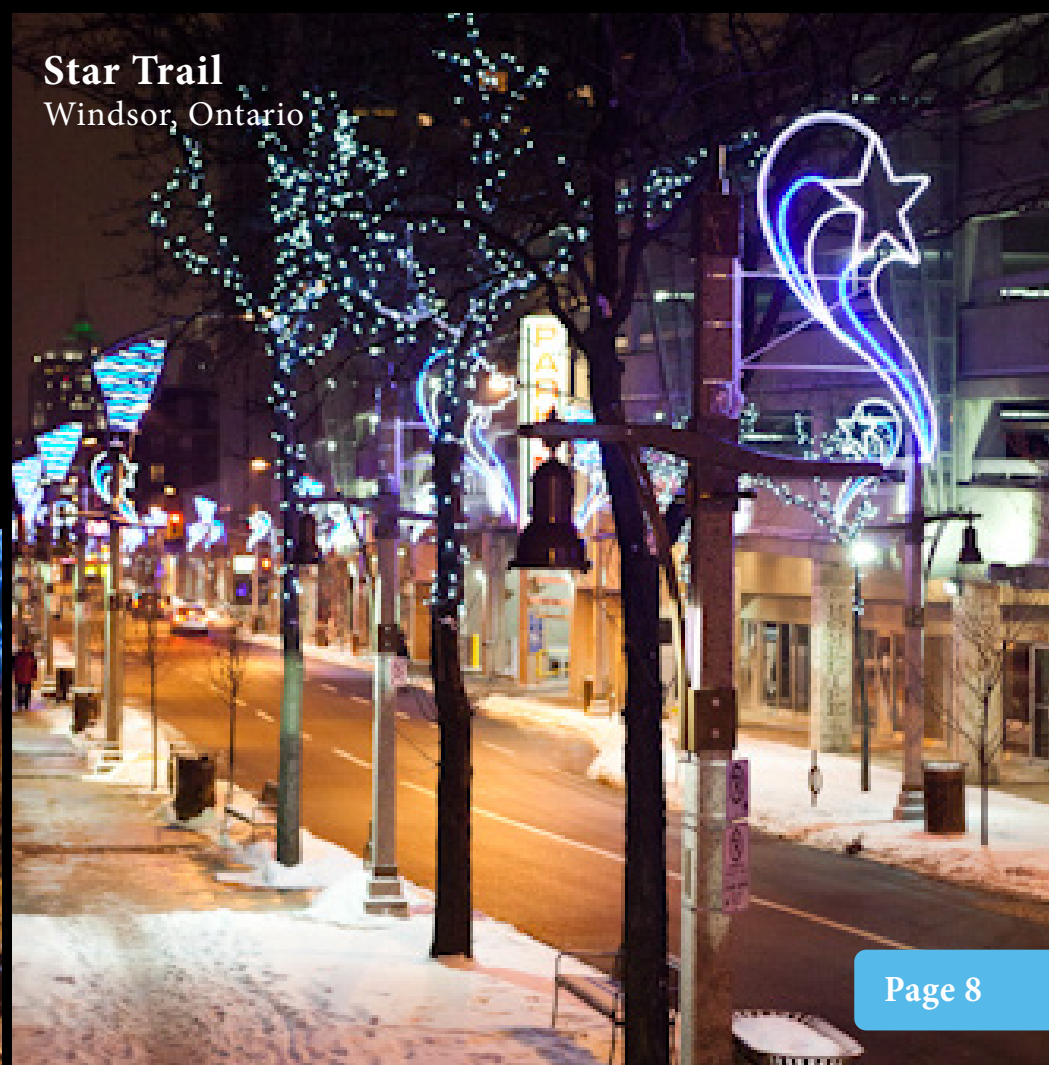

Snow Flurry

Uptown Saint John
Saint John, New Brunswick






Candy Cane

6'

\$615

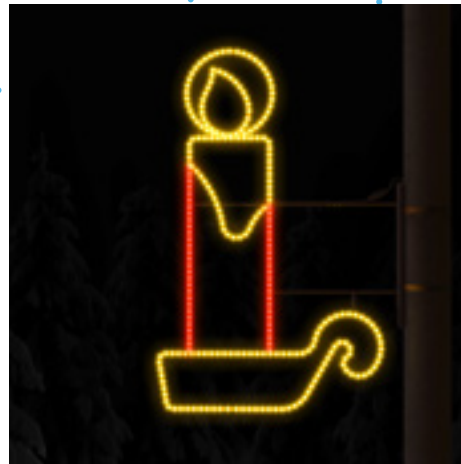

Side Mount Candle

5'

\$769



Reindeer

7'

\$815



Snowman

4'

\$929



SPECIFICATIONS

MATERIALS

- Zinc Plated Steel Frame and Mounting Bracket for Maximum Rust Protection
- 1/2" Commercial Grade 120V LED Rope Light with 1" Diode Spacing
- All display items are equipped with 120 VAC plugs with 5.25' (63") cabling for connection to duplex receptacle
- All Units are CSA Approved

FINISHES

- Powdercoated Steel Frame (White) and Mounting Bracket (Black)
- Rope Light Colour Options Include: Warm White, Pure White, Blue, Green, Yellow, Red, Orange, Pink, and Purple
- Optional Colour Match Mounting Bracket
- Optional Wall Mount Application
- Optional Aluminum Frame

TO SPECIFY

- Side Mount or Wall Mount
- Rope Light Colour
- Optional Colour Match Mounting Bracket
- Optional Aluminum Frame



*Colour
Options*

* Contact sales rep for more information on rope light colours

Zig Zag Tree
Millbrook, Ontario




Snow Spear
Lincoln, Ontario



Snow Diamond
Hillcrest Village BIA
Toronto, Ontario






MOUNTING BRACKET (POLE PLATE)

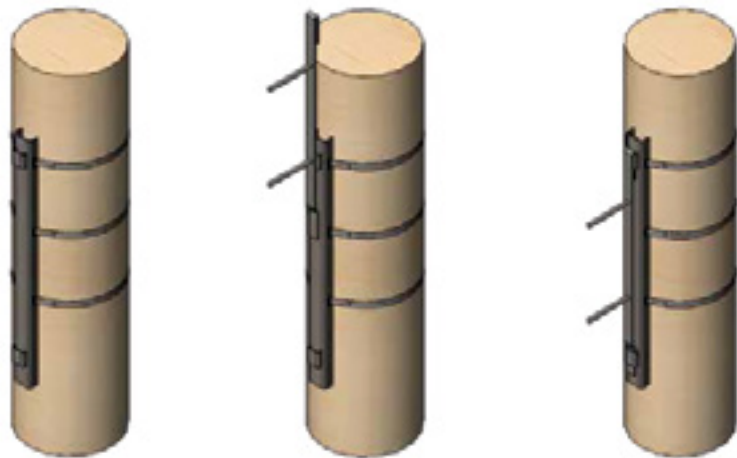

FEATURES

- Installation to be completed according to manufacturer's specifications
- Mounting bracket is zinc plated and powdercoated for durability
- Mounting bracket suitable for installation of permanent or temporary side mount pole display
- All dimensions are true and reflect manufacturer's specifications
- Not to scale drawing

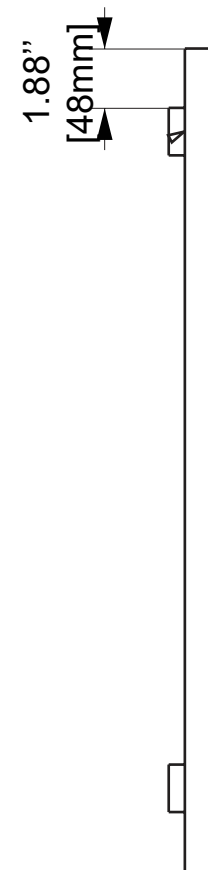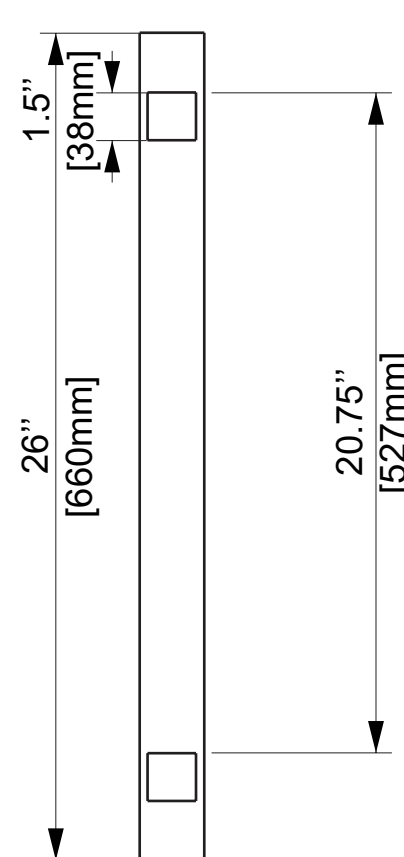

MATERIALS

- 2"x1"x1/8" A36 structural steel channel
- 1-1/2"x1/2"x1/8" A36 structural steel channel
- 5/8" wide 0.03 thick stainless steel banding two places

WARRANTY

PRODUCT WARRANTY

Classic Displays warrants to the original owner of a Classic Displays product for five (5) years from the date of substantial completion, that the product they receive will be free from defective workmanship and materials when subjected to proper and normal uses.

LIGHTING WARRANTY

Classic Displays warrants to the original owner of a Classic Displays product for one (1) year on all LED lighting from the date of substantial completion, that the product they receive will be free from defective workmanship and materials when subjected to proper and normal uses.

LIMITATIONS OF LIABILITY

Classic Displays shall not be liable for any consequential damages that products may receive through incorrect usage, rough handling, adverse environmental conditions, damage caused by the public or animals, or used in conjunction with materials harmful to products (i.e salt). Maintenance work is not considered a warranty issue.

INSURANCE, LICENSES AND ACCREDITATION

- Classic Displays is registered with WSIB and remains in good standing
- Classic Displays is a member of ContractorCheck and ComplyWorks
- \$5,000,000.00 in Commercial General Liability Insurance is carried by Classic Displays

* Acceptance of Merchandise: Claims of products that are lost or damaged in transit are the responsibility of the customer in reporting the claim. When accepting shipment, missing cartons or visible damage must be noted on delivery driver's bill of lading/receipt of delivery, and reported to our office. Claims must be filed with the delivering carrier as soon as possible or may result in refusal of claim by the carrier.

Classic Displays warrants that should defects occur with a Classic Displays product, the company herein recognizes that it will produce a replacement product and ship it to the original owner at no charge. In the event that defective materials are received, please advise us our office immediately to expedite replacement materials.



LED Orbs
Downtown Kingston
Kingston, Ontario

*For custom displays - contact us for more details

LED DISPLAY USAGE GUIDE

GENERAL REQUIREMENTS

1. Power requirements for LED displays are standard 120VAC (60 HZ, 1.25A)
2. Ground fault interrupter (GFI) protection should be provided on circuit or outlet
3. Use only outdoor extension cords, such as type SOW, STW, SJOW or SJTW

POLE TOP

1. Installation works best with a team of 3 (one in a bucket truck, one on a ladder and one on the ground)
2. Test all units prior to installation on poles (New units are tested at our facility prior to shipping)
3. Bring the display to the top of the pole using the bucket and hold in place over the light fixture
4. Individual on the ladder places the bracket around the pole and secures with bolts (snug but not too tight)
5. Individual on the ground will spot to ensure safety and that the bracket of the display is straight with the light/roadway
6. Individual on the ladder, tightens the nuts and bolts and plugs the display in, securing any extra power cord with zip ties

INSTALLATION

1. Test all units prior to installation on poles (New units are tested at our facility prior to shipping)
2. Secure mounting bracket (pole plate) (included) to pole using 5/8" stainless steel strapping with .03" thickness. Use 2-3 bands per mounting bracket (pole plate), depending on weight of display
3. Insert display into mounting bracket (pole plate). Refer to installation instructions for more details
4. Recommended clearance above roadway is 18' from bottom of display
5. Recommended clearance above sidewalk is 9.5' from bottom of display

SIDE MOUNT

STORAGE

1. Power-wash displays to remove any road salt/grime prior to storage during off-season (strongly recommended)
2. Store displays indoors and away from direct sunlight in a dry environment
3. Store displays hanging by mounting portion of frame or upright on the mounting portion of the frame
4. Do not stack items on top of displays, or store displays on top of each other

MAINTENANCE/CARE

1. Grasp plug and remove from receptacle or other outlet device. Do not unplug by pulling on the cord
2. If no power to display unit, verify power supply, then check fuse in male plug under access cover
3. Disconnect power before replacing fuse. Use only 5 Amps, 125 Volt fuse
4. Carefully remove old fuse and replace fuse. Reinstall fuse cover
5. Rope light fails in 3' sections (red and orange rope light fails in 5' sections). Should section failure occur, please refer to Classic Displays rope light repair instructions



1-800-461-6635
info@classicdisplays.com

www.classicdisplays.com