



THIS PRODUCT MUST BE INSTALLED IN ACCORDANCE WITH THE APPLICABLE INSTALLATION CODE BY A PERSON FAMILIAR WITH THE CONSTRUCTION AND OPERATION OF THE PRODUCT AND THE HAZARDS INVOLVED.

CE PRODUIT ÊTRE INSTALLÉ SELON LE CODE D'INSTALLATION PERTINENT, PAR UNE PERSONNE QUI CONNAÎT BIEN LE PRODUIT ET SON FONCTIONNEMENT AINSI QUE LES RISQUES INHÉRENTS

CAULKING: CONTRACTOR MUST CAULK AROUND ALL HANOVER LANTERN WALLPLATES. DO NOT CAULK THE BOTTOM TO ALLOW DRAINAGE.

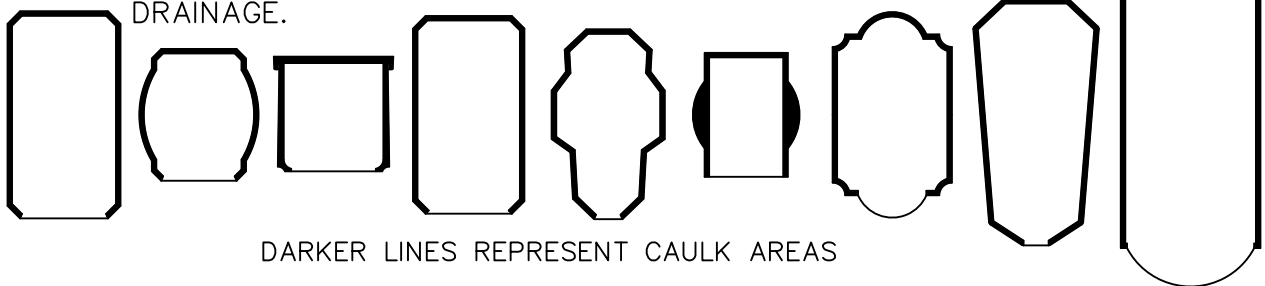



DARKER LINES REPRESENT CAULK AREAS

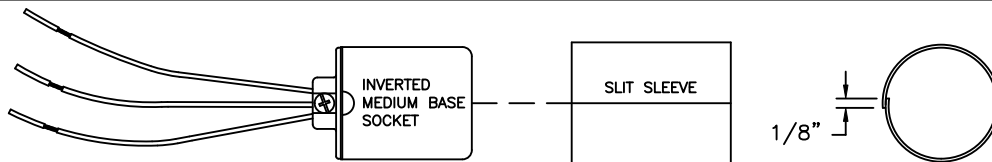

ASSEMBLY INSTRUCTIONS FOR ALL LANTERNS WITH INVERTED MEDIUM BASE SOCKETS AND SLIT SLEEVES.

1. Squeeze slit sleeve by hand so that tension of sleeve grips socket as sleeve slides up onto socket. Overlap lip of sleeve by 1/8" as shown.
2. Turn slit to rear of lantern as sleeve is attached.

PANEL INSTALLATION WITH POLYCARBONATE GLASS CLIPS.



DIRECTIONS: REMOVE SCREWS AND CLIPS FROM PLASTIC BAG, INSERT PANELS (FLAT SIDE OUT), squarely and securely into tabbed areas in the lantern cage. Install clips and screws with screwdriver as shown in illustrations. DO NOT OVER TIGHTEN SCREWS. THIS COULD RESULT IN GLASS BREAKAGE.



ELECTRICAL BOX INSTALLATION.

DIRECTIONS: Install mounting bar with (2) screws at either end of electrical box. Turn threaded nipple into mounting bar. Wire fixture and slide over nipple, then secure with brass cap. Caulking is recommended to keep water out of electrical box in wet location installations.

FIXTURE WIRING.



DIRECTIONS: Wiring fixture to electrical box, black wires connect, white or marked wires connect, and ground wires connect and get grounded to 6" lg. ground loop pigtail.

PANEL INSTALLATION WITH METAL GLASS CLIPS.





DIRECTIONS: Remove screws and clips from plastic bag. Insert panels (flat side out), squarely and securely into tabbed areas in the lantern cage. Install clips and screws with screwdriver as shown in illustrations. DO NOT OVER TIGHTEN SCREWS. THIS COULD RESULT IN GLASS BREAKAGE.

PANEL INSTALLATION WITH POLYCARBONATE RETAINING RING.



DIRECTIONS: Insert panels (flat side out), squarely and securely into tabbed areas provided in the lantern cage. Place retaining ring on lantern cage as shown, (ring fins must be down) to hold panels in place. Secure ring with two screws provided. DO NOT OVER TIGHTEN SCREWS.


HELPFUL HINTS




DIRECTIONS: After removing thumb screws for relamping, place a small amount of petroleum jelly on screw threads. This will permit easy removal at a later date.

*Note: To prevent breakage, tighten thumbscrews by hand only.

BRACKET LANTERN

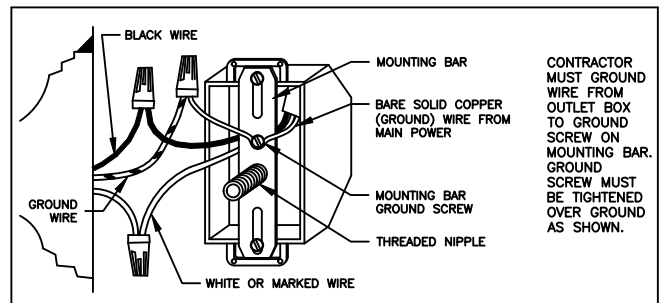

CAULKING

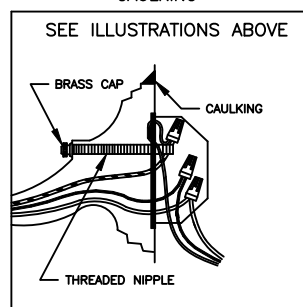

POST TOP LANTERN

