



Aluminum Design Calculations
For
Horizontal Knotwood 1 Inch Wide Battens

Date Prepared... March 17, 2025

Prepared for:

Knotwood USA

5555 W Roosevelt St, Suite 400
Phoenix, AZ 85043

Prepared by:

PVE, LLC

2000 Georgetown Drive, Suite 101
Sewickley, PA 15143
Phone ... (724) 444-1100

TABLE OF CONTENTS

	<u>Page No.</u>
TITLE SHEET.....	1
TABLE OF CONTENTS.....	2
DESIGN CODES AND STANDARDS.....	3
GENERAL NOTES.....	4
DESIGN LOADS.....	5
DESIGN CALCULATIONS.....	6
APPENDIX 'A' (TECHNICAL & PRODUCT DATA SHEETS)	42

DESIGN CODES AND STANDARDS

The following codes and standards, including all specifications referenced within, apply to the design and construction of this project:

- ASCE 7-16, MINIMUM DESIGN LOADS FOR BUILDINGS AND OTHER STRUCTURES
- IBC 2018, INTERNATIONAL BUILDING CODE
- AA ADM-2015, ALUMINUM DESIGN MANUAL
- ANSI/AISC 360-16, SPECIFICATION FOR STRUCTURAL STEEL BUILDINGS
- AISI S100-16, NORTH AMERICAN SPECIFICATION FOR THE DESIGN OF COLD-FORMED STEEL STRUCTURAL MEMBERS
- TMS 402/602-16, BUILDING CODE REQUIREMENTS AND SPECIFICATION FOR MASONRY STRUCTURES
- ACI 318-14, BUILDING CODE REQUIREMENTS FOR STRUCTURAL CONCRETE
- ANSI/AWC NDS-2015, NATIONAL DESIGN SPECIFICATION FOR WOOD CONSTRUCTION

GENERAL NOTES

1. Contractor to verify all dimensions in the field prior to installation. Do not scale off drawings.
2. All members shall be saw cut in field as required.
3. No splices shall be permitted unless indicated otherwise on the drawings.
4. Touch up all scratches with dealer provided colors to match.
5. Welding is not permitted, unless otherwise indicated on the drawings.
6. The contents show the application of aluminum framing components only. The installing contractor is to refer to the project documents for additional requirements.
7. Dimensions herein are for engineering purposes only and must be reviewed for the purpose of approval. All conditions are subject to approval and to field verification prior to fabrication or installation.
8. Before ordering, fabricating or erecting any material, make any necessary surveys and measurements to verify that in place work has been built according to the contract documents and are within acceptable tolerances. This includes the original buildings and all additions thereto. Notify the Architect/Engineer and owner's representatives of any discrepancies prior to construction.
9. Temporary bracing of the system and safety during construction is solely the responsibility of the contractor. Temporary bracing of the system shall remain in place until the system is totally in place. Contractor shall coordinate locations of temporary bracing with other contractors. Refer to drawings for additional criteria.
10. This submittal is subject to the review and approval of the project Architect/Engineer of record prior to installation.

DESIGN LOADS

Design Loads:

The maximum live/wind/snow/seismic loads are determined below based on ASD allowable stresses per the ADM.

1. Dead Loads (Self-Weight Only):

- | | |
|--|--------------------------------------|
| a. 1x6 Batten - KEB15025FWIDE/KEB2525MV2 | $w_{selfB15025W} := 1.67$ <i>plf</i> |
| b. 1x4 Batten - KEB10025FWIDE/KEB2525MV2 | $w_{selfB10025W} := 1.06$ <i>plf</i> |
| c. 1x3 Batten - KEB7525FWIDE/KEB2525MV2 | $w_{selfB7525W} := 0.93$ <i>plf</i> |
| d. 1x2 Batten - KEB5025FWIDE/KEB2525MV2 | $w_{selfB5025W} := 0.58$ <i>plf</i> |

2. Live Loads:

- a. See Calculations Below for Max Allowable Point and Distributed Loads.

3. Wind Loads:

- a. See Calculations Below for Max Allowable Point and Distributed Loads.

4. Snow Loads:

- a. See Calculations Below for Max Allowable Point and Distributed Loads.

5. Seismic Loads:

- a. See Calculations Below for Max Allowable Point and Distributed Loads.

DESIGN CALCULATIONS

Methodology:

When checking Aluminum Components (balustrades, battens, cladding, etc.), the applied loads are compared to allowable tension and shear strengths per the Aluminum Association (AA) Aluminum Design Manual (ADM), American Institute of Steel Construction (AISC) Specification for Structural Steel Buildings (AISC 360), American Iron and Steel Institute (AISI) North American Specification for the Design of Cold-Formed Steel Structural Members (AISI S100), The Masonry Society (TMS) Building Code Requirements and Specification for Masonry Structures (TMS 402/602), American Concrete Institute (ACI) Building Code Requirements for Structural Concrete (ACI 318), & American Wood Council (AWC) National Design Specification for Wood Construction (AWC NDS).

These calculations are not a substitute for any NOA or FBPA required testing for product approval.

Miscellaneous:

The drawings and models shown within the calculation sheets are not meant to be used for fabrication nor performing work. They are for illustrative purposes only to assist in the preparation of the calculations and may not accurately represent the actual work to be performed.

Fastener Requirements:

Self-Tapping Metal Screws - #10 Minimum.
Galvanized Unless Noted Otherwise
Aluminum Where Noted At High/Salt Exposure

Materials Requirements:

Knotwood 25mm Battens:
Aluminum Alloy 6063-T: $F_y = 16 \text{ ksi (MIN)}$ $F_u = 22 \text{ ksi (MIN)}$

Material Allowable Stress:

Per the ADM Tables 2-20:

Bending Stress:

$$F_{ab6063T5} := 9.7 \text{ ksi}$$

Aluminum Modulus of Elasticity:

$$E := 10100 \text{ ksi}$$

Shear Stress:

$$S_{1x6} := \frac{(5.89 - 0.059)}{0.059} = 98.8$$

$$\text{Use: } F_{av1x6} := \frac{38665}{S_{1x6}^2} \text{ ksi} = 4.0 \text{ ksi} \quad (1x6 \text{ Batten})$$

$$S_{1x4} := \frac{(3.89 - 0.059)}{0.059} = 64.9$$

$$\text{Use: } F_{av1x4} := (7.2 - 0.031 \cdot S_{1x4}) \text{ ksi} = 5.2 \text{ ksi} \quad (1x4 \text{ Batten})$$

$$S_{1x3} := \frac{(2.95 - 0.059)}{0.059} = 49.0$$

$$\text{Use: } F_{av1x3} := (7.2 - 0.031 \cdot S_{1x3}) \text{ ksi} = 5.7 \text{ ksi} \quad (1x3 \text{ Batten})$$

$$S_{1x2} := \frac{(1.97 - 0.051)}{0.051} = 37.6$$

$$\text{Use: } F_{av1x2} := 5.8 \text{ ksi} \quad (1x2 \text{ Batten})$$

Material Section Properties:**1x6 Batten KEB15025WIDE:**

$$I_{xB15025W} := 4.5099 \text{ in}^4 \quad (I_x \text{ found per AutoCAD})$$

$$Y_{xB15025W} := 2.95 \text{ in}$$

$$S_{xB15025W} := \frac{I_{xB15025W}}{Y_{xB15025W}} = 1.5 \text{ in}^3$$

$$A_{webB15025Wx} := 25 \text{ mm} \cdot 1.8 \text{ mm} = 0.070 \text{ in}^2$$

$$I_{yB15025W} := 0.2118 \text{ in}^4 \quad (I_{yy} \text{ found per AutoCAD})$$

$$Y_{yB15025W} := 0.53 \text{ in}$$

$$S_{yB15025W} := \frac{I_{yB15025W}}{Y_{yB15025W}} = 0.4 \text{ in}^3$$

$$A_{webB15025Wy} := 150 \text{ mm} \cdot 1.8 \text{ mm} = 0.4 \text{ in}^2$$


$$A_{B15025W} := 1.391 \text{ in}^2$$

$$J_{B15025W} := 0.2118 \text{ in}^4$$

$$r_{xB15025W} := 1.801 \text{ in}$$

$$r_{yB15025W} := 0.3902 \text{ in}$$

All Dimensions are Nominal with
[] Indicating mm

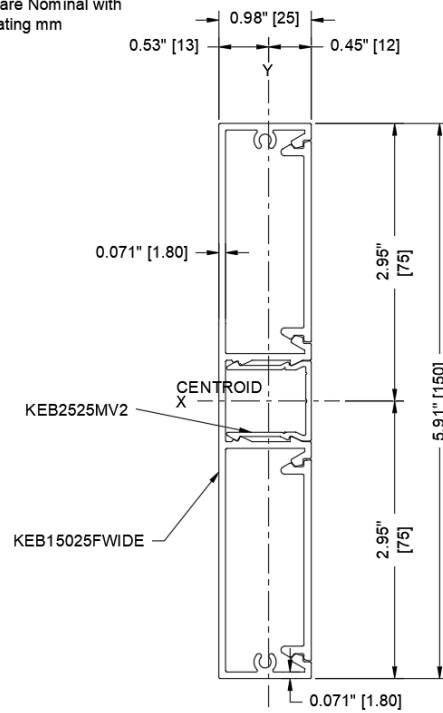**1x4 Batten KEB10025WIDE:**

$$I_{xB10025W} := 1.299 \text{ in}^4 \quad (I_{xx} \text{ found per AutoCAD})$$

$$Y_{xB10025W} := 1.97 \text{ in}$$

$$S_{xB10025W} := \frac{I_{xB10025W}}{Y_{xB10025W}} = 0.659 \text{ in}^3$$

$$A_{webB10025Wx} := 25 \text{ mm} \cdot 1.5 \text{ mm} = 0.058 \text{ in}^2$$

$$I_{yB10025W} := 0.1261 \text{ in}^4 \quad (I_{yy} \text{ found per AutoCAD})$$

$$Y_{yB10025W} := 0.52 \text{ in}$$

$$S_{yB10025W} := \frac{I_{yB10025W}}{Y_{yB10025W}} = 0.243 \text{ in}^3$$

$$A_{webB10025Wy} := 100 \text{ mm} \cdot 1.5 \text{ mm} = 0.233 \text{ in}^2$$


$$A_{B10025W} := 0.8837 \text{ in}^2$$

$$J_{B10025W} := 0.1261 \text{ in}^4$$

$$r_{xB10025W} := 1.212 \text{ in}$$

$$r_{yB10025W} := 0.378 \text{ in}$$

All Dimensions are Nominal with
[] Indicating mm

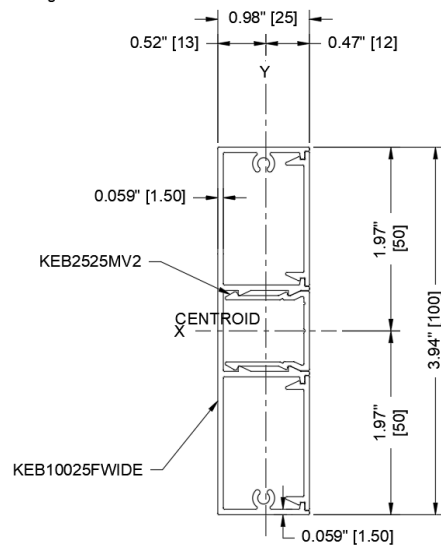

1x3 Batten KEB7525WIDE:

$$I_{xB7525W} := 0.6622 \text{ in}^4 \quad (\text{I}_x \text{ found per AutoCAD})$$

$$Y_{xB7525W} := 1.48 \text{ in}$$

$$S_{xB7525W} := \frac{I_{xB7525W}}{Y_{xB7525W}} = 0.447 \text{ in}^3$$

$$A_{webB7525Wx} := 25 \text{ mm} \cdot 1.5 \text{ mm} = 0.058 \text{ in}^2$$

$$I_{yB7525W} := 0.1019 \text{ in}^4 \quad (\text{I}_{yy} \text{ found per AutoCAD})$$

$$Y_{yB7525W} := 0.52 \text{ in}$$

$$S_{yB7525W} := \frac{I_{yB7525W}}{Y_{yB7525W}} = 0.196 \text{ in}^3$$

$$A_{webB7525Wy} := 25 \text{ mm} \cdot 1.5 \text{ mm} = 0.058 \text{ in}^2$$


$$A_{B7525W} := 0.7748 \text{ in}^2$$

$$J_{B7525W} := 0.1019 \text{ in}^4$$

$$r_{xB7525W} := 0.9245 \text{ in}$$

$$r_{yB7525W} := 0.3627 \text{ in}$$

All Dimensions are Nominal with
[] Indicating mm

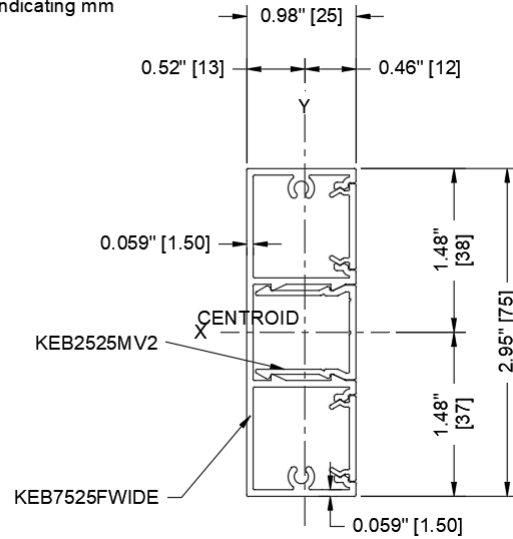

1x2 Batten KEB5025WIDE:

$$I_{xB5025W} := 0.1905 \text{ in}^4 \quad (\text{I}_{xx} \text{ found per AutoCAD})$$

$$Y_{xB5025W} := 0.98 \text{ in}$$

$$S_{xB5025W} := \frac{I_{xB5025W}}{Y_{xB5025W}} = 0.194 \text{ in}^3$$

$$A_{webB5025Wx} := 25 \text{ mm} \cdot 1.5 \text{ mm} = 0.058 \text{ in}^2$$

$$I_{yB5025W} := 0.0679 \text{ in}^4 \quad (\text{I}_{yy} \text{ found per AutoCAD})$$

$$Y_{yB5025W} := 0.49 \text{ in} = 0.5 \text{ in}$$

$$S_{yB5025W} := \frac{I_{yB5025W}}{Y_{yB5025W}} = 0.139 \text{ in}^3$$

$$A_{webB5025Wy} := 50 \text{ mm} \cdot 1.5 \text{ mm} = 0.116 \text{ in}^2$$


$$A_{B5025W} := 0.480 \text{ in}^2$$

$$J_{B5025W} := 0.0679 \text{ in}^4$$

$$r_{xB5025W} := 0.6299 \text{ in}$$

$$r_{yB5025W} := 0.3762 \text{ in}$$

All Dimensions are Nominal with
[] Indicating mm

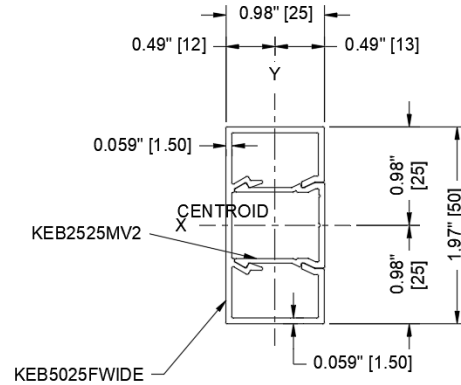

Check 1x2WIDE Batten (KEB5025FWIDE/KEB2525MV2 - 6063-T5) - Strong Axis:

$$d_b := 50 \text{ mm} = 2.0 \text{ in} \quad \text{Depth of Member} \quad s_b := 25 \text{ mm} = 1.0 \text{ in} \quad \text{Width of Member}$$

$$w_{DL} := w_{selfB5025W} = 0.58 \text{ plf} \quad \text{Self Weight of Member} \quad I_x := I_{xB5025W} = 0.191 \text{ in}^4$$

Max allowable moments and shear considering batten simply supported between 2 supports. Note, dead load does not cause bending in this orientation.

Maximum Allowable Batten Moment:

Strong axis bending:

$$F_{ab6063T5} = 9.7 \text{ ksi}$$

Max Allowable Bending Stress per ADM

$$M_{MaxSA} := F_{ab6063T5} \cdot S_{xB5025W} = 1.89 \text{ kip} \cdot \text{in}$$

Max Moment Allowed for Batten - Strong Axis Bending

Maximum Allowable Batten Shear:

$$F_{av1x2} = 5.8 \text{ ksi}$$

Max Allowable Shear Stress per ADM

$$V_{MaxSA} := F_{av1x2} \cdot 2 \cdot A_{webB5025Wy} = 1.35 \text{ kip}$$

Max Shear Allowed for Batten - Strong Axis

Maximum Allowable Design Pressures For Different Spans:

Maximum Allowable Loads for Simply Supported Battens:

Max Distributed Load Strong Axis:**Max Point Loads Strong Axis:**

$$w_{1ft} := \min \left(\frac{M_{MaxSA} \cdot 8}{(1 \text{ ft})^2}, \frac{2 \cdot V_{MaxSA}}{1 \text{ ft}} \right) - w_{DL} = 1256.5 \text{ plf} \quad P_{Max1ft} := \min \left(\frac{\left(M_{MaxSA} - \frac{w_{DL} \cdot (1 \text{ ft})^2}{8} \right) \cdot 4}{1 \text{ ft}}, V_{MaxSA} \right) = 628 \text{ lbf}$$

$$w_{2ft} := \min \left(\frac{M_{MaxSA} \cdot 8}{(2 \text{ ft})^2}, \frac{2 \cdot V_{MaxSA}}{2 \text{ ft}} \right) - w_{DL} = 313.7 \text{ plf} \quad P_{Max2ft} := \min \left(\frac{\left(M_{MaxSA} - \frac{w_{DL} \cdot (2 \text{ ft})^2}{8} \right) \cdot 4}{2 \text{ ft}}, V_{MaxSA} \right) = 314 \text{ lbf}$$

$$w_{3ft} := \min \left(\frac{M_{MaxSA} \cdot 8}{(3 \text{ ft})^2}, \frac{2 \cdot V_{MaxSA}}{3 \text{ ft}} \right) - w_{DL} = 139.1 \text{ plf} \quad P_{Max3ft} := \min \left(\frac{\left(M_{MaxSA} - \frac{w_{DL} \cdot (3 \text{ ft})^2}{8} \right) \cdot 4}{3 \text{ ft}}, V_{MaxSA} \right) = 209 \text{ lbf}$$

$$w_{4ft} := \min \left(\frac{M_{MaxSA} \cdot 8}{(4 \text{ ft})^2}, \frac{2 \cdot V_{MaxSA}}{4 \text{ ft}} \right) - w_{DL} = 78.0 \text{ plf} \quad P_{Max4ft} := \min \left(\frac{\left(M_{MaxSA} - \frac{w_{DL} \cdot (4 \text{ ft})^2}{8} \right) \cdot 4}{4 \text{ ft}}, V_{MaxSA} \right) = 156 \text{ lbf}$$

$$w_{5ft} := \min \left(\frac{M_{MaxSA} \cdot 8}{(5 \text{ ft})^2}, \frac{2 \cdot V_{MaxSA}}{5 \text{ ft}} \right) - w_{DL} = 49.7 \text{ plf} \quad P_{Max5ft} := \min \left(\frac{\left(M_{MaxSA} - \frac{w_{DL} \cdot (5 \text{ ft})^2}{8} \right) \cdot 4}{5 \text{ ft}}, V_{MaxSA} \right) = 124 \text{ lbf}$$

$$w_{6ft} := \min \left(\frac{M_{MaxSA} \cdot 8}{(6 \text{ ft})^2}, \frac{2 \cdot V_{MaxSA}}{6 \text{ ft}} \right) - w_{DL} = 34.3 \text{ plf} \quad P_{Max6ft} := \min \left(\frac{\left(M_{MaxSA} - \frac{w_{DL} \cdot (6 \text{ ft})^2}{8} \right) \cdot 4}{6 \text{ ft}}, V_{MaxSA} \right) = 103 \text{ lbf}$$

$$w_{7ft} := \min \left(\frac{M_{MaxSA} \cdot 8}{(7 \text{ ft})^2}, \frac{2 \cdot V_{MaxSA}}{7 \text{ ft}} \right) - w_{DL} = 25.1 \text{ plf} \quad P_{Max7ft} := \min \left(\frac{\left(M_{MaxSA} - \frac{w_{DL} \cdot (7 \text{ ft})^2}{8} \right) \cdot 4}{7 \text{ ft}}, V_{MaxSA} \right) = 88 \text{ lbf}$$

$$w_{8ft} := \min\left(\frac{M_{MaxSA} \cdot 8}{(8 \text{ ft})^2}, \frac{2 \cdot V_{MaxSA}}{8 \text{ ft}}\right) - w_{DL} = 19.1 \text{ plf} \quad P_{Max8ft} := \min\left(\frac{\left(M_{MaxSA} - \frac{w_{DL} \cdot (8 \text{ ft})^2}{8}\right) \cdot 4}{8 \text{ ft}}, V_{MaxSA}\right) = 76 \text{ lbf}$$

$$w_{9ft} := \min\left(\frac{M_{MaxSA} \cdot 8}{(9 \text{ ft})^2}, \frac{2 \cdot V_{MaxSA}}{9 \text{ ft}}\right) - w_{DL} = 14.9 \text{ plf} \quad P_{Max9ft} := \min\left(\frac{\left(M_{MaxSA} - \frac{w_{DL} \cdot (9 \text{ ft})^2}{8}\right) \cdot 4}{9 \text{ ft}}, V_{MaxSA}\right) = 67 \text{ lbf}$$

$$w_{10ft} := \min\left(\frac{M_{MaxSA} \cdot 8}{(10 \text{ ft})^2}, \frac{2 \cdot V_{MaxSA}}{10 \text{ ft}}\right) - w_{DL} = 12.0 \text{ plf} \quad P_{Max10ft} := \min\left(\frac{\left(M_{MaxSA} - \frac{w_{DL} \cdot (10 \text{ ft})^2}{8}\right) \cdot 4}{10 \text{ ft}}, V_{MaxSA}\right) = 60 \text{ lbf}$$

Max Distributed Load For Deflection - Strong Axis:

$$w_{1ft\Delta} := \frac{\frac{1 \text{ ft}}{60} \cdot 384 \cdot E \cdot I_x}{5 \cdot (1 \text{ ft})^4} = 17102.7 \text{ plf}$$

$$w_{2ft\Delta} := \frac{\frac{2 \text{ ft}}{60} \cdot 384 \cdot E \cdot I_x}{5 \cdot (2 \text{ ft})^4} = 2137.8 \text{ plf}$$

$$w_{3ft\Delta} := \frac{\frac{3 \text{ ft}}{60} \cdot 384 \cdot E \cdot I_x}{5 \cdot (3 \text{ ft})^4} = 633.4 \text{ plf}$$

$$w_{4ft\Delta} := \frac{\frac{4 \text{ ft}}{60} \cdot 384 \cdot E \cdot I_x}{5 \cdot (4 \text{ ft})^4} = 267.2 \text{ plf}$$

$$w_{5ft\Delta} := \frac{\frac{5 \text{ ft}}{60} \cdot 384 \cdot E \cdot I_x}{5 \cdot (5 \text{ ft})^4} = 136.8 \text{ plf}$$

$$w_{6ft\Delta} := \frac{\frac{6 \text{ ft}}{60} \cdot 384 \cdot E \cdot I_x}{5 \cdot (6 \text{ ft})^4} = 79.2 \text{ plf}$$

$$w_{7ft\Delta} := \frac{\frac{7 \text{ ft}}{60} \cdot 384 \cdot E \cdot I_x}{5 \cdot (7 \text{ ft})^4} = 49.9 \text{ plf}$$

$$w_{8ft\Delta} := \frac{\frac{8 \text{ ft}}{60} \cdot 384 \cdot E \cdot I_x}{5 \cdot (8 \text{ ft})^4} = 33.4 \text{ plf}$$

$$w_{9ft\Delta} := \frac{\frac{9 \text{ ft}}{60} \cdot 384 \cdot E \cdot I_x}{5 \cdot (9 \text{ ft})^4} = 23.5 \text{ plf}$$

$$w_{10ft\Delta} := \frac{\frac{10 \text{ ft}}{60} \cdot 384 \cdot E \cdot I_x}{5 \cdot (10 \text{ ft})^4} = 17.1 \text{ plf}$$

Max Point Load For Deflection - Strong Axis:

$$P_{Max1ft\Delta} := \frac{\frac{1 \text{ ft}}{60} \cdot 48 \cdot E \cdot I_x}{(1 \text{ ft})^3} = 10689.2 \text{ lbf}$$

$$P_{Max2ft\Delta} := \frac{\frac{2 \text{ ft}}{60} \cdot 48 \cdot E \cdot I_x}{(2 \text{ ft})^3} = 2672.3 \text{ lbf}$$

$$P_{Max3ft\Delta} := \frac{\frac{3 \text{ ft}}{60} \cdot 48 \cdot E \cdot I_x}{(3 \text{ ft})^3} = 1187.7 \text{ lbf}$$

$$P_{Max4ft\Delta} := \frac{\frac{4 \text{ ft}}{60} \cdot 48 \cdot E \cdot I_x}{(4 \text{ ft})^3} = 668.1 \text{ lbf}$$

$$P_{Max5ft\Delta} := \frac{\frac{5 \text{ ft}}{60} \cdot 48 \cdot E \cdot I_x}{(5 \text{ ft})^3} = 427.6 \text{ lbf}$$

$$P_{Max6ft\Delta} := \frac{\frac{6 \text{ ft}}{60} \cdot 48 \cdot E \cdot I_x}{(6 \text{ ft})^3} = 296.9 \text{ lbf}$$

$$P_{Max7ft\Delta} := \frac{\frac{7 \text{ ft}}{60} \cdot 48 \cdot E \cdot I_x}{(7 \text{ ft})^3} = 218.1 \text{ lbf}$$

$$P_{Max8ft\Delta} := \frac{\frac{8 \text{ ft}}{60} \cdot 48 \cdot E \cdot I_x}{(8 \text{ ft})^3} = 167.0 \text{ lbf}$$

$$P_{Max9ft\Delta} := \frac{\frac{9 \text{ ft}}{60} \cdot 48 \cdot E \cdot I_x}{(9 \text{ ft})^3} = 132.0 \text{ lbf}$$

$$P_{Max10ft\Delta} := \frac{\frac{10 \text{ ft}}{60} \cdot 48 \cdot E \cdot I_x}{(10 \text{ ft})^3} = 106.9 \text{ lbf}$$

Maximum Allowable Design Pressures For Cantilevered Battens:

Maximum Allowable Loads for Cantilevered Battens:

Max Distributed Load Strong Axis:

$$w_{1ftC} := \min\left(\frac{M_{MaxSA} \cdot 2}{(1 \text{ ft})^2}, \frac{V_{MaxSA}}{1 \text{ ft}}\right) - w_{DL} = 313.7 \text{ plf}$$

$$w_{2ftC} := \min\left(\frac{M_{MaxSA} \cdot 2}{(2 \text{ ft})^2}, \frac{V_{MaxSA}}{2 \text{ ft}}\right) - w_{DL} = 78.0 \text{ plf}$$

$$w_{3ftC} := \min\left(\frac{M_{MaxSA} \cdot 2}{(3 \text{ ft})^2}, \frac{V_{MaxSA}}{3 \text{ ft}}\right) - w_{DL} = 34.3 \text{ plf}$$

$$w_{4ftC} := \min\left(\frac{M_{MaxSA} \cdot 2}{(4 \text{ ft})^2}, \frac{V_{MaxSA}}{4 \text{ ft}}\right) - w_{DL} = 19.1 \text{ plf}$$

$$w_{5ftC} := \min\left(\frac{M_{MaxSA} \cdot 2}{(5 \text{ ft})^2}, \frac{V_{MaxSA}}{5 \text{ ft}}\right) - w_{DL} = 12.0 \text{ plf}$$

$$w_{6ftC} := \min\left(\frac{M_{MaxSA} \cdot 2}{(6 \text{ ft})^2}, \frac{V_{MaxSA}}{6 \text{ ft}}\right) - w_{DL} = 8.1 \text{ plf}$$

$$w_{7ftC} := \min\left(\frac{M_{MaxSA} \cdot 2}{(7 \text{ ft})^2}, \frac{V_{MaxSA}}{7 \text{ ft}}\right) - w_{DL} = 5.8 \text{ plf}$$

Max Point Loads Strong Axis:

$$P_{Max1ftC} := \min\left(\frac{M_{MaxSA}}{1 \text{ ft}}, V_{MaxSA}\right) - w_{DL} \cdot 1 \text{ ft} = 157 \text{ lbf}$$

$$P_{Max2ftC} := \min\left(\frac{M_{MaxSA}}{2 \text{ ft}}, V_{MaxSA}\right) - w_{DL} \cdot 2 \text{ ft} = 77 \text{ lbf}$$

$$P_{Max3ftC} := \min\left(\frac{M_{MaxSA}}{3 \text{ ft}}, V_{MaxSA}\right) - w_{DL} \cdot 3 \text{ ft} = 51 \text{ lbf}$$

$$P_{Max4ftC} := \min\left(\frac{M_{MaxSA}}{4 \text{ ft}}, V_{MaxSA}\right) - w_{DL} \cdot 4 \text{ ft} = 37 \text{ lbf}$$

$$P_{Max5ftC} := \min\left(\frac{M_{MaxSA}}{5 \text{ ft}}, V_{MaxSA}\right) - w_{DL} \cdot 5 \text{ ft} = 29 \text{ lbf}$$

$$P_{Max6ftC} := \min\left(\frac{M_{MaxSA}}{6 \text{ ft}}, V_{MaxSA}\right) - w_{DL} \cdot 6 \text{ ft} = 23 \text{ lbf}$$

$$P_{Max7ftC} := \min\left(\frac{M_{MaxSA}}{7 \text{ ft}}, V_{MaxSA}\right) - w_{DL} \cdot 7 \text{ ft} = 18 \text{ lbf}$$

Max Distributed Load For Deflection - Strong Axis:

$$w_{1ftCD} := \frac{\frac{2 \cdot 1 \text{ ft}}{60} \cdot 8 \cdot E \cdot I_x}{(1 \text{ ft})^4} = 3563.1 \text{ plf}$$

$$w_{2ftCD} := \frac{\frac{2 \cdot 2 \text{ ft}}{60} \cdot 8 \cdot E \cdot I_x}{(2 \text{ ft})^4} = 445.4 \text{ plf}$$

$$w_{3ftCD} := \frac{\frac{2 \cdot 3 \text{ ft}}{60} \cdot 8 \cdot E \cdot I_x}{(3 \text{ ft})^4} = 132.0 \text{ plf}$$

$$w_{4ftCD} := \frac{\frac{2 \cdot 4 \text{ ft}}{60} \cdot 8 \cdot E \cdot I_x}{(4 \text{ ft})^4} = 55.7 \text{ plf}$$

$$w_{5ftCD} := \frac{\frac{2 \cdot 5 \text{ ft}}{60} \cdot 8 \cdot E \cdot I_x}{(5 \text{ ft})^4} = 28.5 \text{ plf}$$

$$w_{6ftCD} := \frac{\frac{2 \cdot 6 \text{ ft}}{60} \cdot 8 \cdot E \cdot I_x}{(6 \text{ ft})^4} = 16.5 \text{ plf}$$

$$w_{7ftCD} := \frac{\frac{2 \cdot 7 \text{ ft}}{60} \cdot 8 \cdot E \cdot I_x}{(7 \text{ ft})^4} = 10.4 \text{ plf}$$

Max Point Load For Deflection - Strong Axis:

$$P_{Max1ftCD} := \frac{\frac{2 \cdot 1 \text{ ft}}{60} \cdot 3 \cdot E \cdot I_x}{(1 \text{ ft})^3} = 1336.1 \text{ lbf}$$

$$P_{Max2ftCD} := \frac{\frac{2 \cdot 2 \text{ ft}}{60} \cdot 3 \cdot E \cdot I_x}{(2 \text{ ft})^3} = 334.0 \text{ lbf}$$

$$P_{Max3ftCD} := \frac{\frac{2 \cdot 3 \text{ ft}}{60} \cdot 3 \cdot E \cdot I_x}{(3 \text{ ft})^3} = 148.5 \text{ lbf}$$

$$P_{Max4ftCD} := \frac{\frac{2 \cdot 4 \text{ ft}}{60} \cdot 3 \cdot E \cdot I_x}{(4 \text{ ft})^3} = 83.5 \text{ lbf}$$

$$P_{Max5ftCD} := \frac{\frac{2 \cdot 5 \text{ ft}}{60} \cdot 3 \cdot E \cdot I_x}{(5 \text{ ft})^3} = 53.4 \text{ lbf}$$

$$P_{Max6ftCD} := \frac{\frac{2 \cdot 6 \text{ ft}}{60} \cdot 3 \cdot E \cdot I_x}{(6 \text{ ft})^3} = 37.1 \text{ lbf}$$

$$P_{Max7ftCD} := \frac{\frac{2 \cdot 7 \text{ ft}}{60} \cdot 3 \cdot E \cdot I_x}{(7 \text{ ft})^3} = 27.3 \text{ lbf}$$

Span Table Summary - Strong Axis 1x2WIDE:

	Span	Max Distributed (plf)	Max Point	
SA1x2:=	1 ft	$\frac{\min(w_{1ft}, w_{1ft\Delta})}{plf}$	$\min(P_{Max1ft}, P_{Max1ft\Delta})$	=
	2 ft	$\frac{\min(w_{2ft}, w_{2ft\Delta})}{plf}$	$\min(P_{Max2ft}, P_{Max2ft\Delta})$	
	3 ft	$\frac{\min(w_{3ft}, w_{3ft\Delta})}{plf}$	$\min(P_{Max3ft}, P_{Max3ft\Delta})$	
	4 ft	$\frac{\min(w_{4ft}, w_{4ft\Delta})}{plf}$	$\min(P_{Max4ft}, P_{Max4ft\Delta})$	
	5 ft	$\frac{\min(w_{5ft}, w_{5ft\Delta})}{plf}$	$\min(P_{Max5ft}, P_{Max5ft\Delta})$	
	6 ft	$\frac{\min(w_{6ft}, w_{6ft\Delta})}{plf}$	$\min(P_{Max6ft}, P_{Max6ft\Delta})$	
	7 ft	$\frac{\min(w_{7ft}, w_{7ft\Delta})}{plf}$	$\min(P_{Max7ft}, P_{Max7ft\Delta})$	
	8 ft	$\frac{\min(w_{8ft}, w_{8ft\Delta})}{plf}$	$\min(P_{Max8ft}, P_{Max8ft\Delta})$	
	9 ft	$\frac{\min(w_{9ft}, w_{9ft\Delta})}{plf}$	$\min(P_{Max9ft}, P_{Max9ft\Delta})$	
	10 ft	$\frac{\min(w_{10ft}, w_{10ft\Delta})}{plf}$	$\min(P_{Max10ft}, P_{Max10ft\Delta})$	
				$\begin{bmatrix} 1.0 \text{ ft} & 1256.5 & 628.2 \text{ lbf} \\ 2.0 \text{ ft} & 313.7 & 313.7 \text{ lbf} \\ 3.0 \text{ ft} & 139.1 & 208.6 \text{ lbf} \\ 4.0 \text{ ft} & 78.0 & 156.0 \text{ lbf} \\ 5.0 \text{ ft} & 49.7 & 124.3 \text{ lbf} \\ 6.0 \text{ ft} & 34.3 & 103.0 \text{ lbf} \\ 7.0 \text{ ft} & 25.1 & 87.8 \text{ lbf} \\ 8.0 \text{ ft} & 19.1 & 76.2 \text{ lbf} \\ 9.0 \text{ ft} & 14.9 & 67.2 \text{ lbf} \\ 10.0 \text{ ft} & 12.0 & 60.0 \text{ lbf} \end{bmatrix}$

	Span	Max Distributed (plf)	Max Point	
SA1x2C:=	1 ft	$\frac{\min(w_{1ftC}, w_{1ftC\Delta})}{plf}$	$\min(P_{Max1ftC}, P_{Max1ftC\Delta})$	=
	2 ft	$\frac{\min(w_{2ftC}, w_{2ftC\Delta})}{plf}$	$\min(P_{Max2ftC}, P_{Max2ftC\Delta})$	
	3 ft	$\frac{\min(w_{3ftC}, w_{3ftC\Delta})}{plf}$	$\min(P_{Max3ftC}, P_{Max3ftC\Delta})$	
	4 ft	$\frac{\min(w_{4ftC}, w_{4ftC\Delta})}{plf}$	$\min(P_{Max4ftC}, P_{Max4ftC\Delta})$	
	5 ft	$\frac{\min(w_{5ftC}, w_{5ftC\Delta})}{plf}$	$\min(P_{Max5ftC}, P_{Max5ftC\Delta})$	
	6 ft	$\frac{\min(w_{6ftC}, w_{6ftC\Delta})}{plf}$	$\min(P_{Max6ftC}, P_{Max6ftC\Delta})$	
	7 ft	$\frac{\min(w_{7ftC}, w_{7ftC\Delta})}{plf}$	$\min(P_{Max7ftC}, P_{Max7ftC\Delta})$	
				$\begin{bmatrix} 1.0 \text{ ft} & 313.7 & 156.6 \text{ lbf} \\ 2.0 \text{ ft} & 78.0 & 77.4 \text{ lbf} \\ 3.0 \text{ ft} & 34.3 & 50.6 \text{ lbf} \\ 4.0 \text{ ft} & 19.1 & 37.0 \text{ lbf} \\ 5.0 \text{ ft} & 12.0 & 28.5 \text{ lbf} \\ 6.0 \text{ ft} & 8.1 & 22.7 \text{ lbf} \\ 7.0 \text{ ft} & 5.8 & 18.4 \text{ lbf} \end{bmatrix}$

Check 1x2WIDE Batten (KEB5025FWIDE/KEB2525MV2 - 6063-T5) - Weak Axis:

$$d_b := 50 \text{ mm} = 2.0 \text{ in} \quad \text{Depth of Member} \quad s_b := 25 \text{ mm} = 1.0 \text{ in} \quad \text{Width of Member}$$

$$w_{DL} := w_{selfB5025W} = 0.58 \text{ plf} \quad \text{Self Weight of Member} \quad I_y := I_{yB5025W} = 0.068 \text{ in}^4$$

Max allowable moments and shear considering batten simply supported between 2 supports. Note, dead load does not cause bending in this orientation.

Maximum Allowable Batten Moment:

Strong axis bending:

$$F_{ab6063T5} = 9.7 \text{ ksi}$$

Max Allowable Bending Stress per ADM

$$M_{MaxWA} := F_{ab6063T5} \cdot S_{yB5025W} = 1.34 \text{ kip} \cdot \text{in}$$

Max Moment Allowed for Batten - Weak Axis Bending

Maximum Allowable Batten Shear:

$$F_{av1x2} = 5.8 \text{ ksi}$$

Max Allowable Shear Stress per ADM

$$V_{MaxWA} := F_{av1x2} \cdot 2 \cdot A_{webB5025Wx} = 0.67 \text{ kip}$$

Max Shear Allowed for Batten - Weak Axis

Maximum Allowable Design Pressures For Different Spans:

Maximum Allowable Loads for Simply Supported Battens:

Max Distributed Load Weak Axis:

Max Point Loads Weak Axis:

$$w_{1ft} := \min \left(\frac{M_{MaxWA} \cdot 8}{(1 \text{ ft})^2}, \frac{2 \cdot V_{MaxWA}}{1 \text{ ft}} \right) - w_{DL} = 895.5 \text{ plf} \quad P_{Max1ft} := \min \left(\frac{\left(M_{MaxWA} - \frac{w_{DL} \cdot (1 \text{ ft})^2}{8} \right) \cdot 4}{1 \text{ ft}}, V_{MaxWA} \right) = 448 \text{ lbf}$$

$$w_{2ft} := \min \left(\frac{M_{MaxWA} \cdot 8}{(2 \text{ ft})^2}, \frac{2 \cdot V_{MaxWA}}{2 \text{ ft}} \right) - w_{DL} = 223.4 \text{ plf} \quad P_{Max2ft} := \min \left(\frac{\left(M_{MaxWA} - \frac{w_{DL} \cdot (2 \text{ ft})^2}{8} \right) \cdot 4}{2 \text{ ft}}, V_{MaxWA} \right) = 223 \text{ lbf}$$

$$w_{3ft} := \min \left(\frac{M_{MaxWA} \cdot 8}{(3 \text{ ft})^2}, \frac{2 \cdot V_{MaxWA}}{3 \text{ ft}} \right) - w_{DL} = 99.0 \text{ plf} \quad P_{Max3ft} := \min \left(\frac{\left(M_{MaxWA} - \frac{w_{DL} \cdot (3 \text{ ft})^2}{8} \right) \cdot 4}{3 \text{ ft}}, V_{MaxWA} \right) = 148 \text{ lbf}$$

$$w_{4ft} := \min \left(\frac{M_{MaxWA} \cdot 8}{(4 \text{ ft})^2}, \frac{2 \cdot V_{MaxWA}}{4 \text{ ft}} \right) - w_{DL} = 55.4 \text{ plf} \quad P_{Max4ft} := \min \left(\frac{\left(M_{MaxWA} - \frac{w_{DL} \cdot (4 \text{ ft})^2}{8} \right) \cdot 4}{4 \text{ ft}}, V_{MaxWA} \right) = 111 \text{ lbf}$$

$$w_{5ft} := \min \left(\frac{M_{MaxWA} \cdot 8}{(5 \text{ ft})^2}, \frac{2 \cdot V_{MaxWA}}{5 \text{ ft}} \right) - w_{DL} = 35.3 \text{ plf} \quad P_{Max5ft} := \min \left(\frac{\left(M_{MaxWA} - \frac{w_{DL} \cdot (5 \text{ ft})^2}{8} \right) \cdot 4}{5 \text{ ft}}, V_{MaxWA} \right) = 88 \text{ lbf}$$

$$w_{6ft} := \min \left(\frac{M_{MaxWA} \cdot 8}{(6 \text{ ft})^2}, \frac{2 \cdot V_{MaxWA}}{6 \text{ ft}} \right) - w_{DL} = 24.3 \text{ plf} \quad P_{Max6ft} := \min \left(\frac{\left(M_{MaxWA} - \frac{w_{DL} \cdot (6 \text{ ft})^2}{8} \right) \cdot 4}{6 \text{ ft}}, V_{MaxWA} \right) = 73 \text{ lbf}$$

$$w_{7ft} := \min \left(\frac{M_{MaxWA} \cdot 8}{(7 \text{ ft})^2}, \frac{2 \cdot V_{MaxWA}}{7 \text{ ft}} \right) - w_{DL} = 17.7 \text{ plf} \quad P_{Max7ft} := \min \left(\frac{\left(M_{MaxWA} - \frac{w_{DL} \cdot (7 \text{ ft})^2}{8} \right) \cdot 4}{7 \text{ ft}}, V_{MaxWA} \right) = 62 \text{ lbf}$$

$$w_{8ft} := \min \left(\frac{M_{MaxWA} \cdot 8}{(8 \text{ ft})^2}, \frac{2 \cdot V_{MaxWA}}{8 \text{ ft}} \right) - w_{DL} = 13.4 \text{ plf} \quad P_{Max8ft} := \min \left(\frac{\left(M_{MaxWA} - \frac{w_{DL} \cdot (8 \text{ ft})^2}{8} \right) \cdot 4}{8 \text{ ft}}, V_{MaxWA} \right) = 54 \text{ lbf}$$

$$w_{9ft} := \min \left(\frac{M_{MaxWA} \cdot 8}{(9 \text{ ft})^2}, \frac{2 \cdot V_{MaxWA}}{9 \text{ ft}} \right) - w_{DL} = 10.5 \text{ plf} \quad P_{Max9ft} := \min \left(\frac{\left(M_{MaxWA} - \frac{w_{DL} \cdot (9 \text{ ft})^2}{8} \right) \cdot 4}{9 \text{ ft}}, V_{MaxWA} \right) = 47 \text{ lbf}$$

$$w_{10ft} := \min \left(\frac{M_{MaxWA} \cdot 8}{(10 \text{ ft})^2}, \frac{2 \cdot V_{MaxWA}}{10 \text{ ft}} \right) - w_{DL} = 8.4 \text{ plf} \quad P_{Max10ft} := \min \left(\frac{\left(M_{MaxWA} - \frac{w_{DL} \cdot (10 \text{ ft})^2}{8} \right) \cdot 4}{10 \text{ ft}}, V_{MaxWA} \right) = 42 \text{ lbf}$$

Max Distributed Load For Deflection - Weak Axis:

$$w_{1ft\Delta} := \frac{\frac{1 \text{ ft}}{60} \cdot 384 \cdot E \cdot I_y}{5 \cdot (1 \text{ ft})^4} = 6095.9 \text{ plf}$$

$$w_{2ft\Delta} := \frac{\frac{2 \text{ ft}}{60} \cdot 384 \cdot E \cdot I_y}{5 \cdot (2 \text{ ft})^4} = 762.0 \text{ plf}$$

$$w_{3ft\Delta} := \frac{\frac{3 \text{ ft}}{60} \cdot 384 \cdot E \cdot I_y}{5 \cdot (3 \text{ ft})^4} = 225.8 \text{ plf}$$

$$w_{4ft\Delta} := \frac{\frac{4 \text{ ft}}{60} \cdot 384 \cdot E \cdot I_y}{5 \cdot (4 \text{ ft})^4} = 95.2 \text{ plf}$$

$$w_{5ft\Delta} := \frac{\frac{5 \text{ ft}}{60} \cdot 384 \cdot E \cdot I_y}{5 \cdot (5 \text{ ft})^4} = 48.8 \text{ plf}$$

$$w_{6ft\Delta} := \frac{\frac{6 \text{ ft}}{60} \cdot 384 \cdot E \cdot I_y}{5 \cdot (6 \text{ ft})^4} = 28.2 \text{ plf}$$

$$w_{7ft\Delta} := \frac{\frac{7 \text{ ft}}{60} \cdot 384 \cdot E \cdot I_y}{5 \cdot (7 \text{ ft})^4} = 17.8 \text{ plf}$$

$$w_{8ft\Delta} := \frac{\frac{8 \text{ ft}}{60} \cdot 384 \cdot E \cdot I_y}{5 \cdot (8 \text{ ft})^4} = 11.9 \text{ plf}$$

$$w_{9ft\Delta} := \frac{\frac{9 \text{ ft}}{60} \cdot 384 \cdot E \cdot I_y}{5 \cdot (9 \text{ ft})^4} = 8.4 \text{ plf}$$

$$w_{10ft\Delta} := \frac{\frac{10 \text{ ft}}{60} \cdot 384 \cdot E \cdot I_y}{5 \cdot (10 \text{ ft})^4} = 6.1 \text{ plf}$$

Max Point Load For Deflection - Weak Axis:

$$P_{Max1ft\Delta} := \frac{\frac{1 \text{ ft}}{60} \cdot 48 \cdot E \cdot I_y}{(1 \text{ ft})^3} = 3809.9 \text{ lbf}$$

$$P_{Max2ft\Delta} := \frac{\frac{2 \text{ ft}}{60} \cdot 48 \cdot E \cdot I_y}{(2 \text{ ft})^3} = 952.5 \text{ lbf}$$

$$P_{Max3ft\Delta} := \frac{\frac{3 \text{ ft}}{60} \cdot 48 \cdot E \cdot I_y}{(3 \text{ ft})^3} = 423.3 \text{ lbf}$$

$$P_{Max4ft\Delta} := \frac{\frac{4 \text{ ft}}{60} \cdot 48 \cdot E \cdot I_y}{(4 \text{ ft})^3} = 238.1 \text{ lbf}$$

$$P_{Max5ft\Delta} := \frac{\frac{5 \text{ ft}}{60} \cdot 48 \cdot E \cdot I_y}{(5 \text{ ft})^3} = 152.4 \text{ lbf}$$

$$P_{Max6ft\Delta} := \frac{\frac{6 \text{ ft}}{60} \cdot 48 \cdot E \cdot I_y}{(6 \text{ ft})^3} = 105.8 \text{ lbf}$$

$$P_{Max7ft\Delta} := \frac{\frac{7 \text{ ft}}{60} \cdot 48 \cdot E \cdot I_y}{(7 \text{ ft})^3} = 77.8 \text{ lbf}$$

$$P_{Max8ft\Delta} := \frac{\frac{8 \text{ ft}}{60} \cdot 48 \cdot E \cdot I_y}{(8 \text{ ft})^3} = 59.5 \text{ lbf}$$

$$P_{Max9ft\Delta} := \frac{\frac{9 \text{ ft}}{60} \cdot 48 \cdot E \cdot I_y}{(9 \text{ ft})^3} = 47.0 \text{ lbf}$$

$$P_{Max10ft\Delta} := \frac{\frac{10 \text{ ft}}{60} \cdot 48 \cdot E \cdot I_y}{(10 \text{ ft})^3} = 38.1 \text{ lbf}$$

Maximum Allowable Design Pressures For Cantilevered Battens:

Maximum Allowable Loads for Cantilevered Battens:

Max Distributed Load Weak Axis:

$$w_{1ftC} := \min \left(\frac{M_{MaxWA} \cdot 2}{(1 \text{ ft})^2}, \frac{V_{MaxWA}}{1 \text{ ft}} \right) - w_{DL} = 223.4 \text{ plf}$$

$$w_{2ftC} := \min \left(\frac{M_{MaxWA} \cdot 2}{(2 \text{ ft})^2}, \frac{V_{MaxWA}}{2 \text{ ft}} \right) - w_{DL} = 55.4 \text{ plf}$$

$$w_{3ftC} := \min \left(\frac{M_{MaxWA} \cdot 2}{(3 \text{ ft})^2}, \frac{V_{MaxWA}}{3 \text{ ft}} \right) - w_{DL} = 24.3 \text{ plf}$$

$$w_{4ftC} := \min \left(\frac{M_{MaxWA} \cdot 2}{(4 \text{ ft})^2}, \frac{V_{MaxWA}}{4 \text{ ft}} \right) - w_{DL} = 13.4 \text{ plf}$$

$$w_{5ftC} := \min \left(\frac{M_{MaxWA} \cdot 2}{(5 \text{ ft})^2}, \frac{V_{MaxWA}}{5 \text{ ft}} \right) - w_{DL} = 8.4 \text{ plf}$$

$$w_{6ftC} := \min \left(\frac{M_{MaxWA} \cdot 2}{(6 \text{ ft})^2}, \frac{V_{MaxWA}}{6 \text{ ft}} \right) - w_{DL} = 5.6 \text{ plf}$$

$$w_{7ftC} := \min \left(\frac{M_{MaxWA} \cdot 2}{(7 \text{ ft})^2}, \frac{V_{MaxWA}}{7 \text{ ft}} \right) - w_{DL} = 4.0 \text{ plf}$$

Max Point Loads Weak Axis:

$$P_{Max1ftC} := \min \left(\frac{M_{MaxWA}}{1 \text{ ft}}, V_{MaxWA} \right) - w_{DL} \cdot 1 \text{ ft} = 111 \text{ lbf}$$

$$P_{Max2ftC} := \min \left(\frac{M_{MaxWA}}{2 \text{ ft}}, V_{MaxWA} \right) - w_{DL} \cdot 2 \text{ ft} = 55 \text{ lbf}$$

$$P_{Max3ftC} := \min \left(\frac{M_{MaxWA}}{3 \text{ ft}}, V_{MaxWA} \right) - w_{DL} \cdot 3 \text{ ft} = 36 \text{ lbf}$$

$$P_{Max4ftC} := \min \left(\frac{M_{MaxWA}}{4 \text{ ft}}, V_{MaxWA} \right) - w_{DL} \cdot 4 \text{ ft} = 26 \text{ lbf}$$

$$P_{Max5ftC} := \min \left(\frac{M_{MaxWA}}{5 \text{ ft}}, V_{MaxWA} \right) - w_{DL} \cdot 5 \text{ ft} = 20 \text{ lbf}$$

$$P_{Max6ftC} := \min \left(\frac{M_{MaxWA}}{6 \text{ ft}}, V_{MaxWA} \right) - w_{DL} \cdot 6 \text{ ft} = 15 \text{ lbf}$$

$$P_{Max7ftC} := \min \left(\frac{M_{MaxWA}}{7 \text{ ft}}, V_{MaxWA} \right) - w_{DL} \cdot 7 \text{ ft} = 12 \text{ lbf}$$

Max Distributed Load For Deflection - Weak Axis:

$$w_{1ftC\Delta} := \frac{\frac{2 \cdot 1 \text{ ft}}{60} \cdot 8 \cdot E \cdot I_y}{(1 \text{ ft})^4} = 1270.0 \text{ plf}$$

$$w_{2ftC\Delta} := \frac{\frac{2 \cdot 2 \text{ ft}}{60} \cdot 8 \cdot E \cdot I_y}{(2 \text{ ft})^4} = 158.7 \text{ plf}$$

$$w_{3ftC\Delta} := \frac{\frac{2 \cdot 3 \text{ ft}}{60} \cdot 8 \cdot E \cdot I_y}{(3 \text{ ft})^4} = 47.0 \text{ plf}$$

$$w_{4ftC\Delta} := \frac{\frac{2 \cdot 4 \text{ ft}}{60} \cdot 8 \cdot E \cdot I_y}{(4 \text{ ft})^4} = 19.8 \text{ plf}$$

$$w_{5ftC\Delta} := \frac{\frac{2 \cdot 5 \text{ ft}}{60} \cdot 8 \cdot E \cdot I_y}{(5 \text{ ft})^4} = 10.2 \text{ plf}$$

$$w_{6ftC\Delta} := \frac{\frac{2 \cdot 6 \text{ ft}}{60} \cdot 8 \cdot E \cdot I_y}{(6 \text{ ft})^4} = 5.9 \text{ plf}$$

$$w_{7ftC\Delta} := \frac{\frac{2 \cdot 7 \text{ ft}}{60} \cdot 8 \cdot E \cdot I_y}{(7 \text{ ft})^4} = 3.7 \text{ plf}$$

Max Point Load For Deflection - Weak Axis:

$$P_{Max1ftC\Delta} := \frac{\frac{2 \cdot 1 \text{ ft}}{60} \cdot 3 \cdot E \cdot I_y}{(1 \text{ ft})^3} = 476.2 \text{ lbf}$$

$$P_{Max2ftC\Delta} := \frac{\frac{2 \cdot 2 \text{ ft}}{60} \cdot 3 \cdot E \cdot I_y}{(2 \text{ ft})^3} = 119.1 \text{ lbf}$$

$$P_{Max3ftC\Delta} := \frac{\frac{2 \cdot 3 \text{ ft}}{60} \cdot 3 \cdot E \cdot I_y}{(3 \text{ ft})^3} = 52.9 \text{ lbf}$$

$$P_{Max4ftC\Delta} := \frac{\frac{2 \cdot 4 \text{ ft}}{60} \cdot 3 \cdot E \cdot I_y}{(4 \text{ ft})^3} = 29.8 \text{ lbf}$$

$$P_{Max5ftC\Delta} := \frac{\frac{2 \cdot 5 \text{ ft}}{60} \cdot 3 \cdot E \cdot I_y}{(5 \text{ ft})^3} = 19.0 \text{ lbf}$$

$$P_{Max6ftC\Delta} := \frac{\frac{2 \cdot 6 \text{ ft}}{60} \cdot 3 \cdot E \cdot I_y}{(6 \text{ ft})^3} = 13.2 \text{ lbf}$$

$$P_{Max7ftC\Delta} := \frac{\frac{2 \cdot 7 \text{ ft}}{60} \cdot 3 \cdot E \cdot I_y}{(7 \text{ ft})^3} = 9.7 \text{ lbf}$$

Span Table Summary - Weak Axis 1x2WIDE:

Span	Max Distributed (plf)	Max Point	
1 ft	$\frac{\min(w_{1ft}, w_{1ft\Delta})}{plf}$	$\min(P_{Max1ft}, P_{Max1ft\Delta})$	
2 ft	$\frac{\min(w_{2ft}, w_{2ft\Delta})}{plf}$	$\min(P_{Max2ft}, P_{Max2ft\Delta})$	
3 ft	$\frac{\min(w_{3ft}, w_{3ft\Delta})}{plf}$	$\min(P_{Max3ft}, P_{Max3ft\Delta})$	
4 ft	$\frac{\min(w_{4ft}, w_{4ft\Delta})}{plf}$	$\min(P_{Max4ft}, P_{Max4ft\Delta})$	
5 ft	$\frac{\min(w_{5ft}, w_{5ft\Delta})}{plf}$	$\min(P_{Max5ft}, P_{Max5ft\Delta})$	
6 ft	$\frac{\min(w_{6ft}, w_{6ft\Delta})}{plf}$	$\min(P_{Max6ft}, P_{Max6ft\Delta})$	
7 ft	$\frac{\min(w_{7ft}, w_{7ft\Delta})}{plf}$	$\min(P_{Max7ft}, P_{Max7ft\Delta})$	
8 ft	$\frac{\min(w_{8ft}, w_{8ft\Delta})}{plf}$	$\min(P_{Max8ft}, P_{Max8ft\Delta})$	
9 ft	$\frac{\min(w_{9ft}, w_{9ft\Delta})}{plf}$	$\min(P_{Max9ft}, P_{Max9ft\Delta})$	
10 ft	$\frac{\min(w_{10ft}, w_{10ft\Delta})}{plf}$	$\min(P_{Max10ft}, P_{Max10ft\Delta})$	

WA1x2 :=

1.0 ft	895.5	447.8 lbf
2.0 ft	223.4	223.4 lbf
3.0 ft	99.0	148.5 lbf
4.0 ft	55.4	110.9 lbf
5.0 ft	35.3	88.2 lbf
6.0 ft	24.3	72.9 lbf
7.0 ft	17.7	62.0 lbf
8.0 ft	11.9	53.7 lbf
9.0 ft	8.4	47.0 lbf
10.0 ft	6.1	38.1 lbf

Span	Max Distributed (plf)	Max Point	
1 ft	$\frac{\min(w_{1ftC}, w_{1ftC\Delta})}{plf}$	$\min(P_{Max1ftC}, P_{Max1ftC\Delta})$	
2 ft	$\frac{\min(w_{2ftC}, w_{2ftC\Delta})}{plf}$	$\min(P_{Max2ftC}, P_{Max2ftC\Delta})$	
3 ft	$\frac{\min(w_{3ftC}, w_{3ftC\Delta})}{plf}$	$\min(P_{Max3ftC}, P_{Max3ftC\Delta})$	
4 ft	$\frac{\min(w_{4ftC}, w_{4ftC\Delta})}{plf}$	$\min(P_{Max4ftC}, P_{Max4ftC\Delta})$	
5 ft	$\frac{\min(w_{5ftC}, w_{5ftC\Delta})}{plf}$	$\min(P_{Max5ftC}, P_{Max5ftC\Delta})$	
6 ft	$\frac{\min(w_{6ftC}, w_{6ftC\Delta})}{plf}$	$\min(P_{Max6ftC}, P_{Max6ftC\Delta})$	
7 ft	$\frac{\min(w_{7ftC}, w_{7ftC\Delta})}{plf}$	$\min(P_{Max7ftC}, P_{Max7ftC\Delta})$	

WA1x2C :=

1.0 ft	223.4	111.4 lbf
2.0 ft	55.4	54.8 lbf
3.0 ft	24.3	35.6 lbf
4.0 ft	13.4	25.7 lbf
5.0 ft	8.4	19.0 lbf
6.0 ft	5.6	13.2 lbf
7.0 ft	3.7	9.7 lbf

Check 1x3WIDE Batten (KEB7525FWIDE/KEB2525MV2 - 6063-T5) - Strong Axis:

$$d_b := 75 \text{ mm} = 3.0 \text{ in} \quad \text{Depth of Member} \quad s_b := 25 \text{ mm} = 1.0 \text{ in} \quad \text{Width of Member}$$

$$w_{DL} := w_{selfB7525W} = 0.93 \text{ plf} \quad \text{Self Weight of Member} \quad I_x := I_{xB7525W} = 0.662 \text{ in}^4$$

Max allowable moments and shear considering batten simply supported between 2 supports. Note, dead load does not cause bending in this orientation.

Maximum Allowable Batten Moment:

Strong axis bending:

$$F_{ab6063T5} = 9.7 \text{ ksi}$$

Max Allowable Bending Stress per ADM

$$M_{MaxSA} := F_{ab6063T5} \cdot S_{xB7525W} = 4.34 \text{ kip} \cdot \text{in}$$

Max Moment Allowed for Batten - Strong Axis Bending

Maximum Allowable Batten Shear:

$$F_{av1x3} = 5.7 \text{ ksi}$$

Max Allowable Shear Stress per ADM

$$V_{MaxSA} := F_{av1x3} \cdot 2 \cdot A_{webB7525Wy} = 0.66 \text{ kip}$$

Max Shear Allowed for Batten - Strong Axis

Maximum Allowable Design Pressures For Different Spans:

Maximum Allowable Loads for Simply Supported Battens:

Max Distributed Load Strong Axis:**Max Point Loads Strong Axis:**

$$w_{1ft} := \min \left(\frac{M_{MaxSA} \cdot 8}{(1 \text{ ft})^2}, \frac{2 \cdot V_{MaxSA}}{1 \text{ ft}} \right) - w_{DL} = 1319.9 \text{ plf} \quad P_{Max1ft} := \min \left(\frac{\left(M_{MaxSA} - \frac{w_{DL} \cdot (1 \text{ ft})^2}{8} \right) \cdot 4}{1 \text{ ft}}, V_{MaxSA} \right) = 660 \text{ lbf}$$

$$w_{2ft} := \min \left(\frac{M_{MaxSA} \cdot 8}{(2 \text{ ft})^2}, \frac{2 \cdot V_{MaxSA}}{2 \text{ ft}} \right) - w_{DL} = 659.5 \text{ plf} \quad P_{Max2ft} := \min \left(\frac{\left(M_{MaxSA} - \frac{w_{DL} \cdot (2 \text{ ft})^2}{8} \right) \cdot 4}{2 \text{ ft}}, V_{MaxSA} \right) = 660 \text{ lbf}$$

$$w_{3ft} := \min \left(\frac{M_{MaxSA} \cdot 8}{(3 \text{ ft})^2}, \frac{2 \cdot V_{MaxSA}}{3 \text{ ft}} \right) - w_{DL} = 320.6 \text{ plf} \quad P_{Max3ft} := \min \left(\frac{\left(M_{MaxSA} - \frac{w_{DL} \cdot (3 \text{ ft})^2}{8} \right) \cdot 4}{3 \text{ ft}}, V_{MaxSA} \right) = 481 \text{ lbf}$$

$$w_{4ft} := \min \left(\frac{M_{MaxSA} \cdot 8}{(4 \text{ ft})^2}, \frac{2 \cdot V_{MaxSA}}{4 \text{ ft}} \right) - w_{DL} = 179.9 \text{ plf} \quad P_{Max4ft} := \min \left(\frac{\left(M_{MaxSA} - \frac{w_{DL} \cdot (4 \text{ ft})^2}{8} \right) \cdot 4}{4 \text{ ft}}, V_{MaxSA} \right) = 360 \text{ lbf}$$

$$w_{5ft} := \min \left(\frac{M_{MaxSA} \cdot 8}{(5 \text{ ft})^2}, \frac{2 \cdot V_{MaxSA}}{5 \text{ ft}} \right) - w_{DL} = 114.8 \text{ plf} \quad P_{Max5ft} := \min \left(\frac{\left(M_{MaxSA} - \frac{w_{DL} \cdot (5 \text{ ft})^2}{8} \right) \cdot 4}{5 \text{ ft}}, V_{MaxSA} \right) = 287 \text{ lbf}$$

$$w_{6ft} := \min \left(\frac{M_{MaxSA} \cdot 8}{(6 \text{ ft})^2}, \frac{2 \cdot V_{MaxSA}}{6 \text{ ft}} \right) - w_{DL} = 79.4 \text{ plf} \quad P_{Max6ft} := \min \left(\frac{\left(M_{MaxSA} - \frac{w_{DL} \cdot (6 \text{ ft})^2}{8} \right) \cdot 4}{6 \text{ ft}}, V_{MaxSA} \right) = 238 \text{ lbf}$$

$$w_{7ft} := \min \left(\frac{M_{MaxSA} \cdot 8}{(7 \text{ ft})^2}, \frac{2 \cdot V_{MaxSA}}{7 \text{ ft}} \right) - w_{DL} = 58.1 \text{ plf} \quad P_{Max7ft} := \min \left(\frac{\left(M_{MaxSA} - \frac{w_{DL} \cdot (7 \text{ ft})^2}{8} \right) \cdot 4}{7 \text{ ft}}, V_{MaxSA} \right) = 203 \text{ lbf}$$

$$w_{8ft} := \min \left(\frac{M_{MaxSA} \cdot 8}{(8 \text{ ft})^2}, \frac{2 \cdot V_{MaxSA}}{8 \text{ ft}} \right) - w_{DL} = 44.3 \text{ plf} \quad P_{Max8ft} := \min \left(\frac{\left(M_{MaxSA} - \frac{w_{DL} \cdot (8 \text{ ft})^2}{8} \right) \cdot 4}{8 \text{ ft}}, V_{MaxSA} \right) = 177 \text{ lbf}$$

$$w_{9ft} := \min \left(\frac{M_{MaxSA} \cdot 8}{(9 \text{ ft})^2}, \frac{2 \cdot V_{MaxSA}}{9 \text{ ft}} \right) - w_{DL} = 34.8 \text{ plf} \quad P_{Max9ft} := \min \left(\frac{\left(M_{MaxSA} - \frac{w_{DL} \cdot (9 \text{ ft})^2}{8} \right) \cdot 4}{9 \text{ ft}}, V_{MaxSA} \right) = 157 \text{ lbf}$$

$$w_{10ft} := \min \left(\frac{M_{MaxSA} \cdot 8}{(10 \text{ ft})^2}, \frac{2 \cdot V_{MaxSA}}{10 \text{ ft}} \right) - w_{DL} = 28.0 \text{ plf} \quad P_{Max10ft} := \min \left(\frac{\left(M_{MaxSA} - \frac{w_{DL} \cdot (10 \text{ ft})^2}{8} \right) \cdot 4}{10 \text{ ft}}, V_{MaxSA} \right) = 140 \text{ lbf}$$

Max Distributed Load For Deflection - Strong Axis:

$$w_{1ft\Delta} := \frac{\frac{1 \text{ ft}}{60} \cdot 384 \cdot E \cdot I_x}{5 \cdot (1 \text{ ft})^4} = 59450.8 \text{ plf}$$

$$w_{2ft\Delta} := \frac{\frac{2 \text{ ft}}{60} \cdot 384 \cdot E \cdot I_x}{5 \cdot (2 \text{ ft})^4} = 7431.4 \text{ plf}$$

$$w_{3ft\Delta} := \frac{\frac{3 \text{ ft}}{60} \cdot 384 \cdot E \cdot I_x}{5 \cdot (3 \text{ ft})^4} = 2201.9 \text{ plf}$$

$$w_{4ft\Delta} := \frac{\frac{4 \text{ ft}}{60} \cdot 384 \cdot E \cdot I_x}{5 \cdot (4 \text{ ft})^4} = 928.9 \text{ plf}$$

$$w_{5ft\Delta} := \frac{\frac{5 \text{ ft}}{60} \cdot 384 \cdot E \cdot I_x}{5 \cdot (5 \text{ ft})^4} = 475.6 \text{ plf}$$

$$w_{6ft\Delta} := \frac{\frac{6 \text{ ft}}{60} \cdot 384 \cdot E \cdot I_x}{5 \cdot (6 \text{ ft})^4} = 275.2 \text{ plf}$$

$$w_{7ft\Delta} := \frac{\frac{7 \text{ ft}}{60} \cdot 384 \cdot E \cdot I_x}{5 \cdot (7 \text{ ft})^4} = 173.3 \text{ plf}$$

$$w_{8ft\Delta} := \frac{\frac{8 \text{ ft}}{60} \cdot 384 \cdot E \cdot I_x}{5 \cdot (8 \text{ ft})^4} = 116.1 \text{ plf}$$

$$w_{9ft\Delta} := \frac{\frac{9 \text{ ft}}{60} \cdot 384 \cdot E \cdot I_x}{5 \cdot (9 \text{ ft})^4} = 81.6 \text{ plf}$$

$$w_{10ft\Delta} := \frac{\frac{10 \text{ ft}}{60} \cdot 384 \cdot E \cdot I_x}{5 \cdot (10 \text{ ft})^4} = 59.5 \text{ plf}$$

Max Point Load For Deflection - Strong Axis:

$$P_{Max1ft\Delta} := \frac{\frac{1 \text{ ft}}{60} \cdot 48 \cdot E \cdot I_x}{(1 \text{ ft})^3} = 37156.8 \text{ lbf}$$

$$P_{Max2ft\Delta} := \frac{\frac{2 \text{ ft}}{60} \cdot 48 \cdot E \cdot I_x}{(2 \text{ ft})^3} = 9289.2 \text{ lbf}$$

$$P_{Max3ft\Delta} := \frac{\frac{3 \text{ ft}}{60} \cdot 48 \cdot E \cdot I_x}{(3 \text{ ft})^3} = 4128.5 \text{ lbf}$$

$$P_{Max4ft\Delta} := \frac{\frac{4 \text{ ft}}{60} \cdot 48 \cdot E \cdot I_x}{(4 \text{ ft})^3} = 2322.3 \text{ lbf}$$

$$P_{Max5ft\Delta} := \frac{\frac{5 \text{ ft}}{60} \cdot 48 \cdot E \cdot I_x}{(5 \text{ ft})^3} = 1486.3 \text{ lbf}$$

$$P_{Max6ft\Delta} := \frac{\frac{6 \text{ ft}}{60} \cdot 48 \cdot E \cdot I_x}{(6 \text{ ft})^3} = 1032.1 \text{ lbf}$$

$$P_{Max7ft\Delta} := \frac{\frac{7 \text{ ft}}{60} \cdot 48 \cdot E \cdot I_x}{(7 \text{ ft})^3} = 758.3 \text{ lbf}$$

$$P_{Max8ft\Delta} := \frac{\frac{8 \text{ ft}}{60} \cdot 48 \cdot E \cdot I_x}{(8 \text{ ft})^3} = 580.6 \text{ lbf}$$

$$P_{Max9ft\Delta} := \frac{\frac{9 \text{ ft}}{60} \cdot 48 \cdot E \cdot I_x}{(9 \text{ ft})^3} = 458.7 \text{ lbf}$$

$$P_{Max10ft\Delta} := \frac{\frac{10 \text{ ft}}{60} \cdot 48 \cdot E \cdot I_x}{(10 \text{ ft})^3} = 371.6 \text{ lbf}$$

Maximum Allowable Design Pressures For Cantilevered Battens:

Maximum Allowable Loads for Cantilevered Battens:

Max Distributed Load Strong Axis:

$$w_{1ftC} := \min\left(\frac{M_{MaxSA} \cdot 2}{(1 \text{ ft})^2}, \frac{V_{MaxSA}}{1 \text{ ft}}\right) - w_{DL} = 659.9 \text{ plf}$$

$$w_{2ftC} := \min\left(\frac{M_{MaxSA} \cdot 2}{(2 \text{ ft})^2}, \frac{V_{MaxSA}}{2 \text{ ft}}\right) - w_{DL} = 179.9 \text{ plf}$$

$$w_{3ftC} := \min\left(\frac{M_{MaxSA} \cdot 2}{(3 \text{ ft})^2}, \frac{V_{MaxSA}}{3 \text{ ft}}\right) - w_{DL} = 79.4 \text{ plf}$$

$$w_{4ftC} := \min\left(\frac{M_{MaxSA} \cdot 2}{(4 \text{ ft})^2}, \frac{V_{MaxSA}}{4 \text{ ft}}\right) - w_{DL} = 44.3 \text{ plf}$$

$$w_{5ftC} := \min\left(\frac{M_{MaxSA} \cdot 2}{(5 \text{ ft})^2}, \frac{V_{MaxSA}}{5 \text{ ft}}\right) - w_{DL} = 28.0 \text{ plf}$$

$$w_{6ftC} := \min\left(\frac{M_{MaxSA} \cdot 2}{(6 \text{ ft})^2}, \frac{V_{MaxSA}}{6 \text{ ft}}\right) - w_{DL} = 19.2 \text{ plf}$$

$$w_{7ftC} := \min\left(\frac{M_{MaxSA} \cdot 2}{(7 \text{ ft})^2}, \frac{V_{MaxSA}}{7 \text{ ft}}\right) - w_{DL} = 13.8 \text{ plf}$$

Max Point Loads Strong Axis:

$$P_{Max1ftC} := \min\left(\frac{M_{MaxSA}}{1 \text{ ft}}, V_{MaxSA}\right) - w_{DL} \cdot 1 \text{ ft} = 361 \text{ lbf}$$

$$P_{Max2ftC} := \min\left(\frac{M_{MaxSA}}{2 \text{ ft}}, V_{MaxSA}\right) - w_{DL} \cdot 2 \text{ ft} = 179 \text{ lbf}$$

$$P_{Max3ftC} := \min\left(\frac{M_{MaxSA}}{3 \text{ ft}}, V_{MaxSA}\right) - w_{DL} \cdot 3 \text{ ft} = 118 \text{ lbf}$$

$$P_{Max4ftC} := \min\left(\frac{M_{MaxSA}}{4 \text{ ft}}, V_{MaxSA}\right) - w_{DL} \cdot 4 \text{ ft} = 87 \text{ lbf}$$

$$P_{Max5ftC} := \min\left(\frac{M_{MaxSA}}{5 \text{ ft}}, V_{MaxSA}\right) - w_{DL} \cdot 5 \text{ ft} = 68 \text{ lbf}$$

$$P_{Max6ftC} := \min\left(\frac{M_{MaxSA}}{6 \text{ ft}}, V_{MaxSA}\right) - w_{DL} \cdot 6 \text{ ft} = 55 \text{ lbf}$$

$$P_{Max7ftC} := \min\left(\frac{M_{MaxSA}}{7 \text{ ft}}, V_{MaxSA}\right) - w_{DL} \cdot 7 \text{ ft} = 45 \text{ lbf}$$

Max Distributed Load For Deflection - Strong Axis:

$$w_{1ftCD} := \frac{\frac{2 \cdot 1 \text{ ft}}{60} \cdot 8 \cdot E \cdot I_x}{(1 \text{ ft})^4} = 12385.6 \text{ plf}$$

$$w_{2ftCD} := \frac{\frac{2 \cdot 2 \text{ ft}}{60} \cdot 8 \cdot E \cdot I_x}{(2 \text{ ft})^4} = 1548.2 \text{ plf}$$

$$w_{3ftCD} := \frac{\frac{2 \cdot 3 \text{ ft}}{60} \cdot 8 \cdot E \cdot I_x}{(3 \text{ ft})^4} = 458.7 \text{ plf}$$

$$w_{4ftCD} := \frac{\frac{2 \cdot 4 \text{ ft}}{60} \cdot 8 \cdot E \cdot I_x}{(4 \text{ ft})^4} = 193.5 \text{ plf}$$

$$w_{5ftCD} := \frac{\frac{2 \cdot 5 \text{ ft}}{60} \cdot 8 \cdot E \cdot I_x}{(5 \text{ ft})^4} = 99.1 \text{ plf}$$

$$w_{6ftCD} := \frac{\frac{2 \cdot 6 \text{ ft}}{60} \cdot 8 \cdot E \cdot I_x}{(6 \text{ ft})^4} = 57.3 \text{ plf}$$

$$w_{7ftCD} := \frac{\frac{2 \cdot 7 \text{ ft}}{60} \cdot 8 \cdot E \cdot I_x}{(7 \text{ ft})^4} = 36.1 \text{ plf}$$

Max Point Load For Deflection - Strong Axis:

$$P_{Max1ftCD} := \frac{\frac{2 \cdot 1 \text{ ft}}{60} \cdot 3 \cdot E \cdot I_x}{(1 \text{ ft})^3} = 4644.6 \text{ lbf}$$

$$P_{Max2ftCD} := \frac{\frac{2 \cdot 2 \text{ ft}}{60} \cdot 3 \cdot E \cdot I_x}{(2 \text{ ft})^3} = 1161.1 \text{ lbf}$$

$$P_{Max3ftCD} := \frac{\frac{2 \cdot 3 \text{ ft}}{60} \cdot 3 \cdot E \cdot I_x}{(3 \text{ ft})^3} = 516.1 \text{ lbf}$$

$$P_{Max4ftCD} := \frac{\frac{2 \cdot 4 \text{ ft}}{60} \cdot 3 \cdot E \cdot I_x}{(4 \text{ ft})^3} = 290.3 \text{ lbf}$$

$$P_{Max5ftCD} := \frac{\frac{2 \cdot 5 \text{ ft}}{60} \cdot 3 \cdot E \cdot I_x}{(5 \text{ ft})^3} = 185.8 \text{ lbf}$$

$$P_{Max6ftCD} := \frac{\frac{2 \cdot 6 \text{ ft}}{60} \cdot 3 \cdot E \cdot I_x}{(6 \text{ ft})^3} = 129.0 \text{ lbf}$$

$$P_{Max7ftCD} := \frac{\frac{2 \cdot 7 \text{ ft}}{60} \cdot 3 \cdot E \cdot I_x}{(7 \text{ ft})^3} = 94.8 \text{ lbf}$$

Span Table Summary - Strong Axis 1x3WIDE:

	Span	Max Distributed (plf)	Max Point	
SA1x3:=	1 ft	$\frac{\min(w_{1ft}, w_{1ft\Delta})}{plf}$	$\min(P_{Max1ft}, P_{Max1ft\Delta})$	=
	2 ft	$\frac{\min(w_{2ft}, w_{2ft\Delta})}{plf}$	$\min(P_{Max2ft}, P_{Max2ft\Delta})$	
	3 ft	$\frac{\min(w_{3ft}, w_{3ft\Delta})}{plf}$	$\min(P_{Max3ft}, P_{Max3ft\Delta})$	
	4 ft	$\frac{\min(w_{4ft}, w_{4ft\Delta})}{plf}$	$\min(P_{Max4ft}, P_{Max4ft\Delta})$	
	5 ft	$\frac{\min(w_{5ft}, w_{5ft\Delta})}{plf}$	$\min(P_{Max5ft}, P_{Max5ft\Delta})$	
	6 ft	$\frac{\min(w_{6ft}, w_{6ft\Delta})}{plf}$	$\min(P_{Max6ft}, P_{Max6ft\Delta})$	
	7 ft	$\frac{\min(w_{7ft}, w_{7ft\Delta})}{plf}$	$\min(P_{Max7ft}, P_{Max7ft\Delta})$	
	8 ft	$\frac{\min(w_{8ft}, w_{8ft\Delta})}{plf}$	$\min(P_{Max8ft}, P_{Max8ft\Delta})$	
	9 ft	$\frac{\min(w_{9ft}, w_{9ft\Delta})}{plf}$	$\min(P_{Max9ft}, P_{Max9ft\Delta})$	
	10 ft	$\frac{\min(w_{10ft}, w_{10ft\Delta})}{plf}$	$\min(P_{Max10ft}, P_{Max10ft\Delta})$	
				$\begin{bmatrix} 1.0 \text{ ft} & 1319.9 & 660.4 \text{ lbf} \\ 2.0 \text{ ft} & 659.5 & 660.4 \text{ lbf} \\ 3.0 \text{ ft} & 320.6 & 480.8 \text{ lbf} \\ 4.0 \text{ ft} & 179.9 & 359.8 \text{ lbf} \\ 5.0 \text{ ft} & 114.8 & 287.0 \text{ lbf} \\ 6.0 \text{ ft} & 79.4 & 238.3 \text{ lbf} \\ 7.0 \text{ ft} & 58.1 & 203.4 \text{ lbf} \\ 8.0 \text{ ft} & 44.3 & 177.1 \text{ lbf} \\ 9.0 \text{ ft} & 34.8 & 156.6 \text{ lbf} \\ 10.0 \text{ ft} & 28.0 & 140.0 \text{ lbf} \end{bmatrix}$

	Span	Max Distributed (plf)	Max Point	
SA1x3C:=	1 ft	$\frac{\min(w_{1ftC}, w_{1ftC\Delta})}{plf}$	$\min(P_{Max1ftC}, P_{Max1ftC\Delta})$	=
	2 ft	$\frac{\min(w_{2ftC}, w_{2ftC\Delta})}{plf}$	$\min(P_{Max2ftC}, P_{Max2ftC\Delta})$	
	3 ft	$\frac{\min(w_{3ftC}, w_{3ftC\Delta})}{plf}$	$\min(P_{Max3ftC}, P_{Max3ftC\Delta})$	
	4 ft	$\frac{\min(w_{4ftC}, w_{4ftC\Delta})}{plf}$	$\min(P_{Max4ftC}, P_{Max4ftC\Delta})$	
	5 ft	$\frac{\min(w_{5ftC}, w_{5ftC\Delta})}{plf}$	$\min(P_{Max5ftC}, P_{Max5ftC\Delta})$	
	6 ft	$\frac{\min(w_{6ftC}, w_{6ftC\Delta})}{plf}$	$\min(P_{Max6ftC}, P_{Max6ftC\Delta})$	
	7 ft	$\frac{\min(w_{7ftC}, w_{7ftC\Delta})}{plf}$	$\min(P_{Max7ftC}, P_{Max7ftC\Delta})$	
				$\begin{bmatrix} 1.0 \text{ ft} & 659.5 & 360.7 \text{ lbf} \\ 2.0 \text{ ft} & 179.9 & 179.0 \text{ lbf} \\ 3.0 \text{ ft} & 79.4 & 117.8 \text{ lbf} \\ 4.0 \text{ ft} & 44.3 & 86.7 \text{ lbf} \\ 5.0 \text{ ft} & 28.0 & 67.7 \text{ lbf} \\ 6.0 \text{ ft} & 19.2 & 54.7 \text{ lbf} \\ 7.0 \text{ ft} & 13.8 & 45.2 \text{ lbf} \end{bmatrix}$

Check 1x3WIDE Batten (KEB7525FWIDE/KEB2525MV2 - 6063-T5) - Weak Axis:

$$d_b := 75 \text{ mm} = 3.0 \text{ in} \quad \text{Depth of Member} \quad s_b := 25 \text{ mm} = 1.0 \text{ in} \quad \text{Width of Member}$$

$$w_{DL} := w_{selfB7525W} = 0.93 \text{ plf} \quad \text{Self Weight of Member} \quad I_y := I_{yB7525W} = 0.102 \text{ in}^4$$

Max allowable moments and shear considering batten simply supported between 2 supports. Note, dead load does not cause bending in this orientation.

Maximum Allowable Batten Moment:

Strong axis bending:

$$F_{ab6063T5} = 9.7 \text{ ksi}$$

Max Allowable Bending Stress per ADM

$$M_{MaxWA} := F_{ab6063T5} \cdot S_{yB7525W} = 1.90 \text{ kip} \cdot \text{in}$$

Max Moment Allowed for Batten - Weak Axis Bending

Maximum Allowable Batten Shear:

$$F_{av1x3} = 5.7 \text{ ksi}$$

Max Allowable Shear Stress per ADM

$$V_{MaxWA} := F_{av1x3} \cdot 2 \cdot A_{webB7525Wx} = 0.66 \text{ kip}$$

Max Shear Allowed for Batten - Weak Axis

Maximum Allowable Design Pressures For Different Spans:

Maximum Allowable Loads for Simply Supported Battens:

Max Distributed Load Weak Axis:**Max Point Loads Weak Axis:**

$$w_{1ft} := \min \left(\frac{M_{MaxWA} \cdot 8}{(1 \text{ ft})^2}, \frac{2 \cdot V_{MaxWA}}{1 \text{ ft}} \right) - w_{DL} = 1266.3 \text{ plf} \quad P_{Max1ft} := \min \left(\frac{\left(M_{MaxWA} - \frac{w_{DL} \cdot (1 \text{ ft})^2}{8} \right) \cdot 4}{1 \text{ ft}}, V_{MaxWA} \right) = 633 \text{ lbf}$$

$$w_{2ft} := \min \left(\frac{M_{MaxWA} \cdot 8}{(2 \text{ ft})^2}, \frac{2 \cdot V_{MaxWA}}{2 \text{ ft}} \right) - w_{DL} = 315.9 \text{ plf} \quad P_{Max2ft} := \min \left(\frac{\left(M_{MaxWA} - \frac{w_{DL} \cdot (2 \text{ ft})^2}{8} \right) \cdot 4}{2 \text{ ft}}, V_{MaxWA} \right) = 316 \text{ lbf}$$

$$w_{3ft} := \min \left(\frac{M_{MaxWA} \cdot 8}{(3 \text{ ft})^2}, \frac{2 \cdot V_{MaxWA}}{3 \text{ ft}} \right) - w_{DL} = 139.9 \text{ plf} \quad P_{Max3ft} := \min \left(\frac{\left(M_{MaxWA} - \frac{w_{DL} \cdot (3 \text{ ft})^2}{8} \right) \cdot 4}{3 \text{ ft}}, V_{MaxWA} \right) = 210 \text{ lbf}$$

$$w_{4ft} := \min \left(\frac{M_{MaxWA} \cdot 8}{(4 \text{ ft})^2}, \frac{2 \cdot V_{MaxWA}}{4 \text{ ft}} \right) - w_{DL} = 78.3 \text{ plf} \quad P_{Max4ft} := \min \left(\frac{\left(M_{MaxWA} - \frac{w_{DL} \cdot (4 \text{ ft})^2}{8} \right) \cdot 4}{4 \text{ ft}}, V_{MaxWA} \right) = 157 \text{ lbf}$$

$$w_{5ft} := \min \left(\frac{M_{MaxWA} \cdot 8}{(5 \text{ ft})^2}, \frac{2 \cdot V_{MaxWA}}{5 \text{ ft}} \right) - w_{DL} = 49.8 \text{ plf} \quad P_{Max5ft} := \min \left(\frac{\left(M_{MaxWA} - \frac{w_{DL} \cdot (5 \text{ ft})^2}{8} \right) \cdot 4}{5 \text{ ft}}, V_{MaxWA} \right) = 124 \text{ lbf}$$

$$w_{6ft} := \min \left(\frac{M_{MaxWA} \cdot 8}{(6 \text{ ft})^2}, \frac{2 \cdot V_{MaxWA}}{6 \text{ ft}} \right) - w_{DL} = 34.3 \text{ plf} \quad P_{Max6ft} := \min \left(\frac{\left(M_{MaxWA} - \frac{w_{DL} \cdot (6 \text{ ft})^2}{8} \right) \cdot 4}{6 \text{ ft}}, V_{MaxWA} \right) = 103 \text{ lbf}$$

$$w_{7ft} := \min \left(\frac{M_{MaxWA} \cdot 8}{(7 \text{ ft})^2}, \frac{2 \cdot V_{MaxWA}}{7 \text{ ft}} \right) - w_{DL} = 24.9 \text{ plf} \quad P_{Max7ft} := \min \left(\frac{\left(M_{MaxWA} - \frac{w_{DL} \cdot (7 \text{ ft})^2}{8} \right) \cdot 4}{7 \text{ ft}}, V_{MaxWA} \right) = 87 \text{ lbf}$$

$$w_{8ft} := \min\left(\frac{M_{MaxWA} \cdot 8}{(8 \text{ ft})^2}, \frac{2 \cdot V_{MaxWA}}{8 \text{ ft}}\right) - w_{DL} = 18.9 \text{ plf} \quad P_{Max8ft} := \min\left(\frac{\left(M_{MaxWA} - \frac{w_{DL} \cdot (8 \text{ ft})^2}{8}\right) \cdot 4}{8 \text{ ft}}, V_{MaxWA}\right) = 75 \text{ lbf}$$

$$w_{9ft} := \min\left(\frac{M_{MaxWA} \cdot 8}{(9 \text{ ft})^2}, \frac{2 \cdot V_{MaxWA}}{9 \text{ ft}}\right) - w_{DL} = 14.7 \text{ plf} \quad P_{Max9ft} := \min\left(\frac{\left(M_{MaxWA} - \frac{w_{DL} \cdot (9 \text{ ft})^2}{8}\right) \cdot 4}{9 \text{ ft}}, V_{MaxWA}\right) = 66 \text{ lbf}$$

$$w_{10ft} := \min\left(\frac{M_{MaxWA} \cdot 8}{(10 \text{ ft})^2}, \frac{2 \cdot V_{MaxWA}}{10 \text{ ft}}\right) - w_{DL} = 11.7 \text{ plf} \quad P_{Max10ft} := \min\left(\frac{\left(M_{MaxWA} - \frac{w_{DL} \cdot (10 \text{ ft})^2}{8}\right) \cdot 4}{10 \text{ ft}}, V_{MaxWA}\right) = 59 \text{ lbf}$$

Max Distributed Load For Deflection - Weak Axis:

$$w_{1ft\Delta} := \frac{\frac{1 \text{ ft}}{60} \cdot 384 \cdot E \cdot I_y}{5 \cdot (1 \text{ ft})^4} = 9148.4 \text{ plf}$$

$$w_{2ft\Delta} := \frac{\frac{2 \text{ ft}}{60} \cdot 384 \cdot E \cdot I_y}{5 \cdot (2 \text{ ft})^4} = 1143.5 \text{ plf}$$

$$w_{3ft\Delta} := \frac{\frac{3 \text{ ft}}{60} \cdot 384 \cdot E \cdot I_y}{5 \cdot (3 \text{ ft})^4} = 338.8 \text{ plf}$$

$$w_{4ft\Delta} := \frac{\frac{4 \text{ ft}}{60} \cdot 384 \cdot E \cdot I_y}{5 \cdot (4 \text{ ft})^4} = 142.9 \text{ plf}$$

$$w_{5ft\Delta} := \frac{\frac{5 \text{ ft}}{60} \cdot 384 \cdot E \cdot I_y}{5 \cdot (5 \text{ ft})^4} = 73.2 \text{ plf}$$

$$w_{6ft\Delta} := \frac{\frac{6 \text{ ft}}{60} \cdot 384 \cdot E \cdot I_y}{5 \cdot (6 \text{ ft})^4} = 42.4 \text{ plf}$$

$$w_{7ft\Delta} := \frac{\frac{7 \text{ ft}}{60} \cdot 384 \cdot E \cdot I_y}{5 \cdot (7 \text{ ft})^4} = 26.7 \text{ plf}$$

$$w_{8ft\Delta} := \frac{\frac{8 \text{ ft}}{60} \cdot 384 \cdot E \cdot I_y}{5 \cdot (8 \text{ ft})^4} = 17.9 \text{ plf}$$

$$w_{9ft\Delta} := \frac{\frac{9 \text{ ft}}{60} \cdot 384 \cdot E \cdot I_y}{5 \cdot (9 \text{ ft})^4} = 12.5 \text{ plf}$$

$$w_{10ft\Delta} := \frac{\frac{10 \text{ ft}}{60} \cdot 384 \cdot E \cdot I_y}{5 \cdot (10 \text{ ft})^4} = 9.1 \text{ plf}$$

Max Point Load For Deflection - Weak Axis:

$$P_{Max1ft\Delta} := \frac{\frac{1 \text{ ft}}{60} \cdot 48 \cdot E \cdot I_y}{(1 \text{ ft})^3} = 5717.7 \text{ lbf}$$

$$P_{Max2ft\Delta} := \frac{\frac{2 \text{ ft}}{60} \cdot 48 \cdot E \cdot I_y}{(2 \text{ ft})^3} = 1429.4 \text{ lbf}$$

$$P_{Max3ft\Delta} := \frac{\frac{3 \text{ ft}}{60} \cdot 48 \cdot E \cdot I_y}{(3 \text{ ft})^3} = 635.3 \text{ lbf}$$

$$P_{Max4ft\Delta} := \frac{\frac{4 \text{ ft}}{60} \cdot 48 \cdot E \cdot I_y}{(4 \text{ ft})^3} = 357.4 \text{ lbf}$$

$$P_{Max5ft\Delta} := \frac{\frac{5 \text{ ft}}{60} \cdot 48 \cdot E \cdot I_y}{(5 \text{ ft})^3} = 228.7 \text{ lbf}$$

$$P_{Max6ft\Delta} := \frac{\frac{6 \text{ ft}}{60} \cdot 48 \cdot E \cdot I_y}{(6 \text{ ft})^3} = 158.8 \text{ lbf}$$

$$P_{Max7ft\Delta} := \frac{\frac{7 \text{ ft}}{60} \cdot 48 \cdot E \cdot I_y}{(7 \text{ ft})^3} = 116.7 \text{ lbf}$$

$$P_{Max8ft\Delta} := \frac{\frac{8 \text{ ft}}{60} \cdot 48 \cdot E \cdot I_y}{(8 \text{ ft})^3} = 89.3 \text{ lbf}$$

$$P_{Max9ft\Delta} := \frac{\frac{9 \text{ ft}}{60} \cdot 48 \cdot E \cdot I_y}{(9 \text{ ft})^3} = 70.6 \text{ lbf}$$

$$P_{Max10ft\Delta} := \frac{\frac{10 \text{ ft}}{60} \cdot 48 \cdot E \cdot I_y}{(10 \text{ ft})^3} = 57.2 \text{ lbf}$$

Maximum Allowable Design Pressures For Cantilevered Battens:

Maximum Allowable Loads for Cantilevered Battens:

Max Distributed Load Weak Axis:

$$w_{1ftC} := \min\left(\frac{M_{MaxWA} \cdot 2}{(1 \text{ ft})^2}, \frac{V_{MaxWA}}{1 \text{ ft}}\right) - w_{DL} = 315.9 \text{ plf}$$

$$w_{2ftC} := \min\left(\frac{M_{MaxWA} \cdot 2}{(2 \text{ ft})^2}, \frac{V_{MaxWA}}{2 \text{ ft}}\right) - w_{DL} = 78.3 \text{ plf}$$

$$w_{3ftC} := \min\left(\frac{M_{MaxWA} \cdot 2}{(3 \text{ ft})^2}, \frac{V_{MaxWA}}{3 \text{ ft}}\right) - w_{DL} = 34.3 \text{ plf}$$

$$w_{4ftC} := \min\left(\frac{M_{MaxWA} \cdot 2}{(4 \text{ ft})^2}, \frac{V_{MaxWA}}{4 \text{ ft}}\right) - w_{DL} = 18.9 \text{ plf}$$

$$w_{5ftC} := \min\left(\frac{M_{MaxWA} \cdot 2}{(5 \text{ ft})^2}, \frac{V_{MaxWA}}{5 \text{ ft}}\right) - w_{DL} = 11.7 \text{ plf}$$

$$w_{6ftC} := \min\left(\frac{M_{MaxWA} \cdot 2}{(6 \text{ ft})^2}, \frac{V_{MaxWA}}{6 \text{ ft}}\right) - w_{DL} = 7.9 \text{ plf}$$

$$w_{7ftC} := \min\left(\frac{M_{MaxWA} \cdot 2}{(7 \text{ ft})^2}, \frac{V_{MaxWA}}{7 \text{ ft}}\right) - w_{DL} = 5.5 \text{ plf}$$

Max Point Loads Weak Axis:

$$P_{Max1ftC} := \min\left(\frac{M_{MaxWA}}{1 \text{ ft}}, V_{MaxWA}\right) - w_{DL} \cdot 1 \text{ ft} = 157 \text{ lbf}$$

$$P_{Max2ftC} := \min\left(\frac{M_{MaxWA}}{2 \text{ ft}}, V_{MaxWA}\right) - w_{DL} \cdot 2 \text{ ft} = 77 \text{ lbf}$$

$$P_{Max3ftC} := \min\left(\frac{M_{MaxWA}}{3 \text{ ft}}, V_{MaxWA}\right) - w_{DL} \cdot 3 \text{ ft} = 50 \text{ lbf}$$

$$P_{Max4ftC} := \min\left(\frac{M_{MaxWA}}{4 \text{ ft}}, V_{MaxWA}\right) - w_{DL} \cdot 4 \text{ ft} = 36 \text{ lbf}$$

$$P_{Max5ftC} := \min\left(\frac{M_{MaxWA}}{5 \text{ ft}}, V_{MaxWA}\right) - w_{DL} \cdot 5 \text{ ft} = 27 \text{ lbf}$$

$$P_{Max6ftC} := \min\left(\frac{M_{MaxWA}}{6 \text{ ft}}, V_{MaxWA}\right) - w_{DL} \cdot 6 \text{ ft} = 21 \text{ lbf}$$

$$P_{Max7ftC} := \min\left(\frac{M_{MaxWA}}{7 \text{ ft}}, V_{MaxWA}\right) - w_{DL} \cdot 7 \text{ ft} = 16 \text{ lbf}$$

Max Distributed Load For Deflection - Weak Axis:

$$w_{1ftCD} := \frac{\frac{2 \cdot 1 \text{ ft}}{60} \cdot 8 \cdot E \cdot I_y}{(1 \text{ ft})^4} = 1905.9 \text{ plf}$$

$$w_{2ftCD} := \frac{\frac{2 \cdot 2 \text{ ft}}{60} \cdot 8 \cdot E \cdot I_y}{(2 \text{ ft})^4} = 238.2 \text{ plf}$$

$$w_{3ftCD} := \frac{\frac{2 \cdot 3 \text{ ft}}{60} \cdot 8 \cdot E \cdot I_y}{(3 \text{ ft})^4} = 70.6 \text{ plf}$$

$$w_{4ftCD} := \frac{\frac{2 \cdot 4 \text{ ft}}{60} \cdot 8 \cdot E \cdot I_y}{(4 \text{ ft})^4} = 29.8 \text{ plf}$$

$$w_{5ftCD} := \frac{\frac{2 \cdot 5 \text{ ft}}{60} \cdot 8 \cdot E \cdot I_y}{(5 \text{ ft})^4} = 15.2 \text{ plf}$$

$$w_{6ftCD} := \frac{\frac{2 \cdot 6 \text{ ft}}{60} \cdot 8 \cdot E \cdot I_y}{(6 \text{ ft})^4} = 8.8 \text{ plf}$$

$$w_{7ftCD} := \frac{\frac{2 \cdot 7 \text{ ft}}{60} \cdot 8 \cdot E \cdot I_y}{(7 \text{ ft})^4} = 5.6 \text{ plf}$$

Max Point Load For Deflection - Weak Axis:

$$P_{Max1ftCD} := \frac{\frac{2 \cdot 1 \text{ ft}}{60} \cdot 3 \cdot E \cdot I_y}{(1 \text{ ft})^3} = 714.7 \text{ lbf}$$

$$P_{Max2ftCD} := \frac{\frac{2 \cdot 2 \text{ ft}}{60} \cdot 3 \cdot E \cdot I_y}{(2 \text{ ft})^3} = 178.7 \text{ lbf}$$

$$P_{Max3ftCD} := \frac{\frac{2 \cdot 3 \text{ ft}}{60} \cdot 3 \cdot E \cdot I_y}{(3 \text{ ft})^3} = 79.4 \text{ lbf}$$

$$P_{Max4ftCD} := \frac{\frac{2 \cdot 4 \text{ ft}}{60} \cdot 3 \cdot E \cdot I_y}{(4 \text{ ft})^3} = 44.7 \text{ lbf}$$

$$P_{Max5ftCD} := \frac{\frac{2 \cdot 5 \text{ ft}}{60} \cdot 3 \cdot E \cdot I_y}{(5 \text{ ft})^3} = 28.6 \text{ lbf}$$

$$P_{Max6ftCD} := \frac{\frac{2 \cdot 6 \text{ ft}}{60} \cdot 3 \cdot E \cdot I_y}{(6 \text{ ft})^3} = 19.9 \text{ lbf}$$

$$P_{Max7ftCD} := \frac{\frac{2 \cdot 7 \text{ ft}}{60} \cdot 3 \cdot E \cdot I_y}{(7 \text{ ft})^3} = 14.6 \text{ lbf}$$

Span Table Summary - Weak Axis 1x3WIDE:

Span	Max Distributed (plf)	Max Point	
1 ft	$\frac{\min(w_{1ft}, w_{1ft\Delta})}{plf}$	$\min(P_{Max1ft}, P_{Max1ft\Delta})$	
2 ft	$\frac{\min(w_{2ft}, w_{2ft\Delta})}{plf}$	$\min(P_{Max2ft}, P_{Max2ft\Delta})$	
3 ft	$\frac{\min(w_{3ft}, w_{3ft\Delta})}{plf}$	$\min(P_{Max3ft}, P_{Max3ft\Delta})$	
4 ft	$\frac{\min(w_{4ft}, w_{4ft\Delta})}{plf}$	$\min(P_{Max4ft}, P_{Max4ft\Delta})$	
5 ft	$\frac{\min(w_{5ft}, w_{5ft\Delta})}{plf}$	$\min(P_{Max5ft}, P_{Max5ft\Delta})$	
6 ft	$\frac{\min(w_{6ft}, w_{6ft\Delta})}{plf}$	$\min(P_{Max6ft}, P_{Max6ft\Delta})$	
7 ft	$\frac{\min(w_{7ft}, w_{7ft\Delta})}{plf}$	$\min(P_{Max7ft}, P_{Max7ft\Delta})$	
8 ft	$\frac{\min(w_{8ft}, w_{8ft\Delta})}{plf}$	$\min(P_{Max8ft}, P_{Max8ft\Delta})$	
9 ft	$\frac{\min(w_{9ft}, w_{9ft\Delta})}{plf}$	$\min(P_{Max9ft}, P_{Max9ft\Delta})$	
10 ft	$\frac{\min(w_{10ft}, w_{10ft\Delta})}{plf}$	$\min(P_{Max10ft}, P_{Max10ft\Delta})$	

WA1x3 :=

1.0 ft	1266.3	633.1 lbf
2.0 ft	315.9	315.9 lbf
3.0 ft	139.9	209.8 lbf
4.0 ft	78.3	156.5 lbf
5.0 ft	49.8	124.4 lbf
6.0 ft	34.3	102.8 lbf
7.0 ft	24.9	87.3 lbf
8.0 ft	17.9	75.5 lbf
9.0 ft	12.5	66.2 lbf
10.0 ft	9.1	57.2 lbf

Span	Max Distributed (plf)	Max Point	
1 ft	$\frac{\min(w_{1ftC}, w_{1ftC\Delta})}{plf}$	$\min(P_{Max1ftC}, P_{Max1ftC\Delta})$	
2 ft	$\frac{\min(w_{2ftC}, w_{2ftC\Delta})}{plf}$	$\min(P_{Max2ftC}, P_{Max2ftC\Delta})$	
3 ft	$\frac{\min(w_{3ftC}, w_{3ftC\Delta})}{plf}$	$\min(P_{Max3ftC}, P_{Max3ftC\Delta})$	
4 ft	$\frac{\min(w_{4ftC}, w_{4ftC\Delta})}{plf}$	$\min(P_{Max4ftC}, P_{Max4ftC\Delta})$	
5 ft	$\frac{\min(w_{5ftC}, w_{5ftC\Delta})}{plf}$	$\min(P_{Max5ftC}, P_{Max5ftC\Delta})$	
6 ft	$\frac{\min(w_{6ftC}, w_{6ftC\Delta})}{plf}$	$\min(P_{Max6ftC}, P_{Max6ftC\Delta})$	
7 ft	$\frac{\min(w_{7ftC}, w_{7ftC\Delta})}{plf}$	$\min(P_{Max7ftC}, P_{Max7ftC\Delta})$	

WA1x3C :=

1.0 ft	315.9	157.5 lbf
2.0 ft	78.3	77.3 lbf
3.0 ft	34.3	50.0 lbf
4.0 ft	18.9	35.9 lbf
5.0 ft	11.7	27.0 lbf
6.0 ft	7.9	19.9 lbf
7.0 ft	5.5	14.6 lbf

Check 1x4WIDE Batten (KEB10025FWIDE/KEB2525MV2 - 6063-T5) - Strong Axis:

$$d_b := 100 \text{ mm} = 3.9 \text{ in} \quad \text{Depth of Member} \quad s_b := 25 \text{ mm} = 1.0 \text{ in} \quad \text{Width of Member}$$

$$w_{DL} := w_{selfB10025W} = 1.06 \text{ plf} \quad \text{Self Weight of Member} \quad I_x := I_{xB10025W} = 1.299 \text{ in}^4$$

Max allowable moments and shear considering batten simply supported between 2 supports. Note, dead load does not cause bending in this orientation.

Maximum Allowable Batten Moment:

Strong axis bending:

$$F_{ab6063T5} = 9.7 \text{ ksi}$$

Max Allowable Bending Stress per ADM

$$M_{MaxSA} := F_{ab6063T5} \cdot S_{xB10025W} = 6.40 \text{ kip} \cdot \text{in}$$

Max Moment Allowed for Batten - Strong Axis Bending

Maximum Allowable Batten Shear:

$$F_{av1x4} = 5.2 \text{ ksi}$$

Max Allowable Shear Stress per ADM

$$V_{MaxSA} := F_{av1x4} \cdot 2 \cdot A_{webB10025Wy} = 2.41 \text{ kip}$$

Max Shear Allowed for Batten - Strong Axis

Maximum Allowable Design Pressures For Different Spans:

Maximum Allowable Loads for Simply Supported Battens:

Max Distributed Load Strong Axis:**Max Point Loads Strong Axis:**

$$w_{1ft} := \min \left(\frac{M_{MaxSA} \cdot 8}{(1 \text{ ft})^2}, \frac{2 \cdot V_{MaxSA}}{1 \text{ ft}} \right) - w_{DL} = 4263.0 \text{ plf} \quad P_{Max1ft} := \min \left(\frac{\left(M_{MaxSA} - \frac{w_{DL} \cdot (1 \text{ ft})^2}{8} \right) \cdot 4}{1 \text{ ft}}, V_{MaxSA} \right) = 2132 \text{ lbf}$$

$$w_{2ft} := \min \left(\frac{M_{MaxSA} \cdot 8}{(2 \text{ ft})^2}, \frac{2 \cdot V_{MaxSA}}{2 \text{ ft}} \right) - w_{DL} = 1065.0 \text{ plf} \quad P_{Max2ft} := \min \left(\frac{\left(M_{MaxSA} - \frac{w_{DL} \cdot (2 \text{ ft})^2}{8} \right) \cdot 4}{2 \text{ ft}}, V_{MaxSA} \right) = 1065 \text{ lbf}$$

$$w_{3ft} := \min \left(\frac{M_{MaxSA} \cdot 8}{(3 \text{ ft})^2}, \frac{2 \cdot V_{MaxSA}}{3 \text{ ft}} \right) - w_{DL} = 472.7 \text{ plf} \quad P_{Max3ft} := \min \left(\frac{\left(M_{MaxSA} - \frac{w_{DL} \cdot (3 \text{ ft})^2}{8} \right) \cdot 4}{3 \text{ ft}}, V_{MaxSA} \right) = 709 \text{ lbf}$$

$$w_{4ft} := \min \left(\frac{M_{MaxSA} \cdot 8}{(4 \text{ ft})^2}, \frac{2 \cdot V_{MaxSA}}{4 \text{ ft}} \right) - w_{DL} = 265.4 \text{ plf} \quad P_{Max4ft} := \min \left(\frac{\left(M_{MaxSA} - \frac{w_{DL} \cdot (4 \text{ ft})^2}{8} \right) \cdot 4}{4 \text{ ft}}, V_{MaxSA} \right) = 531 \text{ lbf}$$

$$w_{5ft} := \min \left(\frac{M_{MaxSA} \cdot 8}{(5 \text{ ft})^2}, \frac{2 \cdot V_{MaxSA}}{5 \text{ ft}} \right) - w_{DL} = 169.5 \text{ plf} \quad P_{Max5ft} := \min \left(\frac{\left(M_{MaxSA} - \frac{w_{DL} \cdot (5 \text{ ft})^2}{8} \right) \cdot 4}{5 \text{ ft}}, V_{MaxSA} \right) = 424 \text{ lbf}$$

$$w_{6ft} := \min \left(\frac{M_{MaxSA} \cdot 8}{(6 \text{ ft})^2}, \frac{2 \cdot V_{MaxSA}}{6 \text{ ft}} \right) - w_{DL} = 117.4 \text{ plf} \quad P_{Max6ft} := \min \left(\frac{\left(M_{MaxSA} - \frac{w_{DL} \cdot (6 \text{ ft})^2}{8} \right) \cdot 4}{6 \text{ ft}}, V_{MaxSA} \right) = 352 \text{ lbf}$$

$$w_{7ft} := \min \left(\frac{M_{MaxSA} \cdot 8}{(7 \text{ ft})^2}, \frac{2 \cdot V_{MaxSA}}{7 \text{ ft}} \right) - w_{DL} = 86.0 \text{ plf} \quad P_{Max7ft} := \min \left(\frac{\left(M_{MaxSA} - \frac{w_{DL} \cdot (7 \text{ ft})^2}{8} \right) \cdot 4}{7 \text{ ft}}, V_{MaxSA} \right) = 301 \text{ lbf}$$

$$w_{8ft} := \min\left(\frac{M_{MaxSA} \cdot 8}{(8 \text{ ft})^2}, \frac{2 \cdot V_{MaxSA}}{8 \text{ ft}}\right) - w_{DL} = 65.6 \text{ plf} \quad P_{Max8ft} := \min\left(\frac{\left(M_{MaxSA} - \frac{w_{DL} \cdot (8 \text{ ft})^2}{8}\right) \cdot 4}{8 \text{ ft}}, V_{MaxSA}\right) = 262 \text{ lbf}$$

$$w_{9ft} := \min\left(\frac{M_{MaxSA} \cdot 8}{(9 \text{ ft})^2}, \frac{2 \cdot V_{MaxSA}}{9 \text{ ft}}\right) - w_{DL} = 51.6 \text{ plf} \quad P_{Max9ft} := \min\left(\frac{\left(M_{MaxSA} - \frac{w_{DL} \cdot (9 \text{ ft})^2}{8}\right) \cdot 4}{9 \text{ ft}}, V_{MaxSA}\right) = 232 \text{ lbf}$$

$$w_{10ft} := \min\left(\frac{M_{MaxSA} \cdot 8}{(10 \text{ ft})^2}, \frac{2 \cdot V_{MaxSA}}{10 \text{ ft}}\right) - w_{DL} = 41.6 \text{ plf} \quad P_{Max10ft} := \min\left(\frac{\left(M_{MaxSA} - \frac{w_{DL} \cdot (10 \text{ ft})^2}{8}\right) \cdot 4}{10 \text{ ft}}, V_{MaxSA}\right) = 208 \text{ lbf}$$

Max Distributed Load For Deflection - Strong Axis:

$$w_{1ft\Delta} := \frac{\frac{1 \text{ ft}}{60} \cdot 384 \cdot E \cdot I_x}{5 \cdot (1 \text{ ft})^4} = 116621.3 \text{ plf}$$

$$w_{2ft\Delta} := \frac{\frac{2 \text{ ft}}{60} \cdot 384 \cdot E \cdot I_x}{5 \cdot (2 \text{ ft})^4} = 14577.7 \text{ plf}$$

$$w_{3ft\Delta} := \frac{\frac{3 \text{ ft}}{60} \cdot 384 \cdot E \cdot I_x}{5 \cdot (3 \text{ ft})^4} = 4319.3 \text{ plf}$$

$$w_{4ft\Delta} := \frac{\frac{4 \text{ ft}}{60} \cdot 384 \cdot E \cdot I_x}{5 \cdot (4 \text{ ft})^4} = 1822.2 \text{ plf}$$

$$w_{5ft\Delta} := \frac{\frac{5 \text{ ft}}{60} \cdot 384 \cdot E \cdot I_x}{5 \cdot (5 \text{ ft})^4} = 933.0 \text{ plf}$$

$$w_{6ft\Delta} := \frac{\frac{6 \text{ ft}}{60} \cdot 384 \cdot E \cdot I_x}{5 \cdot (6 \text{ ft})^4} = 539.9 \text{ plf}$$

$$w_{7ft\Delta} := \frac{\frac{7 \text{ ft}}{60} \cdot 384 \cdot E \cdot I_x}{5 \cdot (7 \text{ ft})^4} = 340.0 \text{ plf}$$

$$w_{8ft\Delta} := \frac{\frac{8 \text{ ft}}{60} \cdot 384 \cdot E \cdot I_x}{5 \cdot (8 \text{ ft})^4} = 227.8 \text{ plf}$$

$$w_{9ft\Delta} := \frac{\frac{9 \text{ ft}}{60} \cdot 384 \cdot E \cdot I_x}{5 \cdot (9 \text{ ft})^4} = 160.0 \text{ plf}$$

$$w_{10ft\Delta} := \frac{\frac{10 \text{ ft}}{60} \cdot 384 \cdot E \cdot I_x}{5 \cdot (10 \text{ ft})^4} = 116.6 \text{ plf}$$

Max Point Load For Deflection - Strong Axis:

$$P_{Max1ft\Delta} := \frac{\frac{1 \text{ ft}}{60} \cdot 48 \cdot E \cdot I_x}{(1 \text{ ft})^3} = 72888.3 \text{ lbf}$$

$$P_{Max2ft\Delta} := \frac{\frac{2 \text{ ft}}{60} \cdot 48 \cdot E \cdot I_x}{(2 \text{ ft})^3} = 18222.1 \text{ lbf}$$

$$P_{Max3ft\Delta} := \frac{\frac{3 \text{ ft}}{60} \cdot 48 \cdot E \cdot I_x}{(3 \text{ ft})^3} = 8098.7 \text{ lbf}$$

$$P_{Max4ft\Delta} := \frac{\frac{4 \text{ ft}}{60} \cdot 48 \cdot E \cdot I_x}{(4 \text{ ft})^3} = 4555.5 \text{ lbf}$$

$$P_{Max5ft\Delta} := \frac{\frac{5 \text{ ft}}{60} \cdot 48 \cdot E \cdot I_x}{(5 \text{ ft})^3} = 2915.5 \text{ lbf}$$

$$P_{Max6ft\Delta} := \frac{\frac{6 \text{ ft}}{60} \cdot 48 \cdot E \cdot I_x}{(6 \text{ ft})^3} = 2024.7 \text{ lbf}$$

$$P_{Max7ft\Delta} := \frac{\frac{7 \text{ ft}}{60} \cdot 48 \cdot E \cdot I_x}{(7 \text{ ft})^3} = 1487.5 \text{ lbf}$$

$$P_{Max8ft\Delta} := \frac{\frac{8 \text{ ft}}{60} \cdot 48 \cdot E \cdot I_x}{(8 \text{ ft})^3} = 1138.9 \text{ lbf}$$

$$P_{Max9ft\Delta} := \frac{\frac{9 \text{ ft}}{60} \cdot 48 \cdot E \cdot I_x}{(9 \text{ ft})^3} = 899.9 \text{ lbf}$$

$$P_{Max10ft\Delta} := \frac{\frac{10 \text{ ft}}{60} \cdot 48 \cdot E \cdot I_x}{(10 \text{ ft})^3} = 728.9 \text{ lbf}$$

Maximum Allowable Design Pressures For Cantilevered Battens:

Maximum Allowable Loads for Cantilevered Battens:

Max Distributed Load Strong Axis:

$$w_{1ftC} := \min\left(\frac{M_{MaxSA} \cdot 2}{(1 \text{ ft})^2}, \frac{V_{MaxSA}}{1 \text{ ft}}\right) - w_{DL} = 1065.0 \text{ plf}$$

$$w_{2ftC} := \min\left(\frac{M_{MaxSA} \cdot 2}{(2 \text{ ft})^2}, \frac{V_{MaxSA}}{2 \text{ ft}}\right) - w_{DL} = 265.4 \text{ plf}$$

$$w_{3ftC} := \min\left(\frac{M_{MaxSA} \cdot 2}{(3 \text{ ft})^2}, \frac{V_{MaxSA}}{3 \text{ ft}}\right) - w_{DL} = 117.4 \text{ plf}$$

$$w_{4ftC} := \min\left(\frac{M_{MaxSA} \cdot 2}{(4 \text{ ft})^2}, \frac{V_{MaxSA}}{4 \text{ ft}}\right) - w_{DL} = 65.6 \text{ plf}$$

$$w_{5ftC} := \min\left(\frac{M_{MaxSA} \cdot 2}{(5 \text{ ft})^2}, \frac{V_{MaxSA}}{5 \text{ ft}}\right) - w_{DL} = 41.6 \text{ plf}$$

$$w_{6ftC} := \min\left(\frac{M_{MaxSA} \cdot 2}{(6 \text{ ft})^2}, \frac{V_{MaxSA}}{6 \text{ ft}}\right) - w_{DL} = 28.6 \text{ plf}$$

$$w_{7ftC} := \min\left(\frac{M_{MaxSA} \cdot 2}{(7 \text{ ft})^2}, \frac{V_{MaxSA}}{7 \text{ ft}}\right) - w_{DL} = 20.7 \text{ plf}$$

Max Point Loads Strong Axis:

$$P_{Max1ftC} := \min\left(\frac{M_{MaxSA}}{1 \text{ ft}}, V_{MaxSA}\right) - w_{DL} \cdot 1 \text{ ft} = 532 \text{ lbf}$$

$$P_{Max2ftC} := \min\left(\frac{M_{MaxSA}}{2 \text{ ft}}, V_{MaxSA}\right) - w_{DL} \cdot 2 \text{ ft} = 264 \text{ lbf}$$

$$P_{Max3ftC} := \min\left(\frac{M_{MaxSA}}{3 \text{ ft}}, V_{MaxSA}\right) - w_{DL} \cdot 3 \text{ ft} = 174 \text{ lbf}$$

$$P_{Max4ftC} := \min\left(\frac{M_{MaxSA}}{4 \text{ ft}}, V_{MaxSA}\right) - w_{DL} \cdot 4 \text{ ft} = 129 \text{ lbf}$$

$$P_{Max5ftC} := \min\left(\frac{M_{MaxSA}}{5 \text{ ft}}, V_{MaxSA}\right) - w_{DL} \cdot 5 \text{ ft} = 101 \text{ lbf}$$

$$P_{Max6ftC} := \min\left(\frac{M_{MaxSA}}{6 \text{ ft}}, V_{MaxSA}\right) - w_{DL} \cdot 6 \text{ ft} = 82 \text{ lbf}$$

$$P_{Max7ftC} := \min\left(\frac{M_{MaxSA}}{7 \text{ ft}}, V_{MaxSA}\right) - w_{DL} \cdot 7 \text{ ft} = 69 \text{ lbf}$$

Max Distributed Load For Deflection - Strong Axis:

$$w_{1ftCD} := \frac{\frac{2 \cdot 1 \text{ ft}}{60} \cdot 8 \cdot E \cdot I_x}{(1 \text{ ft})^4} = 24296.1 \text{ plf}$$

$$w_{2ftCD} := \frac{\frac{2 \cdot 2 \text{ ft}}{60} \cdot 8 \cdot E \cdot I_x}{(2 \text{ ft})^4} = 3037.0 \text{ plf}$$

$$w_{3ftCD} := \frac{\frac{2 \cdot 3 \text{ ft}}{60} \cdot 8 \cdot E \cdot I_x}{(3 \text{ ft})^4} = 899.9 \text{ plf}$$

$$w_{4ftCD} := \frac{\frac{2 \cdot 4 \text{ ft}}{60} \cdot 8 \cdot E \cdot I_x}{(4 \text{ ft})^4} = 379.6 \text{ plf}$$

$$w_{5ftCD} := \frac{\frac{2 \cdot 5 \text{ ft}}{60} \cdot 8 \cdot E \cdot I_x}{(5 \text{ ft})^4} = 194.4 \text{ plf}$$

$$w_{6ftCD} := \frac{\frac{2 \cdot 6 \text{ ft}}{60} \cdot 8 \cdot E \cdot I_x}{(6 \text{ ft})^4} = 112.5 \text{ plf}$$

$$w_{7ftCD} := \frac{\frac{2 \cdot 7 \text{ ft}}{60} \cdot 8 \cdot E \cdot I_x}{(7 \text{ ft})^4} = 70.8 \text{ plf}$$

Max Point Load For Deflection - Strong Axis:

$$P_{Max1ftCD} := \frac{\frac{2 \cdot 1 \text{ ft}}{60} \cdot 3 \cdot E \cdot I_x}{(1 \text{ ft})^3} = 9111.0 \text{ lbf}$$

$$P_{Max2ftCD} := \frac{\frac{2 \cdot 2 \text{ ft}}{60} \cdot 3 \cdot E \cdot I_x}{(2 \text{ ft})^3} = 2277.8 \text{ lbf}$$

$$P_{Max3ftCD} := \frac{\frac{2 \cdot 3 \text{ ft}}{60} \cdot 3 \cdot E \cdot I_x}{(3 \text{ ft})^3} = 1012.3 \text{ lbf}$$

$$P_{Max4ftCD} := \frac{\frac{2 \cdot 4 \text{ ft}}{60} \cdot 3 \cdot E \cdot I_x}{(4 \text{ ft})^3} = 569.4 \text{ lbf}$$

$$P_{Max5ftCD} := \frac{\frac{2 \cdot 5 \text{ ft}}{60} \cdot 3 \cdot E \cdot I_x}{(5 \text{ ft})^3} = 364.4 \text{ lbf}$$

$$P_{Max6ftCD} := \frac{\frac{2 \cdot 6 \text{ ft}}{60} \cdot 3 \cdot E \cdot I_x}{(6 \text{ ft})^3} = 253.1 \text{ lbf}$$

$$P_{Max7ftCD} := \frac{\frac{2 \cdot 7 \text{ ft}}{60} \cdot 3 \cdot E \cdot I_x}{(7 \text{ ft})^3} = 185.9 \text{ lbf}$$

Span Table Summary - Strong Axis 1x4WIDE:

	<u>Span</u>	<u>Max Distributed (plf)</u>	<u>Max Point</u>																															
SA1x4 :=	1 ft	$\frac{\min(w_{1ft}, w_{1ft\Delta})}{plf}$	$\min(P_{Max1ft}, P_{Max1ft\Delta})$	=																														
	2 ft	$\frac{\min(w_{2ft}, w_{2ft\Delta})}{plf}$	$\min(P_{Max2ft}, P_{Max2ft\Delta})$																															
	3 ft	$\frac{\min(w_{3ft}, w_{3ft\Delta})}{plf}$	$\min(P_{Max3ft}, P_{Max3ft\Delta})$																															
	4 ft	$\frac{\min(w_{4ft}, w_{4ft\Delta})}{plf}$	$\min(P_{Max4ft}, P_{Max4ft\Delta})$																															
	5 ft	$\frac{\min(w_{5ft}, w_{5ft\Delta})}{plf}$	$\min(P_{Max5ft}, P_{Max5ft\Delta})$																															
	6 ft	$\frac{\min(w_{6ft}, w_{6ft\Delta})}{plf}$	$\min(P_{Max6ft}, P_{Max6ft\Delta})$																															
	7 ft	$\frac{\min(w_{7ft}, w_{7ft\Delta})}{plf}$	$\min(P_{Max7ft}, P_{Max7ft\Delta})$																															
	8 ft	$\frac{\min(w_{8ft}, w_{8ft\Delta})}{plf}$	$\min(P_{Max8ft}, P_{Max8ft\Delta})$																															
	9 ft	$\frac{\min(w_{9ft}, w_{9ft\Delta})}{plf}$	$\min(P_{Max9ft}, P_{Max9ft\Delta})$																															
	10 ft	$\frac{\min(w_{10ft}, w_{10ft\Delta})}{plf}$	$\min(P_{Max10ft}, P_{Max10ft\Delta})$																															
				<table><tr><td>1.0 ft</td><td>4263.0</td><td>2131.5 lbf</td></tr><tr><td>2.0 ft</td><td>1065.0</td><td>1065.0 lbf</td></tr><tr><td>3.0 ft</td><td>472.7</td><td>709.1 lbf</td></tr><tr><td>4.0 ft</td><td>265.4</td><td>530.9 lbf</td></tr><tr><td>5.0 ft</td><td>169.5</td><td>423.8 lbf</td></tr><tr><td>6.0 ft</td><td>117.4</td><td>352.2 lbf</td></tr><tr><td>7.0 ft</td><td>86.0</td><td>300.9 lbf</td></tr><tr><td>8.0 ft</td><td>65.6</td><td>262.3 lbf</td></tr><tr><td>9.0 ft</td><td>51.6</td><td>232.1 lbf</td></tr><tr><td>10.0 ft</td><td>41.6</td><td>207.9 lbf</td></tr></table>	1.0 ft	4263.0	2131.5 lbf	2.0 ft	1065.0	1065.0 lbf	3.0 ft	472.7	709.1 lbf	4.0 ft	265.4	530.9 lbf	5.0 ft	169.5	423.8 lbf	6.0 ft	117.4	352.2 lbf	7.0 ft	86.0	300.9 lbf	8.0 ft	65.6	262.3 lbf	9.0 ft	51.6	232.1 lbf	10.0 ft	41.6	207.9 lbf
1.0 ft	4263.0	2131.5 lbf																																
2.0 ft	1065.0	1065.0 lbf																																
3.0 ft	472.7	709.1 lbf																																
4.0 ft	265.4	530.9 lbf																																
5.0 ft	169.5	423.8 lbf																																
6.0 ft	117.4	352.2 lbf																																
7.0 ft	86.0	300.9 lbf																																
8.0 ft	65.6	262.3 lbf																																
9.0 ft	51.6	232.1 lbf																																
10.0 ft	41.6	207.9 lbf																																

	<u>Span</u>	<u>Max Distributed (plf)</u>	<u>Max Point</u>																						
SA1x4C:=	1 ft	$\frac{\min(w_{1ftC}, w_{1ftCD})}{plf}$	$\min(P_{Max1ftC}, P_{Max1ftCD})$	=																					
	2 ft	$\frac{\min(w_{2ftC}, w_{2ftCD})}{plf}$	$\min(P_{Max2ftC}, P_{Max2ftCD})$																						
	3 ft	$\frac{\min(w_{3ftC}, w_{3ftCD})}{plf}$	$\min(P_{Max3ftC}, P_{Max3ftCD})$																						
	4 ft	$\frac{\min(w_{4ftC}, w_{4ftCD})}{plf}$	$\min(P_{Max4ftC}, P_{Max4ftCD})$																						
	5 ft	$\frac{\min(w_{5ftC}, w_{5ftCD})}{plf}$	$\min(P_{Max5ftC}, P_{Max5ftCD})$																						
	6 ft	$\frac{\min(w_{6ftC}, w_{6ftCD})}{plf}$	$\min(P_{Max6ftC}, P_{Max6ftCD})$																						
	7 ft	$\frac{\min(w_{7ftC}, w_{7ftCD})}{plf}$	$\min(P_{Max7ftC}, P_{Max7ftCD})$																						
				<table><tr><td>1.0 ft</td><td>1065.0</td><td>531.9 lbf</td></tr><tr><td>2.0 ft</td><td>265.4</td><td>264.4 lbf</td></tr><tr><td>3.0 ft</td><td>117.4</td><td>174.5 lbf</td></tr><tr><td>4.0 ft</td><td>65.6</td><td>129.0 lbf</td></tr><tr><td>5.0 ft</td><td>41.6</td><td>101.3 lbf</td></tr><tr><td>6.0 ft</td><td>28.6</td><td>82.5 lbf</td></tr><tr><td>7.0 ft</td><td>20.7</td><td>68.7 lbf</td></tr></table>	1.0 ft	1065.0	531.9 lbf	2.0 ft	265.4	264.4 lbf	3.0 ft	117.4	174.5 lbf	4.0 ft	65.6	129.0 lbf	5.0 ft	41.6	101.3 lbf	6.0 ft	28.6	82.5 lbf	7.0 ft	20.7	68.7 lbf
1.0 ft	1065.0	531.9 lbf																							
2.0 ft	265.4	264.4 lbf																							
3.0 ft	117.4	174.5 lbf																							
4.0 ft	65.6	129.0 lbf																							
5.0 ft	41.6	101.3 lbf																							
6.0 ft	28.6	82.5 lbf																							
7.0 ft	20.7	68.7 lbf																							

Check 1x4WIDE Batten (KEB10025FWIDE/KEB2525MV2 - 6063-T5) - Weak Axis:

$$d_b := 100 \text{ mm} = 3.9 \text{ in} \quad \text{Depth of Member} \quad s_b := 25 \text{ mm} = 1.0 \text{ in} \quad \text{Width of Member}$$

$$w_{DL} := w_{selfB10025W} = 1.06 \text{ plf} \quad \text{Self Weight of Member} \quad I_y := I_{yB10025W} = 0.126 \text{ in}^4$$

Max allowable moments and shear considering batten simply supported between 2 supports. Note, dead load does not cause bending in this orientation.

Maximum Allowable Batten Moment:

Strong axis bending:

$$F_{ab6063T5} = 9.7 \text{ ksi}$$

Max Allowable Bending Stress per ADM

$$M_{MaxWA} := F_{ab6063T5} \cdot S_{yB10025W} = 2.35 \text{ kip} \cdot \text{in}$$

Max Moment Allowed for Batten - Weak Axis Bending

Maximum Allowable Batten Shear:

$$F_{av1x4} = 5.2 \text{ ksi}$$

Max Allowable Shear Stress per ADM

$$V_{MaxWA} := F_{av1x4} \cdot 2 \cdot A_{webB10025Wx} = 0.60 \text{ kip}$$

Max Shear Allowed for Batten - Weak Axis

Maximum Allowable Design Pressures For Different Spans:

Maximum Allowable Loads for Simply Supported Battens:

Max Distributed Load Weak Axis:**Max Point Loads Weak Axis:**

$$w_{1ft} := \min \left(\frac{M_{MaxWA} \cdot 8}{(1 \text{ ft})^2}, \frac{2 \cdot V_{MaxWA}}{1 \text{ ft}} \right) - w_{DL} = 1204.9 \text{ plf} \quad P_{Max1ft} := \min \left(\frac{\left(M_{MaxWA} - \frac{w_{DL} \cdot (1 \text{ ft})^2}{8} \right) \cdot 4}{1 \text{ ft}}, V_{MaxWA} \right) = 603 \text{ lbf}$$

$$w_{2ft} := \min \left(\frac{M_{MaxWA} \cdot 8}{(2 \text{ ft})^2}, \frac{2 \cdot V_{MaxWA}}{2 \text{ ft}} \right) - w_{DL} = 391.0 \text{ plf} \quad P_{Max2ft} := \min \left(\frac{\left(M_{MaxWA} - \frac{w_{DL} \cdot (2 \text{ ft})^2}{8} \right) \cdot 4}{2 \text{ ft}}, V_{MaxWA} \right) = 391 \text{ lbf}$$

$$w_{3ft} := \min \left(\frac{M_{MaxWA} \cdot 8}{(3 \text{ ft})^2}, \frac{2 \cdot V_{MaxWA}}{3 \text{ ft}} \right) - w_{DL} = 173.2 \text{ plf} \quad P_{Max3ft} := \min \left(\frac{\left(M_{MaxWA} - \frac{w_{DL} \cdot (3 \text{ ft})^2}{8} \right) \cdot 4}{3 \text{ ft}}, V_{MaxWA} \right) = 260 \text{ lbf}$$

$$w_{4ft} := \min \left(\frac{M_{MaxWA} \cdot 8}{(4 \text{ ft})^2}, \frac{2 \cdot V_{MaxWA}}{4 \text{ ft}} \right) - w_{DL} = 97.0 \text{ plf} \quad P_{Max4ft} := \min \left(\frac{\left(M_{MaxWA} - \frac{w_{DL} \cdot (4 \text{ ft})^2}{8} \right) \cdot 4}{4 \text{ ft}}, V_{MaxWA} \right) = 194 \text{ lbf}$$

$$w_{5ft} := \min \left(\frac{M_{MaxWA} \cdot 8}{(5 \text{ ft})^2}, \frac{2 \cdot V_{MaxWA}}{5 \text{ ft}} \right) - w_{DL} = 61.7 \text{ plf} \quad P_{Max5ft} := \min \left(\frac{\left(M_{MaxWA} - \frac{w_{DL} \cdot (5 \text{ ft})^2}{8} \right) \cdot 4}{5 \text{ ft}}, V_{MaxWA} \right) = 154 \text{ lbf}$$

$$w_{6ft} := \min \left(\frac{M_{MaxWA} \cdot 8}{(6 \text{ ft})^2}, \frac{2 \cdot V_{MaxWA}}{6 \text{ ft}} \right) - w_{DL} = 42.5 \text{ plf} \quad P_{Max6ft} := \min \left(\frac{\left(M_{MaxWA} - \frac{w_{DL} \cdot (6 \text{ ft})^2}{8} \right) \cdot 4}{6 \text{ ft}}, V_{MaxWA} \right) = 128 \text{ lbf}$$

$$w_{7ft} := \min \left(\frac{M_{MaxWA} \cdot 8}{(7 \text{ ft})^2}, \frac{2 \cdot V_{MaxWA}}{7 \text{ ft}} \right) - w_{DL} = 30.9 \text{ plf} \quad P_{Max7ft} := \min \left(\frac{\left(M_{MaxWA} - \frac{w_{DL} \cdot (7 \text{ ft})^2}{8} \right) \cdot 4}{7 \text{ ft}}, V_{MaxWA} \right) = 108 \text{ lbf}$$

$$w_{8ft} := \min \left(\frac{M_{MaxWA} \cdot 8}{(8 \text{ ft})^2}, \frac{2 \cdot V_{MaxWA}}{8 \text{ ft}} \right) - w_{DL} = 23.4 \text{ plf} \quad P_{Max8ft} := \min \left(\frac{\left(M_{MaxWA} - \frac{w_{DL} \cdot (8 \text{ ft})^2}{8} \right) \cdot 4}{8 \text{ ft}}, V_{MaxWA} \right) = 94 \text{ lbf}$$

$$w_{9ft} := \min \left(\frac{M_{MaxWA} \cdot 8}{(9 \text{ ft})^2}, \frac{2 \cdot V_{MaxWA}}{9 \text{ ft}} \right) - w_{DL} = 18.3 \text{ plf} \quad P_{Max9ft} := \min \left(\frac{\left(M_{MaxWA} - \frac{w_{DL} \cdot (9 \text{ ft})^2}{8} \right) \cdot 4}{9 \text{ ft}}, V_{MaxWA} \right) = 82 \text{ lbf}$$

$$w_{10ft} := \min \left(\frac{M_{MaxWA} \cdot 8}{(10 \text{ ft})^2}, \frac{2 \cdot V_{MaxWA}}{10 \text{ ft}} \right) - w_{DL} = 14.6 \text{ plf} \quad P_{Max10ft} := \min \left(\frac{\left(M_{MaxWA} - \frac{w_{DL} \cdot (10 \text{ ft})^2}{8} \right) \cdot 4}{10 \text{ ft}}, V_{MaxWA} \right) = 73 \text{ lbf}$$

Max Distributed Load For Deflection - Weak Axis:

$$w_{1ft\Delta} := \frac{\frac{1 \text{ ft}}{60} \cdot 384 \cdot E \cdot I_y}{5 \cdot (1 \text{ ft})^4} = 11321.0 \text{ plf}$$

$$w_{2ft\Delta} := \frac{\frac{2 \text{ ft}}{60} \cdot 384 \cdot E \cdot I_y}{5 \cdot (2 \text{ ft})^4} = 1415.1 \text{ plf}$$

$$w_{3ft\Delta} := \frac{\frac{3 \text{ ft}}{60} \cdot 384 \cdot E \cdot I_y}{5 \cdot (3 \text{ ft})^4} = 419.3 \text{ plf}$$

$$w_{4ft\Delta} := \frac{\frac{4 \text{ ft}}{60} \cdot 384 \cdot E \cdot I_y}{5 \cdot (4 \text{ ft})^4} = 176.9 \text{ plf}$$

$$w_{5ft\Delta} := \frac{\frac{5 \text{ ft}}{60} \cdot 384 \cdot E \cdot I_y}{5 \cdot (5 \text{ ft})^4} = 90.6 \text{ plf}$$

$$w_{6ft\Delta} := \frac{\frac{6 \text{ ft}}{60} \cdot 384 \cdot E \cdot I_y}{5 \cdot (6 \text{ ft})^4} = 52.4 \text{ plf}$$

$$w_{7ft\Delta} := \frac{\frac{7 \text{ ft}}{60} \cdot 384 \cdot E \cdot I_y}{5 \cdot (7 \text{ ft})^4} = 33.0 \text{ plf}$$

$$w_{8ft\Delta} := \frac{\frac{8 \text{ ft}}{60} \cdot 384 \cdot E \cdot I_y}{5 \cdot (8 \text{ ft})^4} = 22.1 \text{ plf}$$

$$w_{9ft\Delta} := \frac{\frac{9 \text{ ft}}{60} \cdot 384 \cdot E \cdot I_y}{5 \cdot (9 \text{ ft})^4} = 15.5 \text{ plf}$$

$$w_{10ft\Delta} := \frac{\frac{10 \text{ ft}}{60} \cdot 384 \cdot E \cdot I_y}{5 \cdot (10 \text{ ft})^4} = 11.3 \text{ plf}$$

Max Point Load For Deflection - Weak Axis:

$$P_{Max1ft\Delta} := \frac{\frac{1 \text{ ft}}{60} \cdot 48 \cdot E \cdot I_y}{(1 \text{ ft})^3} = 7075.6 \text{ lbf}$$

$$P_{Max2ft\Delta} := \frac{\frac{2 \text{ ft}}{60} \cdot 48 \cdot E \cdot I_y}{(2 \text{ ft})^3} = 1768.9 \text{ lbf}$$

$$P_{Max3ft\Delta} := \frac{\frac{3 \text{ ft}}{60} \cdot 48 \cdot E \cdot I_y}{(3 \text{ ft})^3} = 786.2 \text{ lbf}$$

$$P_{Max4ft\Delta} := \frac{\frac{4 \text{ ft}}{60} \cdot 48 \cdot E \cdot I_y}{(4 \text{ ft})^3} = 442.2 \text{ lbf}$$

$$P_{Max5ft\Delta} := \frac{\frac{5 \text{ ft}}{60} \cdot 48 \cdot E \cdot I_y}{(5 \text{ ft})^3} = 283.0 \text{ lbf}$$

$$P_{Max6ft\Delta} := \frac{\frac{6 \text{ ft}}{60} \cdot 48 \cdot E \cdot I_y}{(6 \text{ ft})^3} = 196.5 \text{ lbf}$$

$$P_{Max7ft\Delta} := \frac{\frac{7 \text{ ft}}{60} \cdot 48 \cdot E \cdot I_y}{(7 \text{ ft})^3} = 144.4 \text{ lbf}$$

$$P_{Max8ft\Delta} := \frac{\frac{8 \text{ ft}}{60} \cdot 48 \cdot E \cdot I_y}{(8 \text{ ft})^3} = 110.6 \text{ lbf}$$

$$P_{Max9ft\Delta} := \frac{\frac{9 \text{ ft}}{60} \cdot 48 \cdot E \cdot I_y}{(9 \text{ ft})^3} = 87.4 \text{ lbf}$$

$$P_{Max10ft\Delta} := \frac{\frac{10 \text{ ft}}{60} \cdot 48 \cdot E \cdot I_y}{(10 \text{ ft})^3} = 70.8 \text{ lbf}$$

Maximum Allowable Design Pressures For Cantilevered Battens:

Maximum Allowable Loads for Cantilevered Battens:

Max Distributed Load Weak Axis:

$$w_{1ftC} := \min\left(\frac{M_{MaxWA} \cdot 2}{(1 \text{ ft})^2}, \frac{V_{MaxWA}}{1 \text{ ft}}\right) - w_{DL} = 391.0 \text{ plf}$$

$$w_{2ftC} := \min\left(\frac{M_{MaxWA} \cdot 2}{(2 \text{ ft})^2}, \frac{V_{MaxWA}}{2 \text{ ft}}\right) - w_{DL} = 97.0 \text{ plf}$$

$$w_{3ftC} := \min\left(\frac{M_{MaxWA} \cdot 2}{(3 \text{ ft})^2}, \frac{V_{MaxWA}}{3 \text{ ft}}\right) - w_{DL} = 42.5 \text{ plf}$$

$$w_{4ftC} := \min\left(\frac{M_{MaxWA} \cdot 2}{(4 \text{ ft})^2}, \frac{V_{MaxWA}}{4 \text{ ft}}\right) - w_{DL} = 23.4 \text{ plf}$$

$$w_{5ftC} := \min\left(\frac{M_{MaxWA} \cdot 2}{(5 \text{ ft})^2}, \frac{V_{MaxWA}}{5 \text{ ft}}\right) - w_{DL} = 14.6 \text{ plf}$$

$$w_{6ftC} := \min\left(\frac{M_{MaxWA} \cdot 2}{(6 \text{ ft})^2}, \frac{V_{MaxWA}}{6 \text{ ft}}\right) - w_{DL} = 9.8 \text{ plf}$$

$$w_{7ftC} := \min\left(\frac{M_{MaxWA} \cdot 2}{(7 \text{ ft})^2}, \frac{V_{MaxWA}}{7 \text{ ft}}\right) - w_{DL} = 6.9 \text{ plf}$$

Max Point Loads Weak Axis:

$$P_{Max1ftC} := \min\left(\frac{M_{MaxWA}}{1 \text{ ft}}, V_{MaxWA}\right) - w_{DL} \cdot 1 \text{ ft} = 195 \text{ lbf}$$

$$P_{Max2ftC} := \min\left(\frac{M_{MaxWA}}{2 \text{ ft}}, V_{MaxWA}\right) - w_{DL} \cdot 2 \text{ ft} = 96 \text{ lbf}$$

$$P_{Max3ftC} := \min\left(\frac{M_{MaxWA}}{3 \text{ ft}}, V_{MaxWA}\right) - w_{DL} \cdot 3 \text{ ft} = 62 \text{ lbf}$$

$$P_{Max4ftC} := \min\left(\frac{M_{MaxWA}}{4 \text{ ft}}, V_{MaxWA}\right) - w_{DL} \cdot 4 \text{ ft} = 45 \text{ lbf}$$

$$P_{Max5ftC} := \min\left(\frac{M_{MaxWA}}{5 \text{ ft}}, V_{MaxWA}\right) - w_{DL} \cdot 5 \text{ ft} = 34 \text{ lbf}$$

$$P_{Max6ftC} := \min\left(\frac{M_{MaxWA}}{6 \text{ ft}}, V_{MaxWA}\right) - w_{DL} \cdot 6 \text{ ft} = 26 \text{ lbf}$$

$$P_{Max7ftC} := \min\left(\frac{M_{MaxWA}}{7 \text{ ft}}, V_{MaxWA}\right) - w_{DL} \cdot 7 \text{ ft} = 21 \text{ lbf}$$

Max Distributed Load For Deflection - Weak Axis:

$$w_{1ftCD} := \frac{\frac{2 \cdot 1 \text{ ft}}{60} \cdot 8 \cdot E \cdot I_y}{(1 \text{ ft})^4} = 2358.5 \text{ plf}$$

$$w_{2ftCD} := \frac{\frac{2 \cdot 2 \text{ ft}}{60} \cdot 8 \cdot E \cdot I_y}{(2 \text{ ft})^4} = 294.8 \text{ plf}$$

$$w_{3ftCD} := \frac{\frac{2 \cdot 3 \text{ ft}}{60} \cdot 8 \cdot E \cdot I_y}{(3 \text{ ft})^4} = 87.4 \text{ plf}$$

$$w_{4ftCD} := \frac{\frac{2 \cdot 4 \text{ ft}}{60} \cdot 8 \cdot E \cdot I_y}{(4 \text{ ft})^4} = 36.9 \text{ plf}$$

$$w_{5ftCD} := \frac{\frac{2 \cdot 5 \text{ ft}}{60} \cdot 8 \cdot E \cdot I_y}{(5 \text{ ft})^4} = 18.9 \text{ plf}$$

$$w_{6ftCD} := \frac{\frac{2 \cdot 6 \text{ ft}}{60} \cdot 8 \cdot E \cdot I_y}{(6 \text{ ft})^4} = 10.9 \text{ plf}$$

$$w_{7ftCD} := \frac{\frac{2 \cdot 7 \text{ ft}}{60} \cdot 8 \cdot E \cdot I_y}{(7 \text{ ft})^4} = 6.9 \text{ plf}$$

Max Point Load For Deflection - Weak Axis:

$$P_{Max1ftCD} := \frac{\frac{2 \cdot 1 \text{ ft}}{60} \cdot 3 \cdot E \cdot I_y}{(1 \text{ ft})^3} = 884.5 \text{ lbf}$$

$$P_{Max2ftCD} := \frac{\frac{2 \cdot 2 \text{ ft}}{60} \cdot 3 \cdot E \cdot I_y}{(2 \text{ ft})^3} = 221.1 \text{ lbf}$$

$$P_{Max3ftCD} := \frac{\frac{2 \cdot 3 \text{ ft}}{60} \cdot 3 \cdot E \cdot I_y}{(3 \text{ ft})^3} = 98.3 \text{ lbf}$$

$$P_{Max4ftCD} := \frac{\frac{2 \cdot 4 \text{ ft}}{60} \cdot 3 \cdot E \cdot I_y}{(4 \text{ ft})^3} = 55.3 \text{ lbf}$$

$$P_{Max5ftCD} := \frac{\frac{2 \cdot 5 \text{ ft}}{60} \cdot 3 \cdot E \cdot I_y}{(5 \text{ ft})^3} = 35.4 \text{ lbf}$$

$$P_{Max6ftCD} := \frac{\frac{2 \cdot 6 \text{ ft}}{60} \cdot 3 \cdot E \cdot I_y}{(6 \text{ ft})^3} = 24.6 \text{ lbf}$$

$$P_{Max7ftCD} := \frac{\frac{2 \cdot 7 \text{ ft}}{60} \cdot 3 \cdot E \cdot I_y}{(7 \text{ ft})^3} = 18.1 \text{ lbf}$$

Span Table Summary - Weak Axis 1x4WIDE:

Span	Max Distributed (plf)	Max Point	
1 ft	$\frac{\min(w_{1ft}, w_{1ft\Delta})}{plf}$	$\min(P_{Max1ft}, P_{Max1ft\Delta})$	
2 ft	$\frac{\min(w_{2ft}, w_{2ft\Delta})}{plf}$	$\min(P_{Max2ft}, P_{Max2ft\Delta})$	
3 ft	$\frac{\min(w_{3ft}, w_{3ft\Delta})}{plf}$	$\min(P_{Max3ft}, P_{Max3ft\Delta})$	
4 ft	$\frac{\min(w_{4ft}, w_{4ft\Delta})}{plf}$	$\min(P_{Max4ft}, P_{Max4ft\Delta})$	
5 ft	$\frac{\min(w_{5ft}, w_{5ft\Delta})}{plf}$	$\min(P_{Max5ft}, P_{Max5ft\Delta})$	
6 ft	$\frac{\min(w_{6ft}, w_{6ft\Delta})}{plf}$	$\min(P_{Max6ft}, P_{Max6ft\Delta})$	
7 ft	$\frac{\min(w_{7ft}, w_{7ft\Delta})}{plf}$	$\min(P_{Max7ft}, P_{Max7ft\Delta})$	
8 ft	$\frac{\min(w_{8ft}, w_{8ft\Delta})}{plf}$	$\min(P_{Max8ft}, P_{Max8ft\Delta})$	
9 ft	$\frac{\min(w_{9ft}, w_{9ft\Delta})}{plf}$	$\min(P_{Max9ft}, P_{Max9ft\Delta})$	
10 ft	$\frac{\min(w_{10ft}, w_{10ft\Delta})}{plf}$	$\min(P_{Max10ft}, P_{Max10ft\Delta})$	

WA1x4 :=

1.0 ft	1204.9	603.0 lbf
2.0 ft	391.0	391.0 lbf
3.0 ft	173.2	259.8 lbf
4.0 ft	97.0	193.9 lbf
5.0 ft	61.7	154.2 lbf
6.0 ft	42.5	127.5 lbf
7.0 ft	30.9	108.3 lbf
8.0 ft	22.1	93.8 lbf
9.0 ft	15.5	82.4 lbf
10.0 ft	11.3	70.8 lbf

Span	Max Distributed (plf)	Max Point	
1 ft	$\frac{\min(w_{1ftC}, w_{1ftC\Delta})}{plf}$	$\min(P_{Max1ftC}, P_{Max1ftC\Delta})$	
2 ft	$\frac{\min(w_{2ftC}, w_{2ftC\Delta})}{plf}$	$\min(P_{Max2ftC}, P_{Max2ftC\Delta})$	
3 ft	$\frac{\min(w_{3ftC}, w_{3ftC\Delta})}{plf}$	$\min(P_{Max3ftC}, P_{Max3ftC\Delta})$	
4 ft	$\frac{\min(w_{4ftC}, w_{4ftC\Delta})}{plf}$	$\min(P_{Max4ftC}, P_{Max4ftC\Delta})$	
5 ft	$\frac{\min(w_{5ftC}, w_{5ftC\Delta})}{plf}$	$\min(P_{Max5ftC}, P_{Max5ftC\Delta})$	
6 ft	$\frac{\min(w_{6ftC}, w_{6ftC\Delta})}{plf}$	$\min(P_{Max6ftC}, P_{Max6ftC\Delta})$	
7 ft	$\frac{\min(w_{7ftC}, w_{7ftC\Delta})}{plf}$	$\min(P_{Max7ftC}, P_{Max7ftC\Delta})$	

WA1x4C :=

1.0 ft	391.0	195.0 lbf
2.0 ft	97.0	95.9 lbf
3.0 ft	42.5	62.2 lbf
4.0 ft	23.4	44.8 lbf
5.0 ft	14.6	33.9 lbf
6.0 ft	9.8	24.6 lbf
7.0 ft	6.9	18.1 lbf

Check 1x6WIDE Batten (KEB15025FWIDE/KEB2525MV2 - 6063-T5) - Strong Axis:

$$d_b := 150 \text{ mm} = 5.9 \text{ in} \quad \text{Depth of Member} \quad s_b := 25 \text{ mm} = 1.0 \text{ in} \quad \text{Width of Member}$$

$$w_{DL} := w_{selfB15025W} = 1.67 \text{ plf} \quad \text{Self Weight of Member} \quad I_x := I_{xB15025W} = 4.510 \text{ in}^4$$

Max allowable moments and shear considering batten simply supported between 2 supports. Note, dead load does not cause bending in this orientation.

Maximum Allowable Batten Moment:

Strong axis bending:

$$F_{ab6063T5} = 9.7 \text{ ksi}$$

Max Allowable Bending Stress per ADM

$$M_{MaxSA} := F_{ab6063T5} \cdot S_{xB15025W} = 14.83 \text{ kip} \cdot \text{in}$$

Max Moment Allowed for Batten - Strong Axis Bending

Maximum Allowable Batten Shear:

$$F_{av1x6} = 4.0 \text{ ksi}$$

Max Allowable Shear Stress per ADM

$$V_{MaxSA} := F_{av1x6} \cdot 2 \cdot A_{webB15025Wy} = 3.31 \text{ kip}$$

Max Shear Allowed for Batten - Strong Axis

Maximum Allowable Design Pressures For Different Spans:

Maximum Allowable Loads for Simply Supported Battens:

Max Distributed Load Strong Axis:**Max Point Loads Strong Axis:**

$$w_{1ft} := \min \left(\frac{M_{MaxSA} \cdot 8}{(1 \text{ ft})^2}, \frac{2 \cdot V_{MaxSA}}{1 \text{ ft}} \right) - w_{DL} = 6625.0 \text{ plf} \quad P_{Max1ft} := \min \left(\frac{\left(M_{MaxSA} - \frac{w_{DL} \cdot (1 \text{ ft})^2}{8} \right) \cdot 4}{1 \text{ ft}}, V_{MaxSA} \right) = 3313 \text{ lbf}$$

$$w_{2ft} := \min \left(\frac{M_{MaxSA} \cdot 8}{(2 \text{ ft})^2}, \frac{2 \cdot V_{MaxSA}}{2 \text{ ft}} \right) - w_{DL} = 2469.9 \text{ plf} \quad P_{Max2ft} := \min \left(\frac{\left(M_{MaxSA} - \frac{w_{DL} \cdot (2 \text{ ft})^2}{8} \right) \cdot 4}{2 \text{ ft}}, V_{MaxSA} \right) = 2470 \text{ lbf}$$

$$w_{3ft} := \min \left(\frac{M_{MaxSA} \cdot 8}{(3 \text{ ft})^2}, \frac{2 \cdot V_{MaxSA}}{3 \text{ ft}} \right) - w_{DL} = 1096.8 \text{ plf} \quad P_{Max3ft} := \min \left(\frac{\left(M_{MaxSA} - \frac{w_{DL} \cdot (3 \text{ ft})^2}{8} \right) \cdot 4}{3 \text{ ft}}, V_{MaxSA} \right) = 1645 \text{ lbf}$$

$$w_{4ft} := \min \left(\frac{M_{MaxSA} \cdot 8}{(4 \text{ ft})^2}, \frac{2 \cdot V_{MaxSA}}{4 \text{ ft}} \right) - w_{DL} = 616.2 \text{ plf} \quad P_{Max4ft} := \min \left(\frac{\left(M_{MaxSA} - \frac{w_{DL} \cdot (4 \text{ ft})^2}{8} \right) \cdot 4}{4 \text{ ft}}, V_{MaxSA} \right) = 1232 \text{ lbf}$$

$$w_{5ft} := \min \left(\frac{M_{MaxSA} \cdot 8}{(5 \text{ ft})^2}, \frac{2 \cdot V_{MaxSA}}{5 \text{ ft}} \right) - w_{DL} = 393.8 \text{ plf} \quad P_{Max5ft} := \min \left(\frac{\left(M_{MaxSA} - \frac{w_{DL} \cdot (5 \text{ ft})^2}{8} \right) \cdot 4}{5 \text{ ft}}, V_{MaxSA} \right) = 984 \text{ lbf}$$

$$w_{6ft} := \min \left(\frac{M_{MaxSA} \cdot 8}{(6 \text{ ft})^2}, \frac{2 \cdot V_{MaxSA}}{6 \text{ ft}} \right) - w_{DL} = 272.9 \text{ plf} \quad P_{Max6ft} := \min \left(\frac{\left(M_{MaxSA} - \frac{w_{DL} \cdot (6 \text{ ft})^2}{8} \right) \cdot 4}{6 \text{ ft}}, V_{MaxSA} \right) = 819 \text{ lbf}$$

$$w_{7ft} := \min \left(\frac{M_{MaxSA} \cdot 8}{(7 \text{ ft})^2}, \frac{2 \cdot V_{MaxSA}}{7 \text{ ft}} \right) - w_{DL} = 200.1 \text{ plf} \quad P_{Max7ft} := \min \left(\frac{\left(M_{MaxSA} - \frac{w_{DL} \cdot (7 \text{ ft})^2}{8} \right) \cdot 4}{7 \text{ ft}}, V_{MaxSA} \right) = 700 \text{ lbf}$$

$$w_{8ft} := \min \left(\frac{M_{MaxSA} \cdot 8}{(8 \text{ ft})^2}, \frac{2 \cdot V_{MaxSA}}{8 \text{ ft}} \right) - w_{DL} = 152.8 \text{ plf} \quad P_{Max8ft} := \min \left(\frac{\left(M_{MaxSA} - \frac{w_{DL} \cdot (8 \text{ ft})^2}{8} \right) \cdot 4}{8 \text{ ft}}, V_{MaxSA} \right) = 611 \text{ lbf}$$

$$w_{9ft} := \min \left(\frac{M_{MaxSA} \cdot 8}{(9 \text{ ft})^2}, \frac{2 \cdot V_{MaxSA}}{9 \text{ ft}} \right) - w_{DL} = 120.4 \text{ plf} \quad P_{Max9ft} := \min \left(\frac{\left(M_{MaxSA} - \frac{w_{DL} \cdot (9 \text{ ft})^2}{8} \right) \cdot 4}{9 \text{ ft}}, V_{MaxSA} \right) = 542 \text{ lbf}$$

$$w_{10ft} := \min \left(\frac{M_{MaxSA} \cdot 8}{(10 \text{ ft})^2}, \frac{2 \cdot V_{MaxSA}}{10 \text{ ft}} \right) - w_{DL} = 97.2 \text{ plf} \quad P_{Max10ft} := \min \left(\frac{\left(M_{MaxSA} - \frac{w_{DL} \cdot (10 \text{ ft})^2}{8} \right) \cdot 4}{10 \text{ ft}}, V_{MaxSA} \right) = 486 \text{ lbf}$$

Max Distributed Load For Deflection - Strong Axis:

$$w_{1ft\Delta} := \frac{\frac{1 \text{ ft}}{60} \cdot 384 \cdot E \cdot I_x}{5 \cdot (1 \text{ ft})^4} = 404888.8 \text{ plf}$$

$$w_{2ft\Delta} := \frac{\frac{2 \text{ ft}}{60} \cdot 384 \cdot E \cdot I_x}{5 \cdot (2 \text{ ft})^4} = 50611.1 \text{ plf}$$

$$w_{3ft\Delta} := \frac{\frac{3 \text{ ft}}{60} \cdot 384 \cdot E \cdot I_x}{5 \cdot (3 \text{ ft})^4} = 14995.9 \text{ plf}$$

$$w_{4ft\Delta} := \frac{\frac{4 \text{ ft}}{60} \cdot 384 \cdot E \cdot I_x}{5 \cdot (4 \text{ ft})^4} = 6326.4 \text{ plf}$$

$$w_{5ft\Delta} := \frac{\frac{5 \text{ ft}}{60} \cdot 384 \cdot E \cdot I_x}{5 \cdot (5 \text{ ft})^4} = 3239.1 \text{ plf}$$

$$w_{6ft\Delta} := \frac{\frac{6 \text{ ft}}{60} \cdot 384 \cdot E \cdot I_x}{5 \cdot (6 \text{ ft})^4} = 1874.5 \text{ plf}$$

$$w_{7ft\Delta} := \frac{\frac{7 \text{ ft}}{60} \cdot 384 \cdot E \cdot I_x}{5 \cdot (7 \text{ ft})^4} = 1180.4 \text{ plf}$$

$$w_{8ft\Delta} := \frac{\frac{8 \text{ ft}}{60} \cdot 384 \cdot E \cdot I_x}{5 \cdot (8 \text{ ft})^4} = 790.8 \text{ plf}$$

$$w_{9ft\Delta} := \frac{\frac{9 \text{ ft}}{60} \cdot 384 \cdot E \cdot I_x}{5 \cdot (9 \text{ ft})^4} = 555.4 \text{ plf}$$

$$w_{10ft\Delta} := \frac{\frac{10 \text{ ft}}{60} \cdot 384 \cdot E \cdot I_x}{5 \cdot (10 \text{ ft})^4} = 404.9 \text{ plf}$$

Max Point Load For Deflection - Strong Axis:

$$P_{Max1ft\Delta} := \frac{\frac{1 \text{ ft}}{60} \cdot 48 \cdot E \cdot I_x}{(1 \text{ ft})^3} = 253055.5 \text{ lbf}$$

$$P_{Max2ft\Delta} := \frac{\frac{2 \text{ ft}}{60} \cdot 48 \cdot E \cdot I_x}{(2 \text{ ft})^3} = 63263.9 \text{ lbf}$$

$$P_{Max3ft\Delta} := \frac{\frac{3 \text{ ft}}{60} \cdot 48 \cdot E \cdot I_x}{(3 \text{ ft})^3} = 28117.3 \text{ lbf}$$

$$P_{Max4ft\Delta} := \frac{\frac{4 \text{ ft}}{60} \cdot 48 \cdot E \cdot I_x}{(4 \text{ ft})^3} = 15816.0 \text{ lbf}$$

$$P_{Max5ft\Delta} := \frac{\frac{5 \text{ ft}}{60} \cdot 48 \cdot E \cdot I_x}{(5 \text{ ft})^3} = 10122.2 \text{ lbf}$$

$$P_{Max6ft\Delta} := \frac{\frac{6 \text{ ft}}{60} \cdot 48 \cdot E \cdot I_x}{(6 \text{ ft})^3} = 7029.3 \text{ lbf}$$

$$P_{Max7ft\Delta} := \frac{\frac{7 \text{ ft}}{60} \cdot 48 \cdot E \cdot I_x}{(7 \text{ ft})^3} = 5164.4 \text{ lbf}$$

$$P_{Max8ft\Delta} := \frac{\frac{8 \text{ ft}}{60} \cdot 48 \cdot E \cdot I_x}{(8 \text{ ft})^3} = 3954.0 \text{ lbf}$$

$$P_{Max9ft\Delta} := \frac{\frac{9 \text{ ft}}{60} \cdot 48 \cdot E \cdot I_x}{(9 \text{ ft})^3} = 3124.1 \text{ lbf}$$

$$P_{Max10ft\Delta} := \frac{\frac{10 \text{ ft}}{60} \cdot 48 \cdot E \cdot I_x}{(10 \text{ ft})^3} = 2530.6 \text{ lbf}$$

Maximum Allowable Design Pressures For Cantilevered Battens:

Maximum Allowable Loads for Cantilevered Battens:

Max Distributed Load Strong Axis:

$$w_{1ftC} := \min\left(\frac{M_{MaxSA} \cdot 2}{(1 \text{ ft})^2}, \frac{V_{MaxSA}}{1 \text{ ft}}\right) - w_{DL} = 2469.9 \text{ plf}$$

$$w_{2ftC} := \min\left(\frac{M_{MaxSA} \cdot 2}{(2 \text{ ft})^2}, \frac{V_{MaxSA}}{2 \text{ ft}}\right) - w_{DL} = 616.2 \text{ plf}$$

$$w_{3ftC} := \min\left(\frac{M_{MaxSA} \cdot 2}{(3 \text{ ft})^2}, \frac{V_{MaxSA}}{3 \text{ ft}}\right) - w_{DL} = 272.9 \text{ plf}$$

$$w_{4ftC} := \min\left(\frac{M_{MaxSA} \cdot 2}{(4 \text{ ft})^2}, \frac{V_{MaxSA}}{4 \text{ ft}}\right) - w_{DL} = 152.8 \text{ plf}$$

$$w_{5ftC} := \min\left(\frac{M_{MaxSA} \cdot 2}{(5 \text{ ft})^2}, \frac{V_{MaxSA}}{5 \text{ ft}}\right) - w_{DL} = 97.2 \text{ plf}$$

$$w_{6ftC} := \min\left(\frac{M_{MaxSA} \cdot 2}{(6 \text{ ft})^2}, \frac{V_{MaxSA}}{6 \text{ ft}}\right) - w_{DL} = 67.0 \text{ plf}$$

$$w_{7ftC} := \min\left(\frac{M_{MaxSA} \cdot 2}{(7 \text{ ft})^2}, \frac{V_{MaxSA}}{7 \text{ ft}}\right) - w_{DL} = 48.8 \text{ plf}$$

Max Point Loads Strong Axis:

$$P_{Max1ftC} := \min\left(\frac{M_{MaxSA}}{1 \text{ ft}}, V_{MaxSA}\right) - w_{DL} \cdot 1 \text{ ft} = 1234 \text{ lbf}$$

$$P_{Max2ftC} := \min\left(\frac{M_{MaxSA}}{2 \text{ ft}}, V_{MaxSA}\right) - w_{DL} \cdot 2 \text{ ft} = 615 \text{ lbf}$$

$$P_{Max3ftC} := \min\left(\frac{M_{MaxSA}}{3 \text{ ft}}, V_{MaxSA}\right) - w_{DL} \cdot 3 \text{ ft} = 407 \text{ lbf}$$

$$P_{Max4ftC} := \min\left(\frac{M_{MaxSA}}{4 \text{ ft}}, V_{MaxSA}\right) - w_{DL} \cdot 4 \text{ ft} = 302 \text{ lbf}$$

$$P_{Max5ftC} := \min\left(\frac{M_{MaxSA}}{5 \text{ ft}}, V_{MaxSA}\right) - w_{DL} \cdot 5 \text{ ft} = 239 \text{ lbf}$$

$$P_{Max6ftC} := \min\left(\frac{M_{MaxSA}}{6 \text{ ft}}, V_{MaxSA}\right) - w_{DL} \cdot 6 \text{ ft} = 196 \text{ lbf}$$

$$P_{Max7ftC} := \min\left(\frac{M_{MaxSA}}{7 \text{ ft}}, V_{MaxSA}\right) - w_{DL} \cdot 7 \text{ ft} = 165 \text{ lbf}$$

Max Distributed Load For Deflection - Strong Axis:

$$w_{1ftCD} := \frac{\frac{2 \cdot 1 \text{ ft}}{60} \cdot 8 \cdot E \cdot I_x}{(1 \text{ ft})^4} = 84351.8 \text{ plf}$$

$$w_{2ftCD} := \frac{\frac{2 \cdot 2 \text{ ft}}{60} \cdot 8 \cdot E \cdot I_x}{(2 \text{ ft})^4} = 10544.0 \text{ plf}$$

$$w_{3ftCD} := \frac{\frac{2 \cdot 3 \text{ ft}}{60} \cdot 8 \cdot E \cdot I_x}{(3 \text{ ft})^4} = 3124.1 \text{ plf}$$

$$w_{4ftCD} := \frac{\frac{2 \cdot 4 \text{ ft}}{60} \cdot 8 \cdot E \cdot I_x}{(4 \text{ ft})^4} = 1318.0 \text{ plf}$$

$$w_{5ftCD} := \frac{\frac{2 \cdot 5 \text{ ft}}{60} \cdot 8 \cdot E \cdot I_x}{(5 \text{ ft})^4} = 674.8 \text{ plf}$$

$$w_{6ftCD} := \frac{\frac{2 \cdot 6 \text{ ft}}{60} \cdot 8 \cdot E \cdot I_x}{(6 \text{ ft})^4} = 390.5 \text{ plf}$$

$$w_{7ftCD} := \frac{\frac{2 \cdot 7 \text{ ft}}{60} \cdot 8 \cdot E \cdot I_x}{(7 \text{ ft})^4} = 245.9 \text{ plf}$$

Max Point Load For Deflection - Strong Axis:

$$P_{Max1ftCD} := \frac{\frac{2 \cdot 1 \text{ ft}}{60} \cdot 3 \cdot E \cdot I_x}{(1 \text{ ft})^3} = 31631.9 \text{ lbf}$$

$$P_{Max2ftCD} := \frac{\frac{2 \cdot 2 \text{ ft}}{60} \cdot 3 \cdot E \cdot I_x}{(2 \text{ ft})^3} = 7908.0 \text{ lbf}$$

$$P_{Max3ftCD} := \frac{\frac{2 \cdot 3 \text{ ft}}{60} \cdot 3 \cdot E \cdot I_x}{(3 \text{ ft})^3} = 3514.7 \text{ lbf}$$

$$P_{Max4ftCD} := \frac{\frac{2 \cdot 4 \text{ ft}}{60} \cdot 3 \cdot E \cdot I_x}{(4 \text{ ft})^3} = 1977.0 \text{ lbf}$$

$$P_{Max5ftCD} := \frac{\frac{2 \cdot 5 \text{ ft}}{60} \cdot 3 \cdot E \cdot I_x}{(5 \text{ ft})^3} = 1265.3 \text{ lbf}$$

$$P_{Max6ftCD} := \frac{\frac{2 \cdot 6 \text{ ft}}{60} \cdot 3 \cdot E \cdot I_x}{(6 \text{ ft})^3} = 878.7 \text{ lbf}$$

$$P_{Max7ftCD} := \frac{\frac{2 \cdot 7 \text{ ft}}{60} \cdot 3 \cdot E \cdot I_x}{(7 \text{ ft})^3} = 645.5 \text{ lbf}$$

Span Table Summary - Strong Axis 1x6WIDE:

	<u>Span</u>	<u>Max Distributed (plf)</u>	<u>Max Point</u>																															
SA1x6:=	1 ft	$\frac{\min(w_{1ft}, w_{1ft\Delta})}{plf}$	$\min(P_{Max1ft}, P_{Max1ft\Delta})$	=																														
	2 ft	$\frac{\min(w_{2ft}, w_{2ft\Delta})}{plf}$	$\min(P_{Max2ft}, P_{Max2ft\Delta})$																															
	3 ft	$\frac{\min(w_{3ft}, w_{3ft\Delta})}{plf}$	$\min(P_{Max3ft}, P_{Max3ft\Delta})$																															
	4 ft	$\frac{\min(w_{4ft}, w_{4ft\Delta})}{plf}$	$\min(P_{Max4ft}, P_{Max4ft\Delta})$																															
	5 ft	$\frac{\min(w_{5ft}, w_{5ft\Delta})}{plf}$	$\min(P_{Max5ft}, P_{Max5ft\Delta})$																															
	6 ft	$\frac{\min(w_{6ft}, w_{6ft\Delta})}{plf}$	$\min(P_{Max6ft}, P_{Max6ft\Delta})$																															
	7 ft	$\frac{\min(w_{7ft}, w_{7ft\Delta})}{plf}$	$\min(P_{Max7ft}, P_{Max7ft\Delta})$																															
	8 ft	$\frac{\min(w_{8ft}, w_{8ft\Delta})}{plf}$	$\min(P_{Max8ft}, P_{Max8ft\Delta})$																															
	9 ft	$\frac{\min(w_{9ft}, w_{9ft\Delta})}{plf}$	$\min(P_{Max9ft}, P_{Max9ft\Delta})$																															
	10 ft	$\frac{\min(w_{10ft}, w_{10ft\Delta})}{plf}$	$\min(P_{Max10ft}, P_{Max10ft\Delta})$																															
				<table><tr><td>1.0 ft</td><td>6625.0</td><td>3313.3 lbf</td></tr><tr><td>2.0 ft</td><td>2469.9</td><td>2469.9 lbf</td></tr><tr><td>3.0 ft</td><td>1096.8</td><td>1645.2 lbf</td></tr><tr><td>4.0 ft</td><td>616.2</td><td>1232.4 lbf</td></tr><tr><td>5.0 ft</td><td>393.8</td><td>984.4 lbf</td></tr><tr><td>6.0 ft</td><td>272.9</td><td>818.8 lbf</td></tr><tr><td>7.0 ft</td><td>200.1</td><td>700.3 lbf</td></tr><tr><td>8.0 ft</td><td>152.8</td><td>611.2 lbf</td></tr><tr><td>9.0 ft</td><td>120.4</td><td>541.7 lbf</td></tr><tr><td>10.0 ft</td><td>97.2</td><td>486.0 lbf</td></tr></table>	1.0 ft	6625.0	3313.3 lbf	2.0 ft	2469.9	2469.9 lbf	3.0 ft	1096.8	1645.2 lbf	4.0 ft	616.2	1232.4 lbf	5.0 ft	393.8	984.4 lbf	6.0 ft	272.9	818.8 lbf	7.0 ft	200.1	700.3 lbf	8.0 ft	152.8	611.2 lbf	9.0 ft	120.4	541.7 lbf	10.0 ft	97.2	486.0 lbf
1.0 ft	6625.0	3313.3 lbf																																
2.0 ft	2469.9	2469.9 lbf																																
3.0 ft	1096.8	1645.2 lbf																																
4.0 ft	616.2	1232.4 lbf																																
5.0 ft	393.8	984.4 lbf																																
6.0 ft	272.9	818.8 lbf																																
7.0 ft	200.1	700.3 lbf																																
8.0 ft	152.8	611.2 lbf																																
9.0 ft	120.4	541.7 lbf																																
10.0 ft	97.2	486.0 lbf																																

	<u>Span</u>	<u>Max Distributed (plf)</u>	<u>Max Point</u>																					
SA1x6C :=	1 ft	$\frac{\min(w_{1ftC}, w_{1ftC\Delta})}{plf}$	$\min(P_{Max1ftC}, P_{Max1ftC\Delta})$	=																				
	2 ft	$\frac{\min(w_{2ftC}, w_{2ftC\Delta})}{plf}$	$\min(P_{Max2ftC}, P_{Max2ftC\Delta})$																					
	3 ft	$\frac{\min(w_{3ftC}, w_{3ftC\Delta})}{plf}$	$\min(P_{Max3ftC}, P_{Max3ftC\Delta})$																					
	4 ft	$\frac{\min(w_{4ftC}, w_{4ftC\Delta})}{plf}$	$\min(P_{Max4ftC}, P_{Max4ftC\Delta})$																					
	5 ft	$\frac{\min(w_{5ftC}, w_{5ftC\Delta})}{plf}$	$\min(P_{Max5ftC}, P_{Max5ftC\Delta})$																					
	6 ft	$\frac{\min(w_{6ftC}, w_{6ftC\Delta})}{plf}$	$\min(P_{Max6ftC}, P_{Max6ftC\Delta})$																					
	7 ft	$\frac{\min(w_{7ftC}, w_{7ftC\Delta})}{plf}$	$\min(P_{Max7ftC}, P_{Max7ftC\Delta})$																					
			<table><tr><td>1.0 ft</td><td>2469.9</td><td>1234.1 lbf</td></tr><tr><td>2.0 ft</td><td>616.2</td><td>614.5 lbf</td></tr><tr><td>3.0 ft</td><td>272.9</td><td>406.9 lbf</td></tr><tr><td>4.0 ft</td><td>152.8</td><td>302.3 lbf</td></tr><tr><td>5.0 ft</td><td>97.2</td><td>238.8 lbf</td></tr><tr><td>6.0 ft</td><td>67.0</td><td>195.9 lbf</td></tr><tr><td>7.0 ft</td><td>48.8</td><td>164.9 lbf</td></tr></table>	1.0 ft	2469.9	1234.1 lbf	2.0 ft	616.2	614.5 lbf	3.0 ft	272.9	406.9 lbf	4.0 ft	152.8	302.3 lbf	5.0 ft	97.2	238.8 lbf	6.0 ft	67.0	195.9 lbf	7.0 ft	48.8	164.9 lbf
1.0 ft	2469.9	1234.1 lbf																						
2.0 ft	616.2	614.5 lbf																						
3.0 ft	272.9	406.9 lbf																						
4.0 ft	152.8	302.3 lbf																						
5.0 ft	97.2	238.8 lbf																						
6.0 ft	67.0	195.9 lbf																						
7.0 ft	48.8	164.9 lbf																						

Check 1x6WIDE Batten (KEB15025FWIDE/KEB2525MV2 - 6063-T5) - Weak Axis:

$$d_b := 150 \text{ mm} = 5.9 \text{ in} \quad \text{Depth of Member} \quad s_b := 25 \text{ mm} = 1.0 \text{ in} \quad \text{Width of Member}$$

$$w_{DL} := w_{selfB15025W} = 1.67 \text{ plf} \quad \text{Self Weight of Member} \quad I_y := I_{yB15025W} = 0.212 \text{ in}^4$$

Max allowable moments and shear considering batten simply supported between 2 supports. Note, dead load does not cause bending in this orientation.

Maximum Allowable Batten Moment:

Strong axis bending:

$$F_{ab6063T5} = 9.7 \text{ ksi}$$

Max Allowable Bending Stress per ADM

$$M_{MaxWA} := F_{ab6063T5} \cdot S_{yB15025W} = 3.88 \text{ kip} \cdot \text{in}$$

Max Moment Allowed for Batten - Weak Axis Bending

Maximum Allowable Batten Shear:

$$F_{av1x6} = 4.0 \text{ ksi}$$

Max Allowable Shear Stress per ADM

$$V_{MaxWA} := F_{av1x6} \cdot 2 \cdot A_{webB15025Wx} = 0.55 \text{ kip}$$

Max Shear Allowed for Batten - Weak Axis

Maximum Allowable Design Pressures For Different Spans:

Maximum Allowable Loads for Simply Supported Battens:

Max Distributed Load Weak Axis:**Max Point Loads Weak Axis:**

$$w_{1ft} := \min \left(\frac{M_{MaxWA} \cdot 8}{(1 \text{ ft})^2}, \frac{2 \cdot V_{MaxWA}}{1 \text{ ft}} \right) - w_{DL} = 1102.8 \text{ plf} \quad P_{Max1ft} := \min \left(\frac{\left(M_{MaxWA} - \frac{w_{DL} \cdot (1 \text{ ft})^2}{8} \right) \cdot 4}{1 \text{ ft}}, V_{MaxWA} \right) = 552 \text{ lbf}$$

$$w_{2ft} := \min \left(\frac{M_{MaxWA} \cdot 8}{(2 \text{ ft})^2}, \frac{2 \cdot V_{MaxWA}}{2 \text{ ft}} \right) - w_{DL} = 550.5 \text{ plf} \quad P_{Max2ft} := \min \left(\frac{\left(M_{MaxWA} - \frac{w_{DL} \cdot (2 \text{ ft})^2}{8} \right) \cdot 4}{2 \text{ ft}}, V_{MaxWA} \right) = 552 \text{ lbf}$$

$$w_{3ft} := \min \left(\frac{M_{MaxWA} \cdot 8}{(3 \text{ ft})^2}, \frac{2 \cdot V_{MaxWA}}{3 \text{ ft}} \right) - w_{DL} = 285.5 \text{ plf} \quad P_{Max3ft} := \min \left(\frac{\left(M_{MaxWA} - \frac{w_{DL} \cdot (3 \text{ ft})^2}{8} \right) \cdot 4}{3 \text{ ft}}, V_{MaxWA} \right) = 428 \text{ lbf}$$

$$w_{4ft} := \min \left(\frac{M_{MaxWA} \cdot 8}{(4 \text{ ft})^2}, \frac{2 \cdot V_{MaxWA}}{4 \text{ ft}} \right) - w_{DL} = 159.8 \text{ plf} \quad P_{Max4ft} := \min \left(\frac{\left(M_{MaxWA} - \frac{w_{DL} \cdot (4 \text{ ft})^2}{8} \right) \cdot 4}{4 \text{ ft}}, V_{MaxWA} \right) = 320 \text{ lbf}$$

$$w_{5ft} := \min \left(\frac{M_{MaxWA} \cdot 8}{(5 \text{ ft})^2}, \frac{2 \cdot V_{MaxWA}}{5 \text{ ft}} \right) - w_{DL} = 101.7 \text{ plf} \quad P_{Max5ft} := \min \left(\frac{\left(M_{MaxWA} - \frac{w_{DL} \cdot (5 \text{ ft})^2}{8} \right) \cdot 4}{5 \text{ ft}}, V_{MaxWA} \right) = 254 \text{ lbf}$$

$$w_{6ft} := \min \left(\frac{M_{MaxWA} \cdot 8}{(6 \text{ ft})^2}, \frac{2 \cdot V_{MaxWA}}{6 \text{ ft}} \right) - w_{DL} = 70.1 \text{ plf} \quad P_{Max6ft} := \min \left(\frac{\left(M_{MaxWA} - \frac{w_{DL} \cdot (6 \text{ ft})^2}{8} \right) \cdot 4}{6 \text{ ft}}, V_{MaxWA} \right) = 210 \text{ lbf}$$

$$w_{7ft} := \min \left(\frac{M_{MaxWA} \cdot 8}{(7 \text{ ft})^2}, \frac{2 \cdot V_{MaxWA}}{7 \text{ ft}} \right) - w_{DL} = 51.1 \text{ plf} \quad P_{Max7ft} := \min \left(\frac{\left(M_{MaxWA} - \frac{w_{DL} \cdot (7 \text{ ft})^2}{8} \right) \cdot 4}{7 \text{ ft}}, V_{MaxWA} \right) = 179 \text{ lbf}$$

$$w_{8ft} := \min \left(\frac{M_{MaxWA} \cdot 8}{(8 \text{ ft})^2}, \frac{2 \cdot V_{MaxWA}}{8 \text{ ft}} \right) - w_{DL} = 38.7 \text{ plf} \quad P_{Max8ft} := \min \left(\frac{\left(M_{MaxWA} - \frac{w_{DL} \cdot (8 \text{ ft})^2}{8} \right) \cdot 4}{8 \text{ ft}}, V_{MaxWA} \right) = 155 \text{ lbf}$$

$$w_{9ft} := \min \left(\frac{M_{MaxWA} \cdot 8}{(9 \text{ ft})^2}, \frac{2 \cdot V_{MaxWA}}{9 \text{ ft}} \right) - w_{DL} = 30.2 \text{ plf} \quad P_{Max9ft} := \min \left(\frac{\left(M_{MaxWA} - \frac{w_{DL} \cdot (9 \text{ ft})^2}{8} \right) \cdot 4}{9 \text{ ft}}, V_{MaxWA} \right) = 136 \text{ lbf}$$

$$w_{10ft} := \min \left(\frac{M_{MaxWA} \cdot 8}{(10 \text{ ft})^2}, \frac{2 \cdot V_{MaxWA}}{10 \text{ ft}} \right) - w_{DL} = 24.2 \text{ plf} \quad P_{Max10ft} := \min \left(\frac{\left(M_{MaxWA} - \frac{w_{DL} \cdot (10 \text{ ft})^2}{8} \right) \cdot 4}{10 \text{ ft}}, V_{MaxWA} \right) = 121 \text{ lbf}$$

Max Distributed Load For Deflection - Weak Axis:

$$w_{1ft\Delta} := \frac{\frac{1 \text{ ft}}{60} \cdot 384 \cdot E \cdot I_y}{5 \cdot (1 \text{ ft})^4} = 19014.9 \text{ plf}$$

$$w_{2ft\Delta} := \frac{\frac{2 \text{ ft}}{60} \cdot 384 \cdot E \cdot I_y}{5 \cdot (2 \text{ ft})^4} = 2376.9 \text{ plf}$$

$$w_{3ft\Delta} := \frac{\frac{3 \text{ ft}}{60} \cdot 384 \cdot E \cdot I_y}{5 \cdot (3 \text{ ft})^4} = 704.3 \text{ plf}$$

$$w_{4ft\Delta} := \frac{\frac{4 \text{ ft}}{60} \cdot 384 \cdot E \cdot I_y}{5 \cdot (4 \text{ ft})^4} = 297.1 \text{ plf}$$

$$w_{5ft\Delta} := \frac{\frac{5 \text{ ft}}{60} \cdot 384 \cdot E \cdot I_y}{5 \cdot (5 \text{ ft})^4} = 152.1 \text{ plf}$$

$$w_{6ft\Delta} := \frac{\frac{6 \text{ ft}}{60} \cdot 384 \cdot E \cdot I_y}{5 \cdot (6 \text{ ft})^4} = 88.0 \text{ plf}$$

$$w_{7ft\Delta} := \frac{\frac{7 \text{ ft}}{60} \cdot 384 \cdot E \cdot I_y}{5 \cdot (7 \text{ ft})^4} = 55.4 \text{ plf}$$

$$w_{8ft\Delta} := \frac{\frac{8 \text{ ft}}{60} \cdot 384 \cdot E \cdot I_y}{5 \cdot (8 \text{ ft})^4} = 37.1 \text{ plf}$$

$$w_{9ft\Delta} := \frac{\frac{9 \text{ ft}}{60} \cdot 384 \cdot E \cdot I_y}{5 \cdot (9 \text{ ft})^4} = 26.1 \text{ plf}$$

$$w_{10ft\Delta} := \frac{\frac{10 \text{ ft}}{60} \cdot 384 \cdot E \cdot I_y}{5 \cdot (10 \text{ ft})^4} = 19.0 \text{ plf}$$

Max Point Load For Deflection - Weak Axis:

$$P_{Max1ft\Delta} := \frac{\frac{1 \text{ ft}}{60} \cdot 48 \cdot E \cdot I_y}{(1 \text{ ft})^3} = 11884.3 \text{ lbf}$$

$$P_{Max2ft\Delta} := \frac{\frac{2 \text{ ft}}{60} \cdot 48 \cdot E \cdot I_y}{(2 \text{ ft})^3} = 2971.1 \text{ lbf}$$

$$P_{Max3ft\Delta} := \frac{\frac{3 \text{ ft}}{60} \cdot 48 \cdot E \cdot I_y}{(3 \text{ ft})^3} = 1320.5 \text{ lbf}$$

$$P_{Max4ft\Delta} := \frac{\frac{4 \text{ ft}}{60} \cdot 48 \cdot E \cdot I_y}{(4 \text{ ft})^3} = 742.8 \text{ lbf}$$

$$P_{Max5ft\Delta} := \frac{\frac{5 \text{ ft}}{60} \cdot 48 \cdot E \cdot I_y}{(5 \text{ ft})^3} = 475.4 \text{ lbf}$$

$$P_{Max6ft\Delta} := \frac{\frac{6 \text{ ft}}{60} \cdot 48 \cdot E \cdot I_y}{(6 \text{ ft})^3} = 330.1 \text{ lbf}$$

$$P_{Max7ft\Delta} := \frac{\frac{7 \text{ ft}}{60} \cdot 48 \cdot E \cdot I_y}{(7 \text{ ft})^3} = 242.5 \text{ lbf}$$

$$P_{Max8ft\Delta} := \frac{\frac{8 \text{ ft}}{60} \cdot 48 \cdot E \cdot I_y}{(8 \text{ ft})^3} = 185.7 \text{ lbf}$$

$$P_{Max9ft\Delta} := \frac{\frac{9 \text{ ft}}{60} \cdot 48 \cdot E \cdot I_y}{(9 \text{ ft})^3} = 146.7 \text{ lbf}$$

$$P_{Max10ft\Delta} := \frac{\frac{10 \text{ ft}}{60} \cdot 48 \cdot E \cdot I_y}{(10 \text{ ft})^3} = 118.8 \text{ lbf}$$

Maximum Allowable Design Pressures For Cantilevered Battens:

Maximum Allowable Loads for Cantilevered Battens:

Max Distributed Load Weak Axis:

$$w_{1ftC} := \min \left(\frac{M_{MaxWA} \cdot 2}{(1 \text{ ft})^2}, \frac{V_{MaxWA}}{1 \text{ ft}} \right) - w_{DL} = 550.5 \text{ plf}$$

$$w_{2ftC} := \min \left(\frac{M_{MaxWA} \cdot 2}{(2 \text{ ft})^2}, \frac{V_{MaxWA}}{2 \text{ ft}} \right) - w_{DL} = 159.8 \text{ plf}$$

$$w_{3ftC} := \min \left(\frac{M_{MaxWA} \cdot 2}{(3 \text{ ft})^2}, \frac{V_{MaxWA}}{3 \text{ ft}} \right) - w_{DL} = 70.1 \text{ plf}$$

$$w_{4ftC} := \min \left(\frac{M_{MaxWA} \cdot 2}{(4 \text{ ft})^2}, \frac{V_{MaxWA}}{4 \text{ ft}} \right) - w_{DL} = 38.7 \text{ plf}$$

$$w_{5ftC} := \min \left(\frac{M_{MaxWA} \cdot 2}{(5 \text{ ft})^2}, \frac{V_{MaxWA}}{5 \text{ ft}} \right) - w_{DL} = 24.2 \text{ plf}$$

$$w_{6ftC} := \min \left(\frac{M_{MaxWA} \cdot 2}{(6 \text{ ft})^2}, \frac{V_{MaxWA}}{6 \text{ ft}} \right) - w_{DL} = 16.3 \text{ plf}$$

$$w_{7ftC} := \min \left(\frac{M_{MaxWA} \cdot 2}{(7 \text{ ft})^2}, \frac{V_{MaxWA}}{7 \text{ ft}} \right) - w_{DL} = 11.5 \text{ plf}$$

Max Point Loads Weak Axis:

$$P_{Max1ftC} := \min \left(\frac{M_{MaxWA}}{1 \text{ ft}}, V_{MaxWA} \right) - w_{DL} \cdot 1 \text{ ft} = 321 \text{ lbf}$$

$$P_{Max2ftC} := \min \left(\frac{M_{MaxWA}}{2 \text{ ft}}, V_{MaxWA} \right) - w_{DL} \cdot 2 \text{ ft} = 158 \text{ lbf}$$

$$P_{Max3ftC} := \min \left(\frac{M_{MaxWA}}{3 \text{ ft}}, V_{MaxWA} \right) - w_{DL} \cdot 3 \text{ ft} = 103 \text{ lbf}$$

$$P_{Max4ftC} := \min \left(\frac{M_{MaxWA}}{4 \text{ ft}}, V_{MaxWA} \right) - w_{DL} \cdot 4 \text{ ft} = 74 \text{ lbf}$$

$$P_{Max5ftC} := \min \left(\frac{M_{MaxWA}}{5 \text{ ft}}, V_{MaxWA} \right) - w_{DL} \cdot 5 \text{ ft} = 56 \text{ lbf}$$

$$P_{Max6ftC} := \min \left(\frac{M_{MaxWA}}{6 \text{ ft}}, V_{MaxWA} \right) - w_{DL} \cdot 6 \text{ ft} = 44 \text{ lbf}$$

$$P_{Max7ftC} := \min \left(\frac{M_{MaxWA}}{7 \text{ ft}}, V_{MaxWA} \right) - w_{DL} \cdot 7 \text{ ft} = 34 \text{ lbf}$$

Max Distributed Load For Deflection - Weak Axis:

$$w_{1ftCD} := \frac{\frac{2 \cdot 1 \text{ ft}}{60} \cdot 8 \cdot E \cdot I_y}{(1 \text{ ft})^4} = 3961.4 \text{ plf}$$

$$w_{2ftCD} := \frac{\frac{2 \cdot 2 \text{ ft}}{60} \cdot 8 \cdot E \cdot I_y}{(2 \text{ ft})^4} = 495.2 \text{ plf}$$

$$w_{3ftCD} := \frac{\frac{2 \cdot 3 \text{ ft}}{60} \cdot 8 \cdot E \cdot I_y}{(3 \text{ ft})^4} = 146.7 \text{ plf}$$

$$w_{4ftCD} := \frac{\frac{2 \cdot 4 \text{ ft}}{60} \cdot 8 \cdot E \cdot I_y}{(4 \text{ ft})^4} = 61.9 \text{ plf}$$

$$w_{5ftCD} := \frac{\frac{2 \cdot 5 \text{ ft}}{60} \cdot 8 \cdot E \cdot I_y}{(5 \text{ ft})^4} = 31.7 \text{ plf}$$

$$w_{6ftCD} := \frac{\frac{2 \cdot 6 \text{ ft}}{60} \cdot 8 \cdot E \cdot I_y}{(6 \text{ ft})^4} = 18.3 \text{ plf}$$

$$w_{7ftCD} := \frac{\frac{2 \cdot 7 \text{ ft}}{60} \cdot 8 \cdot E \cdot I_y}{(7 \text{ ft})^4} = 11.5 \text{ plf}$$

Max Point Load For Deflection - Weak Axis:

$$P_{Max1ftCD} := \frac{\frac{2 \cdot 1 \text{ ft}}{60} \cdot 3 \cdot E \cdot I_y}{(1 \text{ ft})^3} = 1485.5 \text{ lbf}$$

$$P_{Max2ftCD} := \frac{\frac{2 \cdot 2 \text{ ft}}{60} \cdot 3 \cdot E \cdot I_y}{(2 \text{ ft})^3} = 371.4 \text{ lbf}$$

$$P_{Max3ftCD} := \frac{\frac{2 \cdot 3 \text{ ft}}{60} \cdot 3 \cdot E \cdot I_y}{(3 \text{ ft})^3} = 165.1 \text{ lbf}$$

$$P_{Max4ftCD} := \frac{\frac{2 \cdot 4 \text{ ft}}{60} \cdot 3 \cdot E \cdot I_y}{(4 \text{ ft})^3} = 92.8 \text{ lbf}$$

$$P_{Max5ftCD} := \frac{\frac{2 \cdot 5 \text{ ft}}{60} \cdot 3 \cdot E \cdot I_y}{(5 \text{ ft})^3} = 59.4 \text{ lbf}$$

$$P_{Max6ftCD} := \frac{\frac{2 \cdot 6 \text{ ft}}{60} \cdot 3 \cdot E \cdot I_y}{(6 \text{ ft})^3} = 41.3 \text{ lbf}$$

$$P_{Max7ftCD} := \frac{\frac{2 \cdot 7 \text{ ft}}{60} \cdot 3 \cdot E \cdot I_y}{(7 \text{ ft})^3} = 30.3 \text{ lbf}$$

Span Table Summary - Weak Axis 1x6WIDE:

	<u>Span</u>	<u>Max Distributed (plf)</u>	<u>Max Point</u>																																									
WA1x6:=	1 ft	$\frac{\min(w_{1ft}, w_{1ft\Delta})}{plf}$	$\min(P_{Max1ft}, P_{Max1ft\Delta})$	=																																								
	2 ft	$\frac{\min(w_{2ft}, w_{2ft\Delta})}{plf}$	$\min(P_{Max2ft}, P_{Max2ft\Delta})$																																									
	3 ft	$\frac{\min(w_{3ft}, w_{3ft\Delta})}{plf}$	$\min(P_{Max3ft}, P_{Max3ft\Delta})$																																									
	4 ft	$\frac{\min(w_{4ft}, w_{4ft\Delta})}{plf}$	$\min(P_{Max4ft}, P_{Max4ft\Delta})$																																									
	5 ft	$\frac{\min(w_{5ft}, w_{5ft\Delta})}{plf}$	$\min(P_{Max5ft}, P_{Max5ft\Delta})$																																									
	6 ft	$\frac{\min(w_{6ft}, w_{6ft\Delta})}{plf}$	$\min(P_{Max6ft}, P_{Max6ft\Delta})$																																									
	7 ft	$\frac{\min(w_{7ft}, w_{7ft\Delta})}{plf}$	$\min(P_{Max7ft}, P_{Max7ft\Delta})$																																									
	8 ft	$\frac{\min(w_{8ft}, w_{8ft\Delta})}{plf}$	$\min(P_{Max8ft}, P_{Max8ft\Delta})$																																									
	9 ft	$\frac{\min(w_{9ft}, w_{9ft\Delta})}{plf}$	$\min(P_{Max9ft}, P_{Max9ft\Delta})$																																									
	10 ft	$\frac{\min(w_{10ft}, w_{10ft\Delta})}{plf}$	$\min(P_{Max10ft}, P_{Max10ft\Delta})$																																									
				<table><tr><td>1.0 ft</td><td>1102.8</td><td>552.2</td><td>lbf</td></tr><tr><td>2.0 ft</td><td>550.5</td><td>552.2</td><td>lbf</td></tr><tr><td>3.0 ft</td><td>285.5</td><td>428.2</td><td>lbf</td></tr><tr><td>4.0 ft</td><td>159.8</td><td>319.7</td><td>lbf</td></tr><tr><td>5.0 ft</td><td>101.7</td><td>254.2</td><td>lbf</td></tr><tr><td>6.0 ft</td><td>70.1</td><td>210.3</td><td>lbf</td></tr><tr><td>7.0 ft</td><td>51.1</td><td>178.7</td><td>lbf</td></tr><tr><td>8.0 ft</td><td>37.1</td><td>154.8</td><td>lbf</td></tr><tr><td>9.0 ft</td><td>26.1</td><td>136.1</td><td>lbf</td></tr><tr><td>10.0 ft</td><td>19.0</td><td>118.8</td><td>lbf</td></tr></table>	1.0 ft	1102.8	552.2	lbf	2.0 ft	550.5	552.2	lbf	3.0 ft	285.5	428.2	lbf	4.0 ft	159.8	319.7	lbf	5.0 ft	101.7	254.2	lbf	6.0 ft	70.1	210.3	lbf	7.0 ft	51.1	178.7	lbf	8.0 ft	37.1	154.8	lbf	9.0 ft	26.1	136.1	lbf	10.0 ft	19.0	118.8	lbf
1.0 ft	1102.8	552.2	lbf																																									
2.0 ft	550.5	552.2	lbf																																									
3.0 ft	285.5	428.2	lbf																																									
4.0 ft	159.8	319.7	lbf																																									
5.0 ft	101.7	254.2	lbf																																									
6.0 ft	70.1	210.3	lbf																																									
7.0 ft	51.1	178.7	lbf																																									
8.0 ft	37.1	154.8	lbf																																									
9.0 ft	26.1	136.1	lbf																																									
10.0 ft	19.0	118.8	lbf																																									

	Span	Max Distributed (plf)	Max Point																													
WA1x6C:=	1 ft	$\frac{\min(w_{1ftC}, w_{1ftC\Delta})}{plf}$	$\min(P_{Max1ftC}, P_{Max1ftC\Delta})$	=																												
	2 ft	$\frac{\min(w_{2ftC}, w_{2ftC\Delta})}{plf}$	$\min(P_{Max2ftC}, P_{Max2ftC\Delta})$																													
	3 ft	$\frac{\min(w_{3ftC}, w_{3ftC\Delta})}{plf}$	$\min(P_{Max3ftC}, P_{Max3ftC\Delta})$																													
	4 ft	$\frac{\min(w_{4ftC}, w_{4ftC\Delta})}{plf}$	$\min(P_{Max4ftC}, P_{Max4ftC\Delta})$																													
	5 ft	$\frac{\min(w_{5ftC}, w_{5ftC\Delta})}{plf}$	$\min(P_{Max5ftC}, P_{Max5ftC\Delta})$																													
	6 ft	$\frac{\min(w_{6ftC}, w_{6ftC\Delta})}{plf}$	$\min(P_{Max6ftC}, P_{Max6ftC\Delta})$																													
	7 ft	$\frac{\min(w_{7ftC}, w_{7ftC\Delta})}{plf}$	$\min(P_{Max7ftC}, P_{Max7ftC\Delta})$																													
						<table><tr><td>1.0 ft</td><td>550.5</td><td>321.4</td><td>lbf</td></tr><tr><td>2.0 ft</td><td>159.8</td><td>158.2</td><td>lbf</td></tr><tr><td>3.0 ft</td><td>70.1</td><td>102.7</td><td>lbf</td></tr><tr><td>4.0 ft</td><td>38.7</td><td>74.1</td><td>lbf</td></tr><tr><td>5.0 ft</td><td>24.2</td><td>56.3</td><td>lbf</td></tr><tr><td>6.0 ft</td><td>16.3</td><td>41.3</td><td>lbf</td></tr><tr><td>7.0 ft</td><td>11.5</td><td>30.3</td><td>lbf</td></tr></table>	1.0 ft	550.5	321.4	lbf	2.0 ft	159.8	158.2	lbf	3.0 ft	70.1	102.7	lbf	4.0 ft	38.7	74.1	lbf	5.0 ft	24.2	56.3	lbf	6.0 ft	16.3	41.3	lbf	7.0 ft	11.5
1.0 ft	550.5	321.4	lbf																													
2.0 ft	159.8	158.2	lbf																													
3.0 ft	70.1	102.7	lbf																													
4.0 ft	38.7	74.1	lbf																													
5.0 ft	24.2	56.3	lbf																													
6.0 ft	16.3	41.3	lbf																													
7.0 ft	11.5	30.3	lbf																													

Check Thermal Expansion of Batten:

Check the change in length due to change in temperature along the longest unrestrained length of the battens.

$$\Delta_t := 100 \text{ } ^\circ F$$

Max change in temperature considered.

$$\alpha := 0.0000142 \frac{\text{in}}{\text{in}} / ^\circ F$$

Aluminum Thermal Expansion Coefficient

$$E_A := 10100 \text{ ksi}$$

Aluminum Young's Modulus (6063-T6 Alloy)

$$L_O := 18.5 \text{ ft}$$

Max Length of Batten (Considering Max Unrestrained Span Length)

$$D := 0.21 \text{ in}$$

Diameter of Fastener

$$n := 2$$

Number of Fasteners

Find change in length from temperature change:

$$\Delta_l := \alpha \cdot \Delta_t \cdot L_O = 0.3 \text{ in}$$

Linear expansion due to change in temperature

$$L_{min1} := 2 \Delta_l + D = 0.8 \text{ in}$$

Min Slot Length with Slot at One End

$$L_{min2} := \frac{2 \Delta_l + 2 D}{2} = 0.5 \text{ in}$$

Min Slot Length with a Slots At Each End

Therefore, Provide Slots 1" Long at One End or 1/2" Long Slots at all Connections for Single Batten

APPENDIX 'A'

(TECHNICAL & PRODUCT DATA SHEETS)

Please be advised, the product data sheets contained in this appendix are included in this submission for their load capacities only, which are referenced in the attached calculations. PVE does not mandate that the contractor must use the exact products manufactured by the companies listed on said product data sheets. The contractor may substitute for any of the products contained in this appendix provided that the substituted products are equivalent or better than those listed in this appendix.