

Surface Finish Variation Notice



K **KNOTWOOD**[™]
Stunning Aluminum

Due to the nature of the sublimation process, color variation and some blemishes will occur.

This unique product is designed to mimic real wood with color and image inconsistencies.

Not every piece is designed to be exactly the same.

THE FOLLOWING IMAGES ARE A VISUAL GUIDE
TO THE WORDING OF CLAUSE 12 OF KNOTWOOD'S
TERMS AND CONDITIONS OF SALE.

Terms and Conditions. *Customer Acknowledgement.*

Sublimation Variation.

Customers are to read and acknowledge our color variation policy. This policy states that the Knotwood sublimated finishes are designed to mimic natural wood, and like real wood, color variations and unique characteristics can occur. Please reference this document for acceptable examples of variations.

Customer Agreement.

By placing this order and/or paying for these items, I agree that I have checked all color and/or profiles, and that all quantities are correct. I understand this order will be manufactured to the details on this order and once accepted, changes cannot be made. Please note that once any cuts or changes are made to the Knotwood item(s) in this order you have received, you formally take ownership and responsibility for the item(s). No refund or exchange will be offered if any changes to the length or condition of the item(s) are made. There will be no refunds for manufactured products or kit items.

Please do not finalize starting dates for installation until after the goods have been delivered and checked.

Full Terms and Conditions of Sale available on request.

Natural Variation. *Inconsistencies Explained.*

Knotwood may from time-to-time exhibit variations in pattern, veining, shade, color, texture, surface, finish and markings; Timber grain color variations may occur due to the sublimation process.

This unique product is designed to mimic real wood with color and image inconsistencies. This is not considered to be a defect or warranty issue.

For guidance, please refer to our **Woodgrain Variation Installation Guide**.

Available on our website.

Resources ↗




References →

Acceptable Sublimated Finish.


Color Variation. *Sample One.*



Color Variation. *Sample Two.*

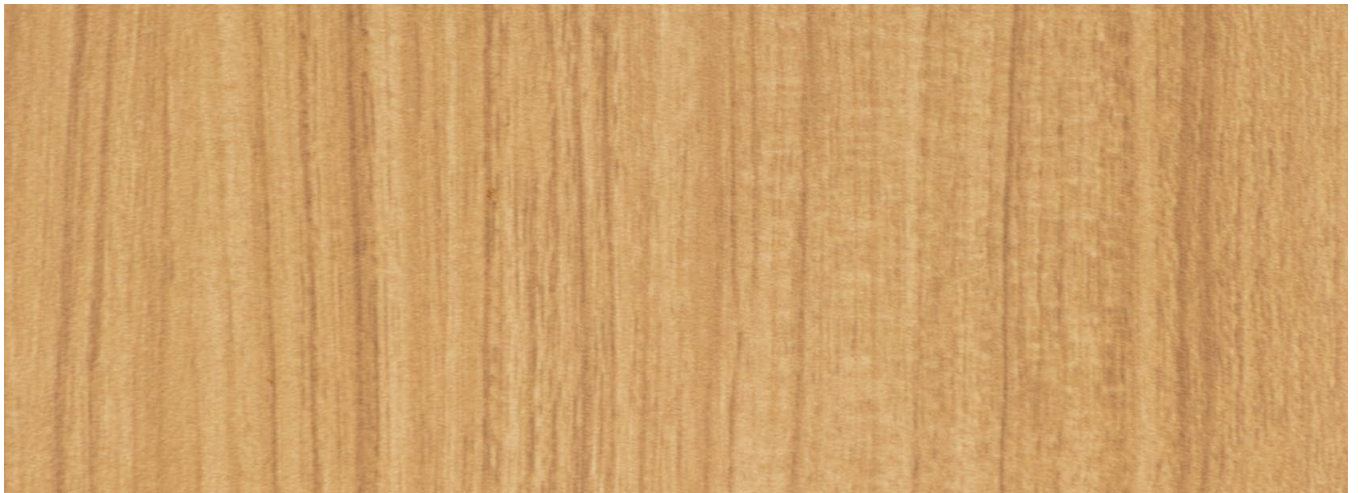


Color Variation. *Sample Three.*

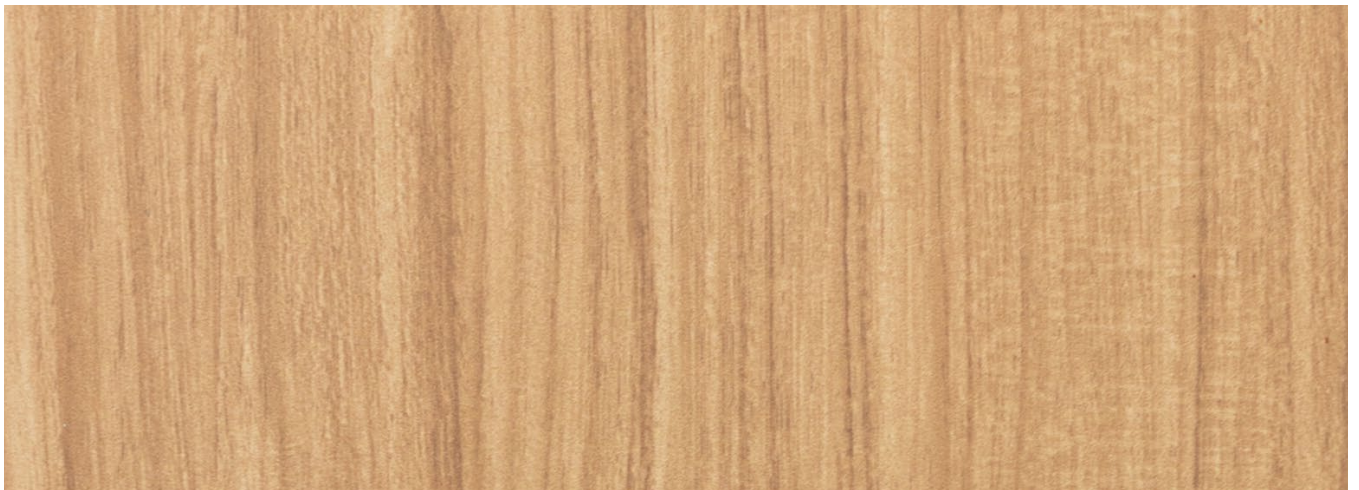

Acceptable Sublimated Finish.

Image Distortion.

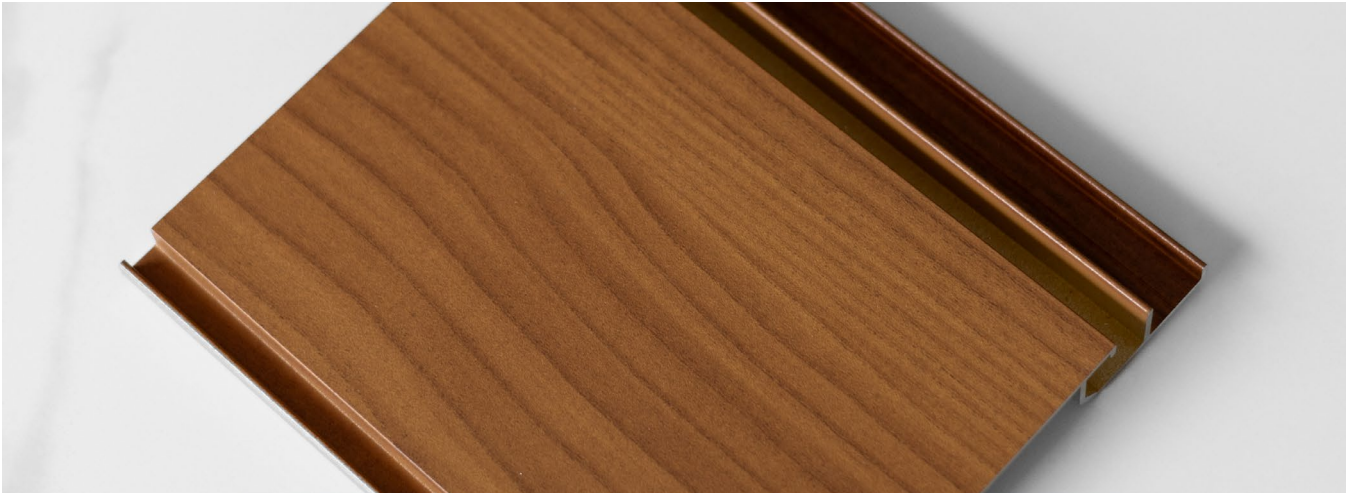

Film Crease.



Vacuumed Film Ends.




Acceptable Sublimated Finish.

Pattern Variation.



Film Seam Line.

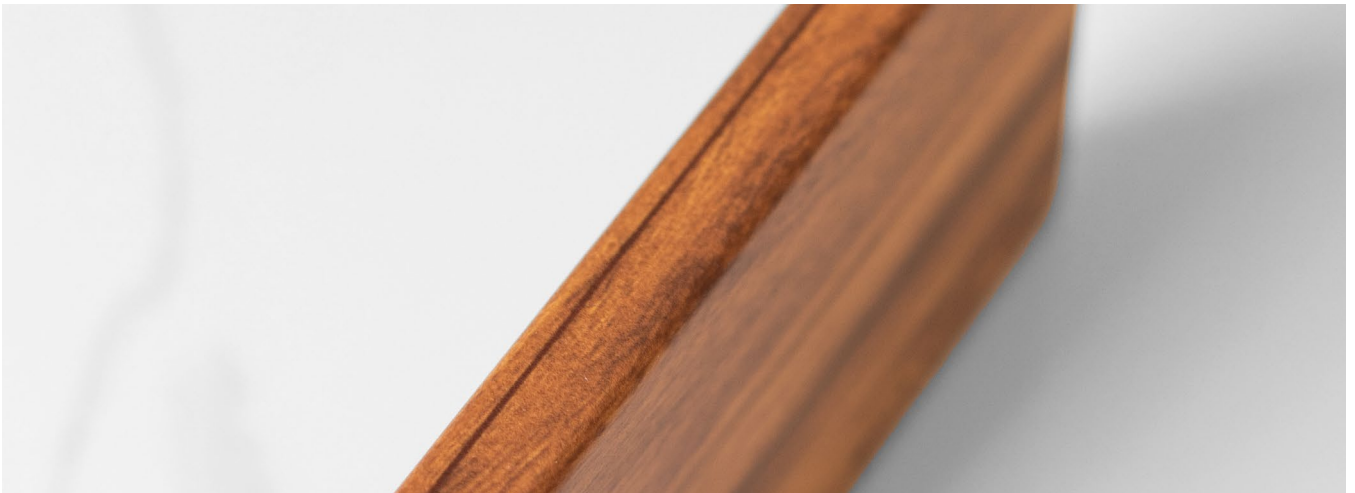


Hanging Hole.




Acceptable Sublimated Finish.


Non-Visible Surface.

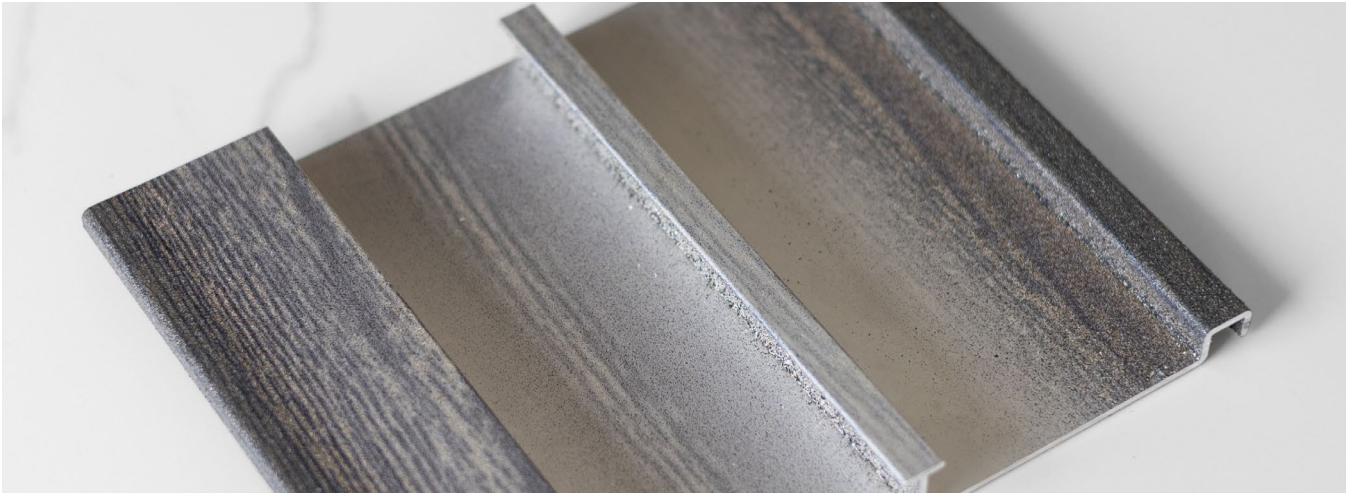

Internal Angle.

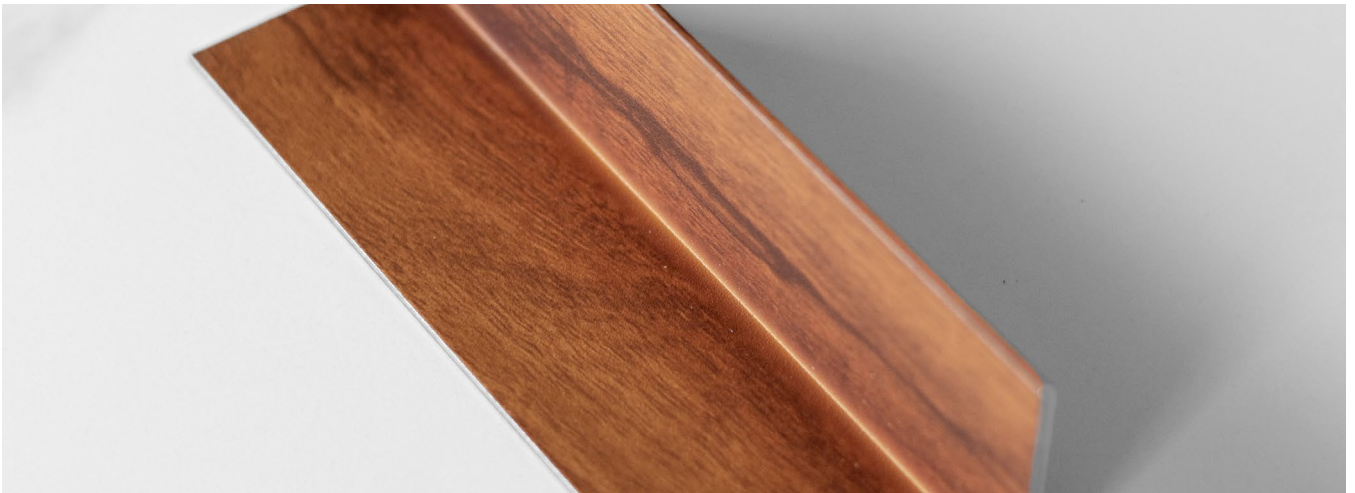

Taped Ends.

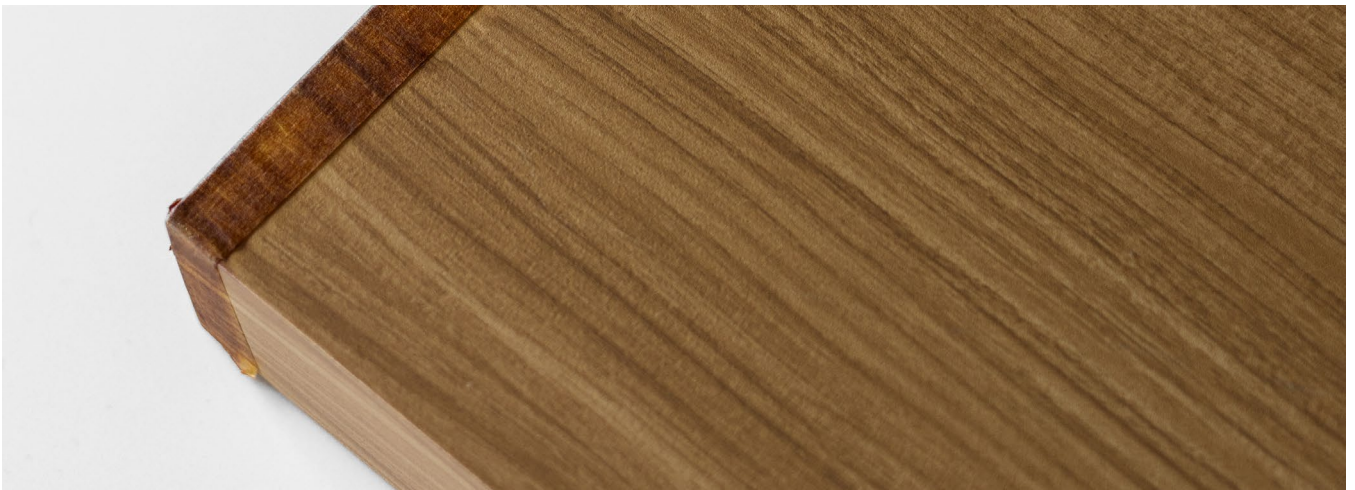

Powder Coat Finish

Visible Surfaces.

The powder coating shall be of uniform appearance, colour and texture and be free of excessive scratches which penetrate through to the base metal. Surfaces are to be view from a minimum distance of 1 meter, where the product is installed and accessible under normal conditions (i.e. ground level wall – see figure 1.1). Further distance is allowed in proportion to the installation position of the finished product in applications where the product is in-accessible from ground level (see figure 1.2).

Viewing Conditions.

Figure 1.1


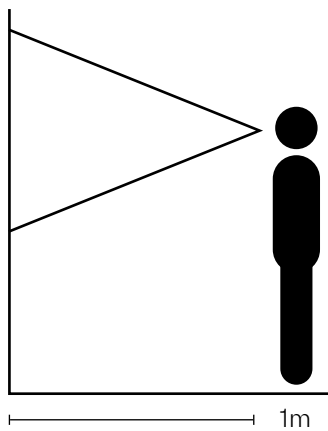


Figure 1.2

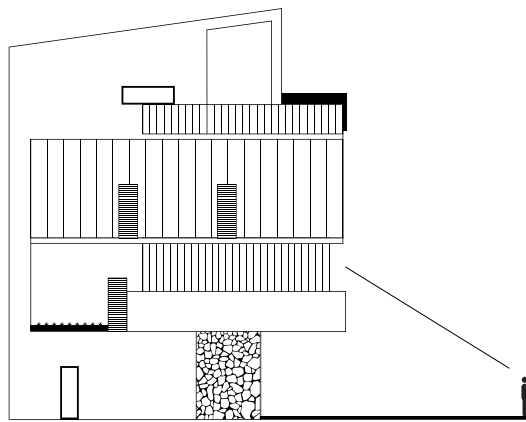

Secondary & Non-Visible Surfaces.

There is no guarantee of powder coat coverage or thickness in these areas which include but are not limited to internal corners, recesses and channels.