




TRX and T-BIRD

Vinyl Railing

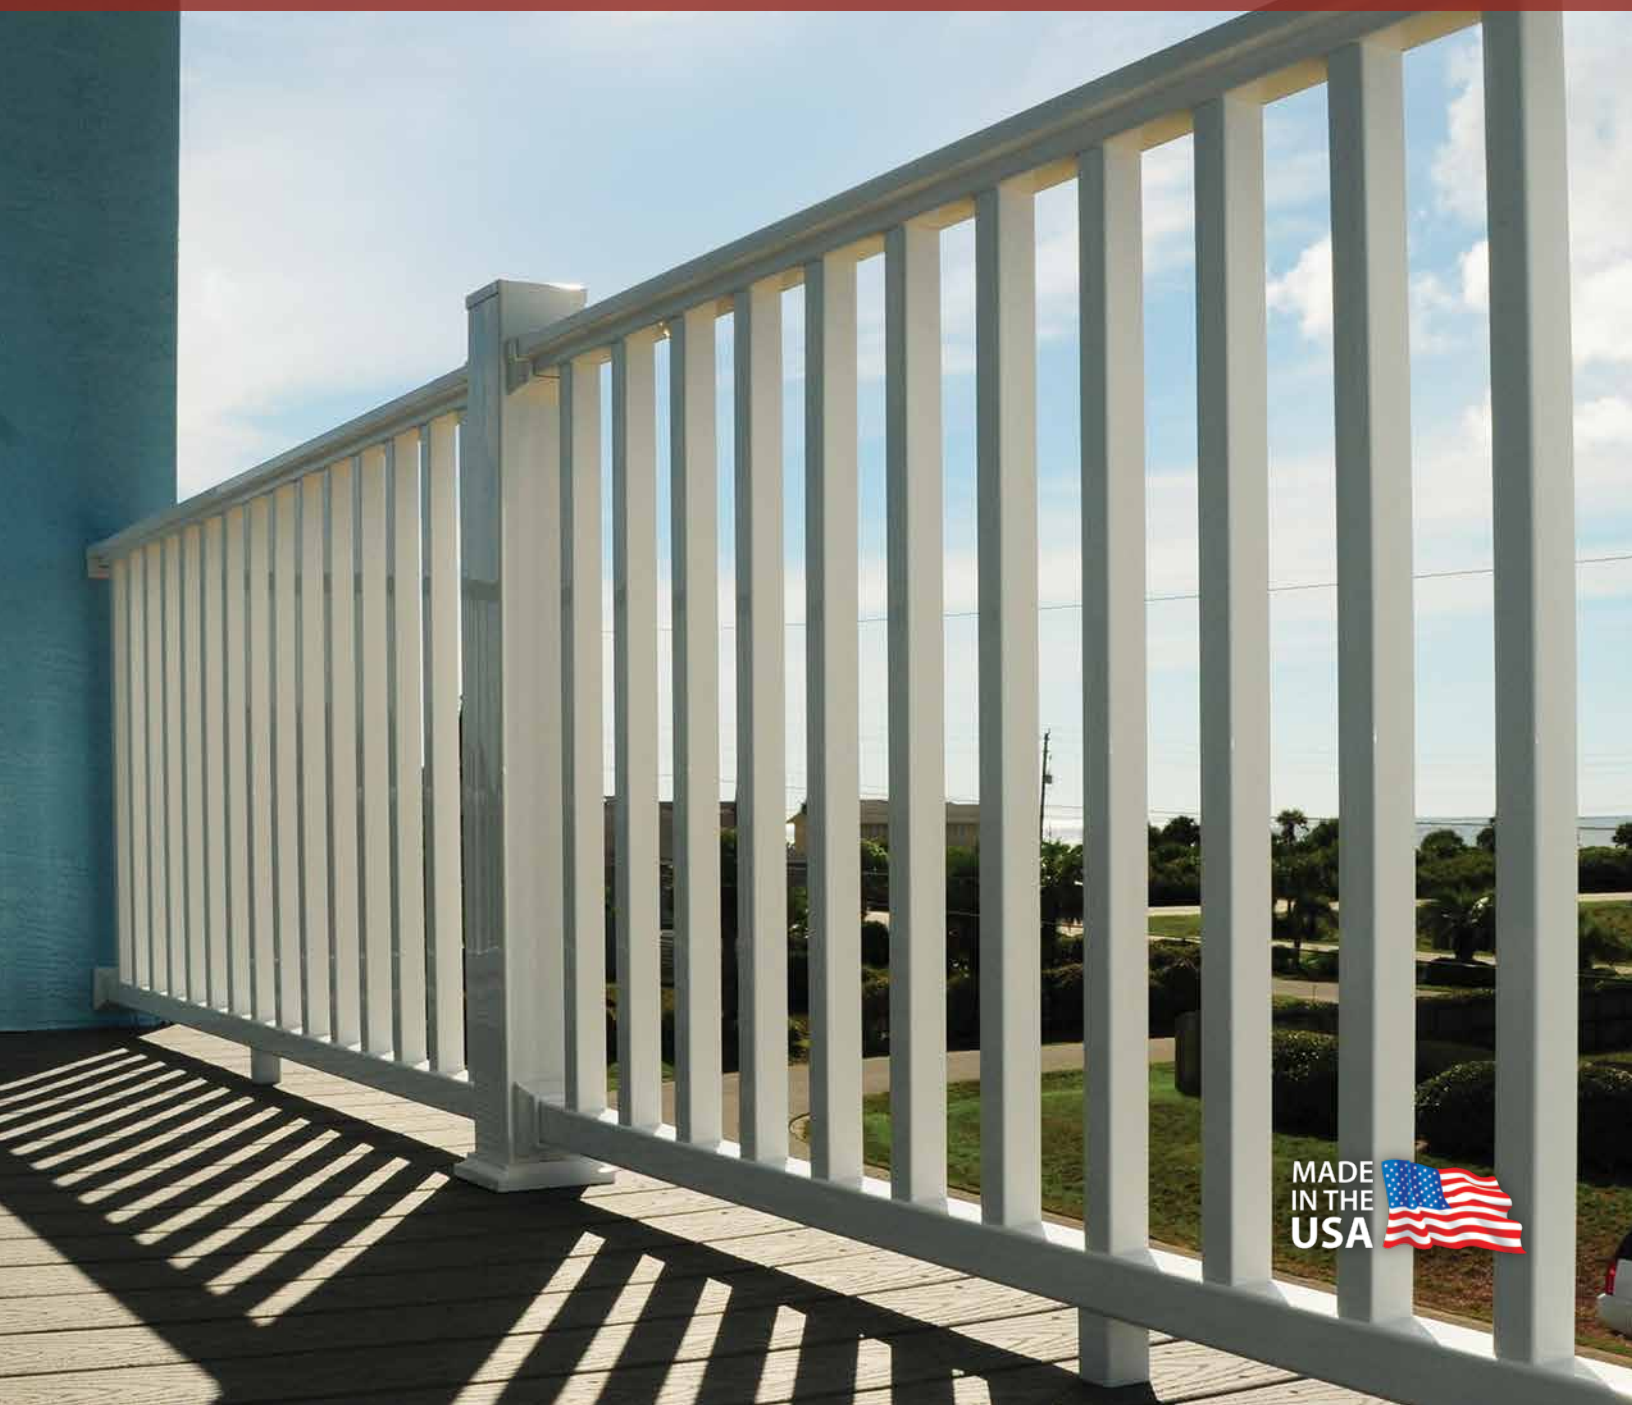

MADE
IN THE
USA 



DSI ADVANTAGES

1

PolyRail® TRX Vinyl Railing has passed IBC code requirements. CCRR-0147

2

4-Way Adjustable Aluminum Post Mount

3

PolyRail® T-Bird Vinyl Railing features a distinct T-shaped top rail creating a "Drink Rail".

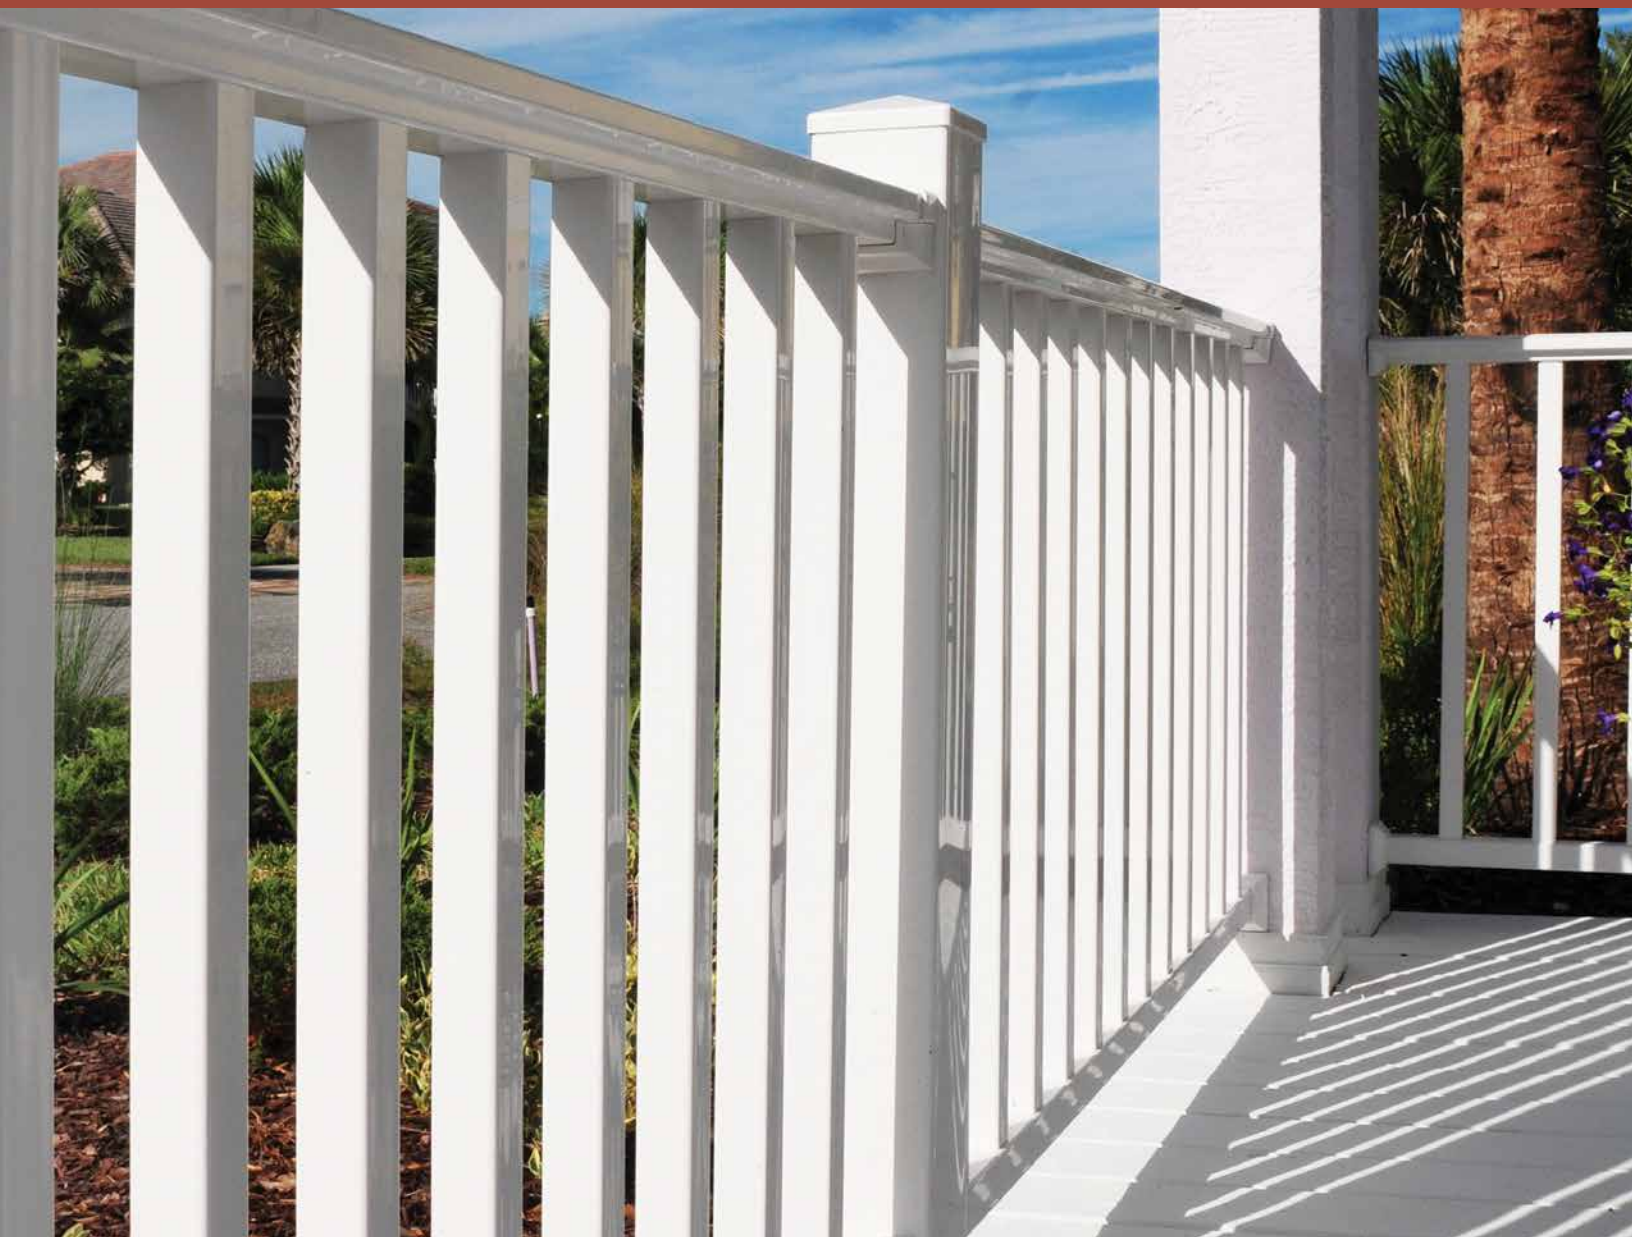


TABLE OF CONTENTS

TRX Vinyl Railing	2-5
T-Bird Vinyl Railing	6-9
Standard Vinyl Posts and Post Mounts	10-11
“A” Series Decorative Vinyl Posts	12
Column Clad Vinyl Post Wraps	13
“B” Series Aluminum Posts	14
Continuous Handrail	15
Colors and Powder Coating	16-17



TRX VINYL RAILING



TRX RAILING



STANDARD BALUSTER

1-3/8" x 1-3/8" Square Vinyl
3-7/8" Baluster Spacing

White

Tan

Mocha



"A" SERIES BALUSTER

1-3/8" x 1-3/8" Decorative Vinyl
3-7/8" Baluster Spacing
42" Balusters are Aluminum Reinforced

White

Tan



"B" SERIES BALUSTER

3/4" Round Aluminum
3-7/8" Baluster Spacing
See Page 16 for Baluster Colors

White

Tan

Mocha

For code compliance information visit diggerspecialties.com for details on lengths and balusters covered by testing report CCRR-0147.


Section Type	Length										Height		Baluster Style		
	4'	5'	6'	7'	8'	9'	10'	12'	14'	16'	36"	42"	Std	A	B
Straight	•	•	•	•	•	•	•				•	•	•	•	•
Stair	•	•	•	•	•	•	•				•	•	•	•	•
Crossover - Straight								•	•	•	•	•	•	•	•
Crossover - Stair											Not Available	Not Available	Not Available	Not Available	Not Available
Single Chippendale - Straight	•	•	•	•	•	•	•				•	•	•		
Double Chippendale - Straight					•	•	•				•	•	•		
Chippendale - Stair											Not Available	Not Available	Not Available	Not Available	Not Available
Single Caribbean - Straight	•	•	•	•	•	•	•				•		•		
Double Caribbean - Straight					•	•	•				•		•		
Caribbean - Stair											Not Available	Not Available	Not Available	Not Available	Not Available



CROSSOVER



SINGLE CHIPPENDALE

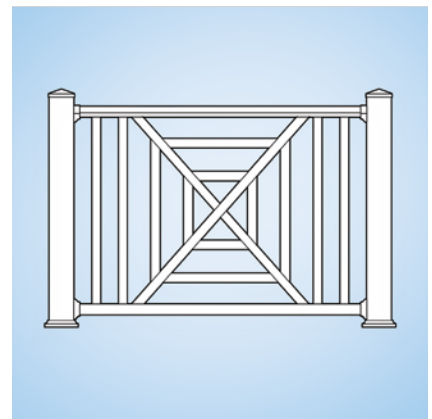

SINGLE CARIBBEAN

Note: Railing Support included with all 5' - 10' sections. Crossover Sections (10' - 16') include two Railing Supports.

TRX MOUNTS & ACCESSORIES

HIDDEN SCREW RAIL MOUNTS

STANDARD WALL MOUNTS:

1-4 pack is included inside each boxed railing section.

A 4 pack contains (2) top mounts, (2) bottom mounts, and screws.



Top Rail Mount



Bottom Rail Mount

STANDARD STAIR MOUNTS:

1-4 pack is included inside each boxed stair railing section.

A 4 pack contains (2) top mounts, (2) bottom mounts, and screws.



Top Stair Mount
(factory pre-cut)



Bottom Stair/
Angle Mount

OPTIONAL SPECIALTY MOUNTS:

These mounts are not included with boxed sections.

A 4 pack contains (2) top mounts, (2) bottom mounts, and screws.



Top Stair/
Angle Mount (uncut)



Bottom Stair/
Angle Mount




Top 45° Mount
(factory pre-cut)



Bottom 45° Mount
(factory pre-cut)

For Stair Racking information visit polyrail.com

8" AND 10" ROUND COLUMN ADAPTERS



Not Available in 6"

RAIL SUPPORTS




TRX GATES & HARDWARE




Baluster Style	Gate Size (width x height)			
	36" x 36"	48" x 36"	36" x 42"	48" x 42"
Standard Baluster	•	•	•	•
"A" Series Baluster	•	•	•	•
"B" Series Baluster	•	•	•	•

RESIDENTIAL HINGE

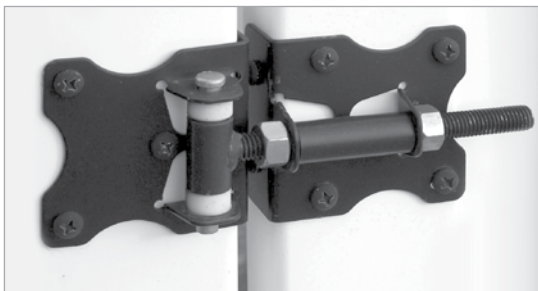

RESIDENTIAL LATCH

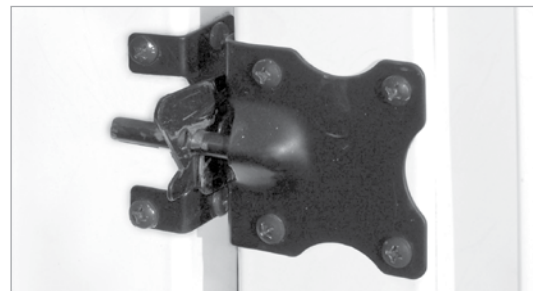

White

Tan

Mocha

Black



T-BIRD VINYL RAILING



T-BIRD RAILING



STANDARD BALUSTER

1-3/8" x 1-3/8" Square Vinyl
3-1/2" Baluster Spacing

White

Tan




"A" SERIES BALUSTER

1-3/8" x 1-3/8" Decorative Vinyl
3-1/2" Baluster Spacing
42" Balusters are Aluminum Reinforced

White

Tan

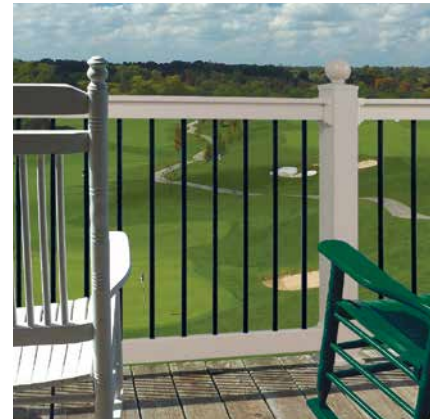

"B" SERIES BALUSTER

3/4" Round Aluminum
3-7/8" Baluster Spacing
See Page 16 for Baluster Colors

White

Tan

Section Type	Length										Height		Baluster Style		
	4'	5'	6'	7'	8'	9'	10'	12'	14'	16'	36"	42"	Std	A	B
Straight	•	•	•	•	•	•	•				•	•	•	•	•
Stair	•	•	•	•	•	•	•				•	•	•	•	•
Crossover - Straight								•	•	•	•	•	•	•	•
Crossover - Stair					Not Available						Not Available		Not Available		
Single Chippendale - Straight	•	•	•	•	•	•	•				•	•	•		
Double Chippendale - Straight				•	•	•	•				•	•	•		
Chippendale - Stair					Not Available						Not Available		Not Available		



CROSSOVER



DOUBLE CHIPPENDALE

Note: Railing Support included with all 8' - 10' sections. 16' Crossover Sections include two Railing Supports.


T-BIRD MOUNTS & ACCESSORIES

HIDDEN SCREW RAIL MOUNTS

STANDARD WALL MOUNTS:

1-4 pack is included inside each boxed railing section.

A 4 pack contains (2) top mounts, (2) bottom mounts, and screws.



Top Rail Mount



Bottom Rail Mount

STANDARD STAIR MOUNTS:

1-4 pack is included inside each boxed stair railing section.

A 4 pack contains (2) top mounts, (2) bottom mounts, and screws.



Top Stair Mount




Bottom Stair Mount

OPTIONAL SPECIALTY MOUNTS:

These mounts are not included with boxed sections.

A 4 pack contains (2) top mounts, (2) bottom mounts, and screws.



Top/Bottom Angle Mount




Top 45° Mount



Bottom 45° Mount

For Stair Racking information visit polyrail.com

8" AND 10" ROUND COLUMN ADAPTERS



Not Available in 6"

RAIL SUPPORTS




T-BIRD GATES & HARDWARE




Baluster Style	Gate Size (width x height)			
	36" x 36"	48" x 36"	36" x 42"	48" x 42"
Standard Baluster	•	•	•	•
"A" Series Baluster	•	•	•	•
"B" Series Baluster	•	•	•	•

RESIDENTIAL HINGE

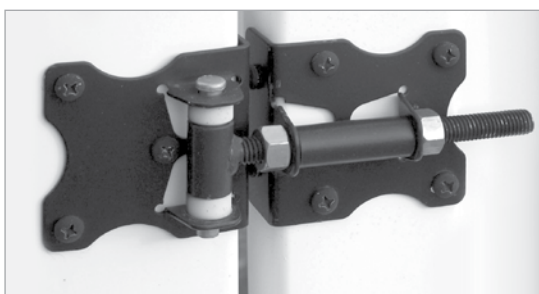

RESIDENTIAL LATCH

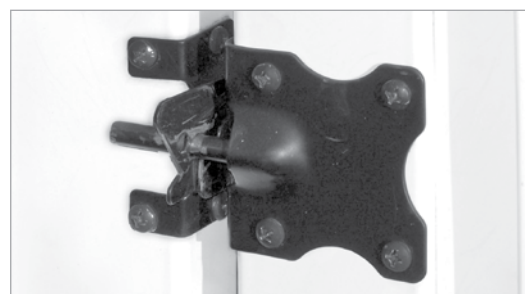


White

Tan

Black

STANDARD VINYL POSTS

VINYL POSTS

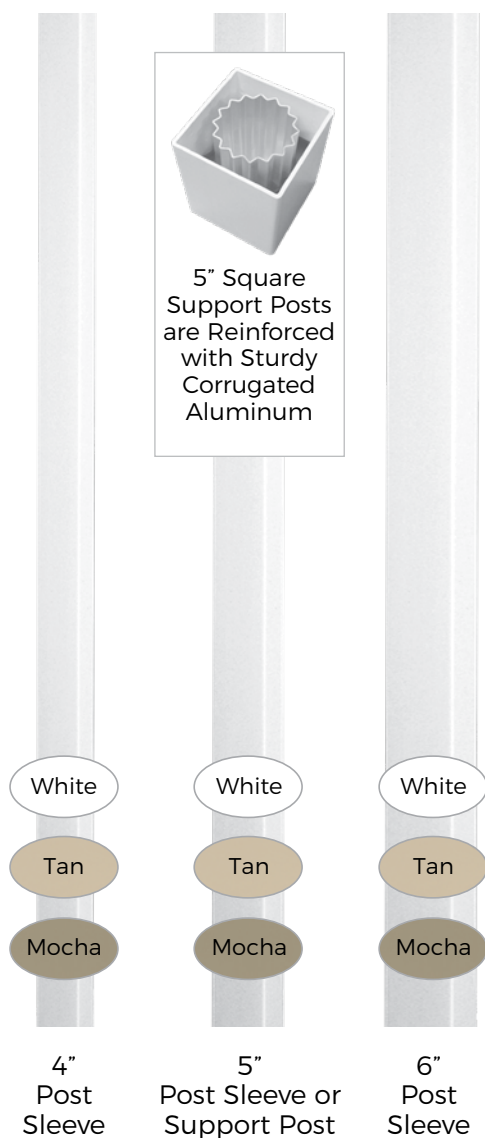


VINYL POST CAPS




MAGENA STAR

Magenta Star Ornamental Low Voltage and Solar Lights. Visit magenastar.com for more information and to see additional styles.

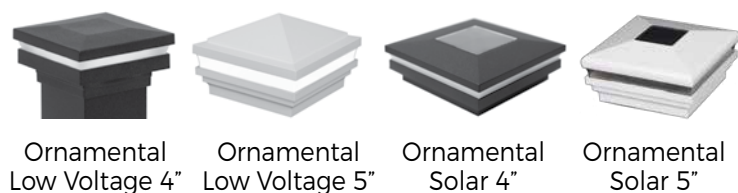

VINYL POST FLAIRS

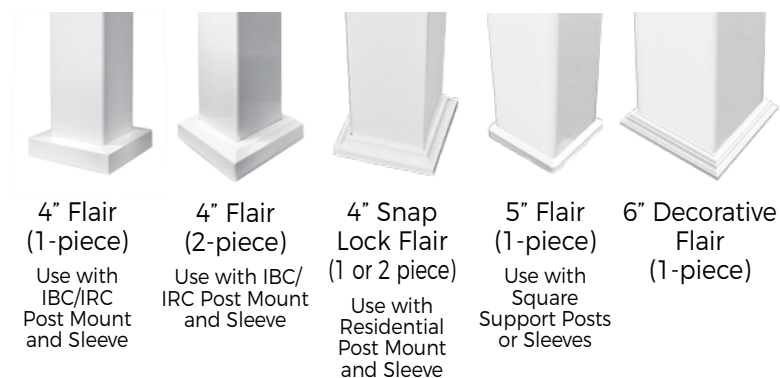


VINYL POSTS SPECIFICATIONS

	4" Post Sleeve	5" Post Sleeve	5" Support Post	6" Post Sleeve
Heights	38", 44", 48", 54" 8', 9', 10'	38", 44", 48", 54" 8', 9', 10'	8', 9', 10'	38", 44", 48", 54" 10'
Load Capacity	Non-Load Bearing w/o Wood Post	Non-Load Bearing w/o Wood Post	8' = 12,000 lb.	Non-Load Bearing w/o Wood Post

POST MOUNTS & KITS

4" RESIDENTIAL ADJUSTABLE ALUMINUM POST MOUNTS

Requires 4" (.160" Wall)
Post Sleeve.



Top View

Powder coated base plates
resist corrosion and ACQ
wood treatment.



Angle Adjustment
Leveling Bolts



Heavy-Duty Standard

TOP AND BOTTOM POST MOUNTS



5" Top & Bottom
Hurricane Mount
Set (Included
with all 5" Square
Support Posts)



Optional
4" Top and
Bottom Post
Mount Plates



TRX BOXED POST KIT

5 Options Available:

1. Without Aluminum Post Mount
2. With IRC Post Mount
3. With IBC Post Mount
4. With Residential Heavy Duty Post Mount
5. With Residential Standard Post Mount

Includes:

- 4" x 4" Vinyl Post
- Post Mount (optional)
- Flat or Trim Cap
- Post Flair


4" IBC AND IRC POST MOUNTS

IBC (HEAVY DUTY) POST MOUNTS:

- IBC Approved
- 3.62" Tube
- .060" Wall
- ½" x 5½" square plate with 8 fasteners
- Shims and leveling bolts included



Top View




43" IBC
Post Mount
Available in
37", 43", 47"
& 53" lengths



37" IRC
Post Mount
Available in
37", 43", 47"
& 53" lengths

IRC (STANDARD) POST MOUNTS:


- IRC Approved
- 3.62" Tube
- .060" Wall
- ¼" x 5½" square plate with 4 fasteners
- Shims and leveling bolts included



Requires 4" (.135" Wall) Post Sleeve
Note: 5" and 6" Post Mounts available.
Contact Customer Service for information.

"A" SERIES DECORATIVE VINYL POSTS

POSTS

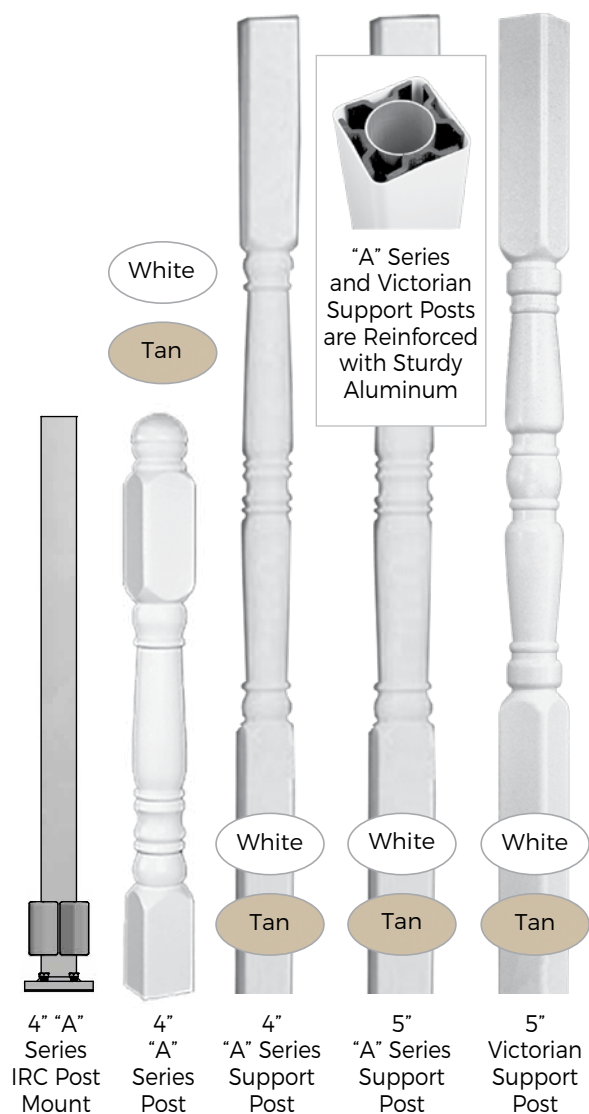


CAP




"A" Series Decorative Post Caps are Easily Attached with Vinyl Adhesive

Cap is Included with Post

FLAIRS

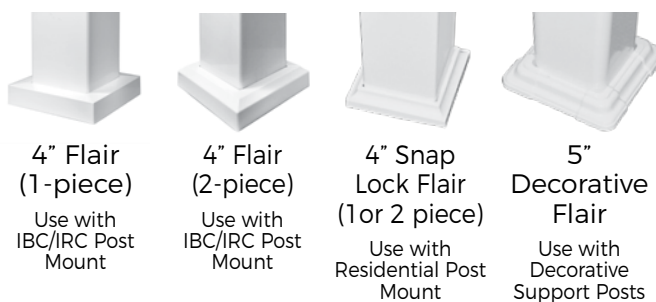

SUPPORT POST MOUNTS

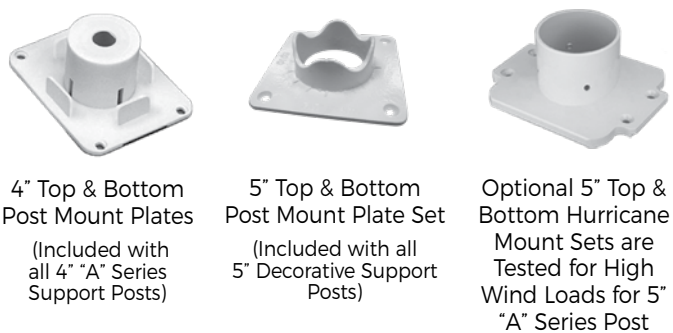


POSTS SPECIFICATIONS

	4" "A" Series Post	4" "A" Series Support Post	5" "A" Series Support Post	5" Victorian Support Post
Heights	38", 44", 48", 52"	9'	9', 10'	9'
Load Capacity	Non-Load Bearing w/o Aluminum Post Mount	3,900 lb.	9' = 7,520 lb.	9' = 7,520 lb.

COLUMN CLAD VINYL POST WRAPS

STYLES

The Wood Post Supplies Load Capacity



Ratchets to
Lock Together



Wraps Around
the Wood Post –
No Screws Needed



Smooth



Fluted
(Special Order)

CAP



Column Clad Cap
4", 6"

FLAIR



Column Clad Flair (4-piece)
4", 6", 8"

SPECIFICATIONS

	4" Smooth Column Clad	6" Smooth Column Clad	4" Fluted Column Clad	6" Fluted Column Clad	8" Fluted Column Clad
Heights	8'6", 10'	8'6", 10'	8'6", 10' (Special Order)	8'6", 10' (Special Order)	10' (Special Order)
Load Capacity	Non-Load Bearing w/o Wood Post	Non-Load Bearing w/o Wood Post	Non-Load Bearing w/o Wood Post	Non-Load Bearing w/o Wood Post	Non-Load Bearing w/o Wood Post

"B" SERIES ALUMINUM POSTS

See Page 16 for Color Options

POSTS



4" Post Sleeve
(.065" wall)


4" Post w/Plate
(.090" wall)

6" Post w/Plate
(.090" wall)

4" Support Post
(.090" wall)

6" Support Post
(.090" wall)

CAPS




Flat Cap
4" & 6"



Ball Cap
4"

FLAIR

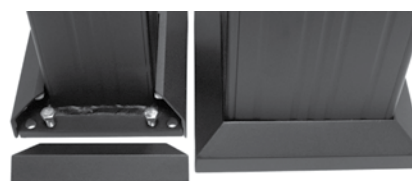

Post Flair (2-piece)
4" & 6"

TIE DOWN BRACKET



Tie Down Bracket
with Cover
(Set of 2)

Installation
Instructions
Require 2 Sets
per Support Post

"B" SERIES POSTS SPECIFICATIONS

	4" "B" Series Post Sleeve	4" "B" Series Post w/Plate	6" "B" Series Post w/Plate	4" "B" Series Support Post	6" "B" Series Support Post
Heights	38", 44", 48", 54"	38", 44", 48", 54"	38", 44", 48", 54"	8', 9', 10'	8', 9', 10'
Actual ASD Load Bearing Capacity	Non-Load Bearing w/o Wood Post	Non-Load Bearing	Non-Load Bearing	8' = 13,531 lb. 9' = 12,751 lb. 10' = 11,970 lb.	8' = 16,543 lb. 9' = 16,543 lb. 10' = 16,543 lb.

CHR


Continuous Handrail ALUMINUM

ADA COMPLIANT HANDRAIL



A variety of rail lengths and accessories complete this system.
Available in 8', 10', & 16' Rail Lengths.
Available in all the colors shown on page 16.



STAIR APPLICATION

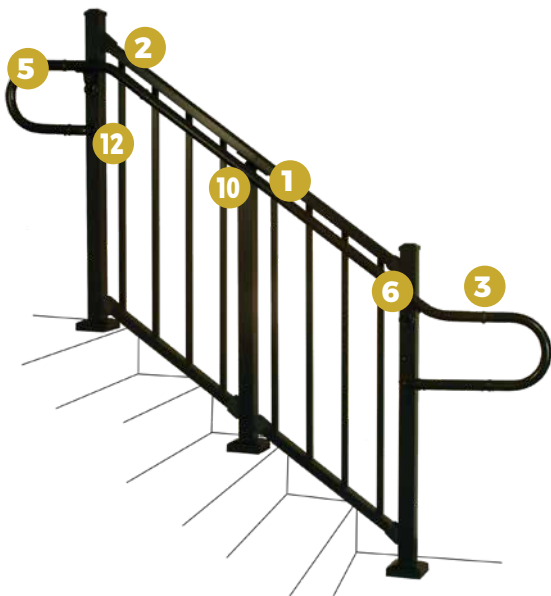

DECK APPLICATION

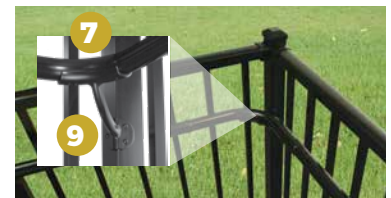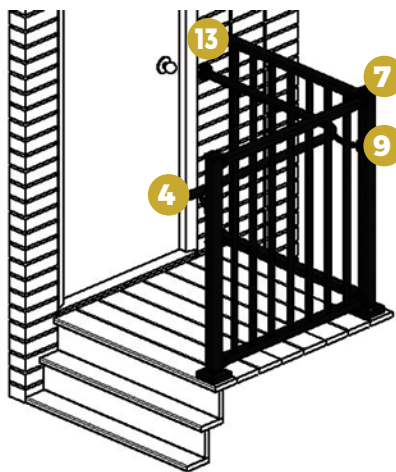


Inside Corner Mount
& 90° Elbow Detail



Extended Wall Mount Detail



90° Welded Elbow Detail

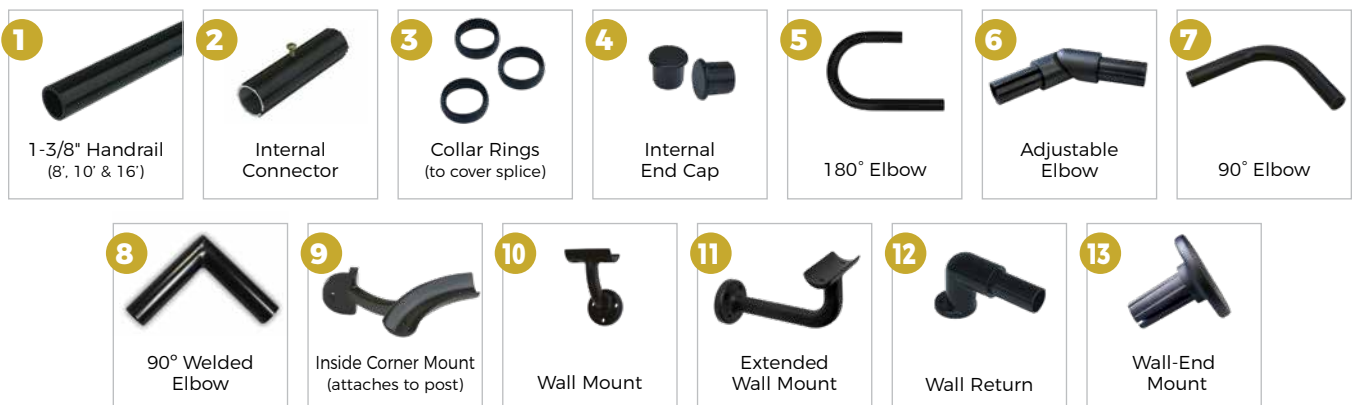

VINYL AND ALUMINUM COLORS

VINYL COLORS

DSI Vinyl Products are available in three colors. Our Mocha color is available for **select** products, please see individual product pages for availability.



White



Tan



Mocha

ALUMINUM COLORS

DSI Aluminum Products are offered in 12 standard AAMA 2604 colors. Custom colors and AAMA 2605 colors are available by special order.

Colors shown are a close representation of the true color.

Please consult actual samples for accurate powder coating colors.



Satin Black



Black Fine Texture



Ninety Bronze



Bronze Fine Texture



Gloss Beige



Gloss White



White Fine Texture



Brown Fine Texture



Speckled Walnut



Sandy Shore



Chocolate



Silver


POWDER COATING PROCESS

EXCLUSIVE DSI POWDER COATING PROCESS

DSI's aluminum Powder Coating offers an uncompromising quality created by state-of-the-art technology. Our system provides the highest quality powder coating on the market with a lifetime limited warranty giving you peace of mind in your investment.




1 The raw premium-grade aluminum is inspected to be free of blemishes and is not exposed to the outdoor elements.

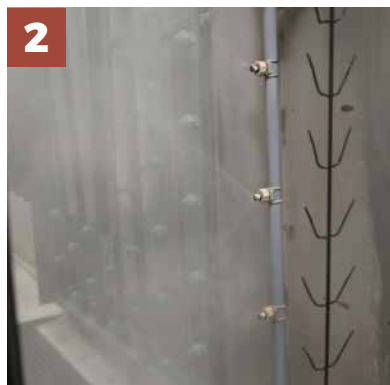

2 The product enters a heated acidic cleaning stage to remove extrusion debris and fabrication oils.



3-6 **Clean:** City water rinse.
Cleaner: Recycling reverse osmosis water rinse
Cleanest: Pure reverse osmosis water rinse
Sealer: Dried-in-place aluminum sealer

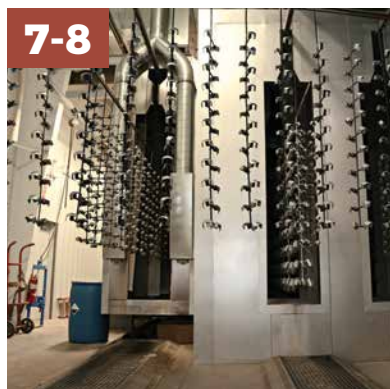

7-8 A 200 MPH air blast removes water drops from the pre-treated aluminum. A convection oven completes the dry-off process.



9 Powder is applied with 18 automated and 2 manual spray guns. Compressed process air is dried to -35°F Dew Point for superior adhesion.



10 The powder coating is then bonded and adhered to the aluminum substrate in a 400 degree cure stage.

DSI FAMILY OF PRODUCTS



polyrail.com



We have tried to make this catalog comprehensive and factual. We reserve the right to discontinue at any time, without notice, colors, materials, equipment and availability. Since some information may have been updated since the time of printing, we are not responsible for typographical or pictorial errors. Materials shown may vary slightly from actual colors. ©Digger Specialties 2019/02 99677