



C I F F A R T





At Pexco, Davidson Traffic Control Products
we are passionate in our pursuit of excellence and dedicate ourselves to the very best quality in everything we do. We are always developing new products, being aware of the ever-changing market conditions and need for improved safety. Our long history of creating solutions to help make our roadways safer is just one facet of Pexco's ongoing commitment to innovation and leadership in the markets we serve. We look forward to serving you in the year ahead!

Table of Contents

Adhesive Application Chart 23

Adhesives and Anchors 22

Barrier Reflectors 15

Barricades, Type II and Type III..... 16

Base Options for FG 300 Posts..... 8

Bicycle Safety Products 9

Baby Road Markers 21

City Post®..... 4-5

DP 200 Round Channelizer Posts 12

Enhanced Linear Delineation (ELD)..... 13

FG 300 Ground Mount Delineator Posts 11

FG 300 Surface Mount Channelizer Posts..... 6

FTGM Ground Mount Delineator Posts 11

Flexible Roadside Delineator Posts..... 10

Green Cross - Crosswalk Safety Products 18

Guardrail Reflectors..... 14

Interstate Grade Curb System 7

Island Alert Curb Reflectors..... 13

“O-Frame” Parade-Style Barricade..... 16

Parking Lot Sign and Base System 19

Raised Rumble Strips..... 21

Self-Righting Vertical Panels 19

Sign Post Reflectors..... 19

Super TOM / Super TRPM 21

Snow Poles and Posts 10

Temporary Pedestrian Access Route (TPAR) Barricade 17

TSM/FTSM Surface Mount Posts..... 8

Turnpike Grade Curb System 7

Type III Barricades..... 16

Work Zone Pavement Markers 20

Thank you for your interest in Pexco, Davidson Traffic Control Products! We are pleased to introduce our Engineering Support website, **CADdetails**.

Please visit our listings at www.CADdetails.com for information on our traffic control products and access to free, downloadable files which allow designers and engineers to place Pexco / Davidson products right into traffic control plans and contracts. Engineering drawings are available in five formats: AutoCAD DWG, Adobe PDF, AutoCAD DWF, Printable CAD, and VectorWorks VXD.

To use this free service:

1. Go to CADdetails.com, a web-based service of AutoCAD
2. In the “Quick Search” box, enter the word “Pexco” and click on “Pexco, Davidson Traffic”
3. A list of products is displayed or you can choose “Click Here for Products and Listings”
4. Click on your product of interest (i.e. City Post)
5. A window will open, prompting first time users to register
6. Under each product, the following information is available:
 - a. ABOUT – general features, advantages and benefits
 - b. MEDIA – download product information sheets
 - c. CAD and 3D Downloads – detailed product CAD drawings for inclusion in bids and contracts. “Drag and drop” engineering drawings directly into your plans using “i-drop”
 - d. SPEC – material specifications for use in bids and contracts
 - e. ASK A QUESTION – creates an email from registered users to Pexco requesting additional information

This service is free to all registered users. If you have questions, feel free to contact us; we will be happy to assist.

Thank you for your interest in Pexco, Davidson Traffic Control Products.



Pexco® is a leading manufacturer of recycled traffic control products





Barrier Delineation

ELD – Enhanced Linear Delineation	13
PCBMs	15
PCBMs with Gator Jaws Hinge	15



Bike Lanes/Cycle Tracks

City Post	4-5
FG 300 Posts	6
DP 200 Posts	12



Channelization

City Post	4-5
FG 300 Posts/FG 300 Curb Systems...	6-7
TSM/FTSM Surface Mount Posts.....	8



Guardrail Delineation

Delineator Posts	10
ELD – Enhanced Linear Delineation	13
Guardrail Reflectors.....	14



Managed Lanes/HOT Lanes

City Post	4-5
FG 300 Posts	6
FG 300 Curb Systems.....	7



Older Driver Safety

Island Alert	13
Sign Post Reflectors.....	19
ELD – Enhanced Linear Delineation	13



Pedestrian Safety

O-Frame.....	16
TPAR.....	17
Crosswalk Safety Products	18



Run-Off-the-Road Mitigation

Roadside Delineators	10
FG 300/FTGM Ground Mount Posts	11
ELD – Enhanced Linear Delineation	13



Work Zone Safety

Type III Barricades.....	16
FG 300 Posts.....	6
Work Zone Pavement Markers	20



City Post®

Pexco's City Post is the highest-performing channelizer post on the market today.

The City Post remains flexible, even at extremely high and low temperatures, and returns to a full upright position even after 100 impacts at 70 mph / 112 km/h.

The City Post was created using advanced engineering resins to provide maximum strength and superior durability. The solid, single unit polyurethane construction absorbs impacts and rebounds instantly.

Testing and Certificates:

Texas A&M Transportation Institute (TTI)

- 100+ impact **NTPEP** test at 70 mph / 112 km/h
- Less than 3 degrees off vertical
- Not a single failure
- **EN 12767 Passive Safety Certified**
- **MASH-16** – compliant
- **MUTCD** – compliant
- **NCHRP 350** accepted

Three styles to cover all installation requirements: Embedded Anchor Cup (EAC), Surface Mount (SM), or Glue Down (GD).

- Quick, sharp rebound
- 3" round post with a slim, sleek profile
- Thermoplastic Polyurethane for high impact resistance and quick, sharp rebounds
- Minimizes worker exposure
- No mechanical springs to fail
- 360° of reflectivity
- 72% reduction in life cycle cost
- 90% reduction in worker risk
- Choose white, yellow, fluorescent orange, or black (custom colors available)
- UV resistance keeps the City Post looking fresh and new after prolonged periods in the elements


Applications for the City Post include:

- HOT and HOV Lanes
- Dangerous Curves
- Toll Plazas
- Bike Lanes
- Parking Lots
- Airports
- Gore Areas
- Traffic Circles
- Pedestrian Walkways

City Post Options

Reflective sheeting options
Choose your configuration:

Lengths

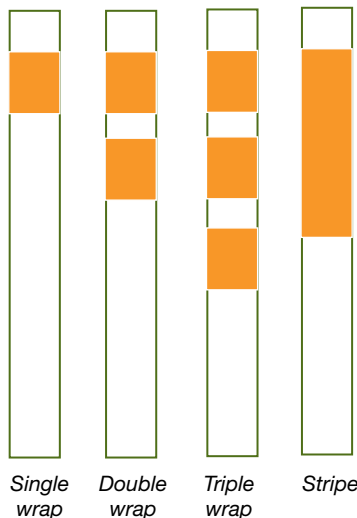

City Post Family of Posts - Model Comparison			
Post Model	SM	GD	EAC
Rating	Best	Best	Best
Standard Colors	White, Yellow, Fluorescent Orange, Black		
Impacts @ 70 mph	100+	100+	100+
Anchoring	Bolts	Epoxy	Anchor cup






Original City Post EAC with Embedded Anchor Cup

- Easy “spin-in” installation
- Installs in concrete or asphalt
- Available with 2” or 4” anchor cups
- Optional threaded cap for a flush pavement surface when post is removed
- Non-protruding base is ideal for bike lanes and pedestrian pathways



City Post SM Surface Mount

- 72% reduction in life cycle cost
- 90% reduction in worker risk
- 1-piece construction
- Quick, sharp rebound
- Bolt-down installation
- No mechanical springs to fail
- Installs in concrete or asphalt
- Minimizes worker exposure
- Maximizes public safety
- 360° reflectivity

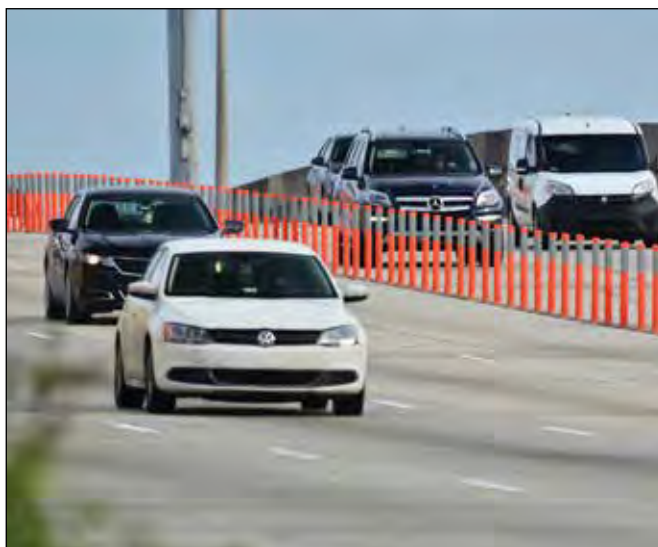

City Post GD Glue Down

- No drilling, faster installations
- Installs on concrete or asphalt
- Exclusive “pinwheel” base
- Installs with road marker epoxy
- 1-piece construction
- Glue down installation
- No assembly required
- No springs to fail



FG 300 Surface Mount Channelizer Post



FG 300 Surface Mount Channelizer Posts

The clover-leaf design of the FG 300 tubular marker provides far better rebound than simple round tubes. The curving of the sides of the FG 300 tube changes the moment of inertia and builds up tremendous potential energy, resulting in a quick and sharp rebound after impact.

The FG 300 is offered in three grades:

- Model PE for general applications
- Model UR, the industry workhorse
- Model EFX for your toughest installations

All three grades are compatible with our full line of bases (page 8) and FG 300 Curb Systems (page 7).

No metal pins in bases to rust or seize – simple installation and replacement of damaged posts.



Testing and Certificates:

- Proven durability on the **NTPEP** and **TTI** test decks
- NTPEP Reports #TTCD 6020.1 and 6021.11
- **EN 12767 Passive Safety Certified**
- **MASH-16** – compliant
- **MUTCD** – compliant
- **NCHRP 350** accepted

FG 300 Family of Posts - Model Comparison			
Post Model	PE	UR	EFX
Rating	Good	Better	Best
Standard Colors	White, Yellow, Fluorescent Orange, Black		
Impacts @ 60 mph	15+	50+	60+
1-Year Warranty	—	—	Yes



FG 300 Top Cap options

Locking Pin Removal Tool

- Posts available in white, yellow, fluorescent orange, and black; custom colors available
- Black or matching color bases (see page 8)
- Mounts with butyl pads, hot melt bitumen, epoxy, Super Bundy®, or FG 300 anchor bolts (see page 22)



FG 300 Grade Curb Systems



Interstate Grade Curb (IG)

The FG 300 Interstate Grade (IG) Curb System is a lane separation system that provides efficient and cost-effective channelization of traffic on freeways, toll-ways, city streets and rail-highway at-grade crossings. This one-piece curb system links together for a continuous “picket fence” effect and consists of modular raised curb sections mountable by emergency vehicles. The Interstate Grade Curb System features our FG 300 UR and EFX posts, two of the toughest channelizer posts on the market.

Testing and Certificates:

- **MASH-16** approved TL3 (FHWA Letter WZ-361)
- **NCHRP 350** accepted (FHWA Letter WZ-193)
- **MUTCD** – compliant

- Low maintenance; super-tough FG 300 polyurethane posts
- Curb sections install in just minutes with one person
- Installs with 4 bolts, or adhesive for temporary projects
- Design allows for curved or circular installations for roundabouts




Turnpike Grade Curb (TG)

The FG 300 Turnpike Grade (TG) curb system is a raised lane separator with durable upright channelizer posts that provide efficient and cost-effective channelization of traffic on Managed Lanes, 2-way 2-lane Work Zones and other areas where discontinuous channelization is desired. The “picket fence” effect divides lanes going in the same direction or opposite directions in high-speed, high-volume applications where continuous curb is too costly or not needed. Use where pavement markings alone are not sufficient to safely channelize traffic.

- Low maintenance; super-tough FG 300 polyurethane posts
- Engineering polymer alloys for superior toughness at all temperature extremes
- Engineered to stand up to the toughest of conditions
- Only requires 4 bolts per unit, quick and easy to install
- Installs with bolts, or adhesive for temporary projects

Testing and Certificates:

- **MASH-16** approved TL3 (FHWA Letter WZ-362)
- **NCHRP 350** accepted (FHWA Letter WZ-282)
- **MUTCD** – compliant

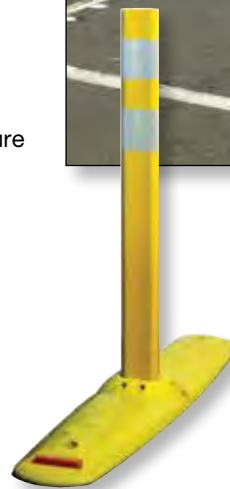

Applications for the FG 300 Curb Systems include:

- Rail-highway “Quiet Zone” crossings
- Acceleration lanes
- Left-Turn restrictions
- Through lane protection in busy urban areas
- Lane separation in 2-way 2-lane detours
- Traffic calming, roundabouts and traffic circles
- Toll plazas



TSM / FTSM Markers / Base Options for FG 300 Posts



The TSM series are general-purpose channelizer products, designed and built to meet MUTCD standards and easily pass the Standard NTPEP Test protocol. Ideal for use in cities, parking structures or other areas where roadway safety hazards exist.

The post is 2³/₈" diameter, with multiple lengths and colors available.

Key Features

- Meets MUTCD standards
- 360° visibility on the TSM
- 180° flat visibility on the FTSM
- All plastic construction
- NTPEP protocol tested, NCHRP 350 and MASH-16 compliant
- 8" Round High-Impact Black Plastic Base
- Kit includes channelizer, hinge, and base

Standard colors: White, Yellow and Orange.

Special order colors available with minimum order

Standard Lengths 36" or 48" tall

Reflective Tape – Any standard flexible tape from the major manufacturers.

Tape configurations are separate line items added to the channelizer pricing.

	Orange	White	Yellow
Tubular Surface Mount	TSM36O or TSM48O	TSM36W or TSM48W	TSM36Y or TSM48Y
Flat Top Tubular Surface Mount	FTSM36O or FTSM48O	FTSM36W or FTSM48W	FTSM36Y or FTSM48Y

All FG 300 Bases mate with all three grades of FG 300 posts – PE, UR and EFX



FG 300 Lite Black Base

Standard black surface mount base with quick release pins for general purpose applications. Mounts with butyl pads, hot melt bitumen, epoxy or FG 300 anchor bolts.



FG 300 Heavy Duty Colored Base

Extra tough colored base increases the visibility of post by 15%. Available colors match our posts: yellow, white, fluorescent orange, and fluorescent yellow-green for added visibility. Mounts with butyl pads, hot melt bitumen, epoxy or FG 300 anchor bolts.



FG 300 Metro Base

A surface mount base for the FG 300 posts where space is at a premium. It is a slimmer version of our standard 8 inch round surface mount base that is ideal for curbs, narrow roadways, tunnels, ferry terminals, and parking garages. Mounts with butyl pads, hot melt bitumen, epoxy or FG 300 anchor bolts.

The Metro Base is available in white, yellow, fluorescent orange and green.



The Need for Safer Bicycle Lanes

Cities across the country are making more room for the cyclist population a priority. The motivation is fueled by the need to reduce congestion and improve overall safety for all who use our nation's roadways.


Separated bike lanes have been shown to be safer than biking in the street and more likely to encourage biking. State-of-the-art designs are being implemented nationwide to create separated spaces for cyclists. Channelizing posts are an important tool in the "cycle track" tool box.

Bicycle Friendly Posts Offer High Performance, Durability and Improved Safety

For traffic engineers designing bike tracks, tubular markers are an invaluable tool to prevent cars from encroaching on bike lanes. They can also alert and slow down drivers and cyclists as they approach a hazardous intersection.

Pexco's polyurethane posts are both tough for long life and forgiving for cyclists. They are soft and pliable. They have proven durability and long life resulting in reduced maintenance costs.

Pexco's FG 300 UR, EFX and City Posts are offered in a variety of configurations to improve bicycle safety.

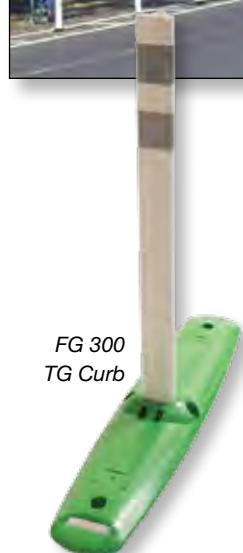

The Benefits of Bicycle Friendly Posts for Bike Lanes:

- Provides clear delineation and physical separation
- Highly visible day and night
- Reduces vehicle entry
- Improves cyclist and pedestrian safety
- Allows for emergency vehicle access
- Recognized traffic control device
- Low maintenance

For more information on Bike Lane Safety Products, including links to helpful resources like the FHWA's Separated Bike Lane Planning and Design Guide, visit www.pexco.com/traffic.



Flexible Roadside Delineators / Snow Poles



Flexible Roadside Delineator Posts

These driveable flexible guide posts for roadside delineation are made of recycled engineering polymers to withstand repeated impacts. They resist discoloration when exposed to UV rays and will not rust, rot or splinter. They offer strength, flexibility and durability to stand up in the harshest weather conditions.

Testing and Certificates:

- **NTPEP** tested (NTPEP Report 96-124)
- **NCHRP 350** accepted (FHWA Letter SS-71)
- **MASH-16** – compliant
- **MUTCD** – compliant



FG 400
profile



FG 500 and
Fantasma profile

- The FG 400 and 500 posts can be cut to any length; three standard colors: white, yellow and gray, other colors by special order
- The single curve profile of the FG 500 provides maximum display area for vertical messages visible from wide angles
- The double curve FG 400 provides more rigidity to reduce fluttering in the wind

- For tighter budgets, consider the Fantasma post, a PVC post with the FG 500 profile
- Factory-applied reflective sheeting for nighttime visibility
- Message decals are available and can be applied at the factory



Roadside delineator posts are used for marking roadway shoulders, guiding snow plowing operations and marking utility line locations.

In North America, highways are marked with yellow posts on the left, and white posts on the right. In snow country, the beginning of a run of guardrail can be marked with a red post, and the end of the run marked with a green post. These color-coded posts provide added visibility to snow plow operators, limiting damage to the guardrails.

FG 500 posts for marking utility lines are available in additional APWA colors: Red (power), Orange (telecom), Blue (water), Purple (irrigation) and Green (sewers).



Snow Poles and Posts

Snow removal presents some unique problems, especially at night, dusk and dawn. These highly visible fluorescent guides help plow operators avoid hazards and reduce damage to fixed objects.

Pexco's Snow Poles and Posts are cost-effective, more durable than wood or PVC pipe, and can be used wherever bright, effective roadside markings are needed.



- Exclusive honeycomb cross-section provides great strength and keeps poles lightweight
- Round poles in six vivid UV stabilized colors are highly visible
- Reflective sheeting can be applied for increased night visibility
- Applications: marking fire hydrants, culverts, junction boxes and drains; setting snowmobile trails and cross-country ski trails; supporting banners and signs; securing snow fences, delineating lift lines

FTGM and FG 300 Ground Mount Delineator Posts

Flat Top Ground Mount FTGM

The FTGM series are general-purpose delineators, designed and built to meet MUTCD standards and meet Standard NTPEP Test protocol. This is a perfect delineator for use on roadway shoulders. Steel anchor provides a reusable anchor point in the event replacement is needed.

The post is 2³/₈" in diameter, sold as a complete kit consisting of the delineator, hinge, and steel anchor.

Key Features

- Meets MUTCD standards
- 180° flat visibility on the FTSM
- All plastic construction
- NTPEP protocol tested, NCHRP 350 and MASH-16 compliant
- 18" Steel Ground Anchor
- Easy install and replacement

Standard colors: White, Yellow and Orange.
Special Order Colors – with minimum order

Standard Length 48" tall

Reflective Tape – Any standard flexible tape from the major manufacturers. Tape configurations are separate line items added to the delineator pricing.



	Orange	White	Yellow
Flat Top Tubular Ground Mount	FTGM48O	FTGM48W	FTGM48Y

FG 300 Ground Mount Delineator Posts


The FG 300 Ground Mount delivers durability, low maintenance and quick replacement with a clover-leaf design that provides far better rebound than simple round tubes.

The unique polyurethane coupler connecting the upright tubular post to the steel anchor can take an impact from any direction and still keeps the post upright and functional. It has been proven to withstand multiple high speed impacts on the NTPEP Test Deck.

Combine ease of replacement, the geometry of the FG 300 and polyurethane – the toughest flexible engineering polymer – and the result is a roadside post that sets new standards for durability and convenience.

Testing and Certificates:

- **NTPEP** tested (Report # TTCD 6025.5)
- **MASH-16** – compliant
- **NCHRP 350** accepted
- **MUTCD** – compliant

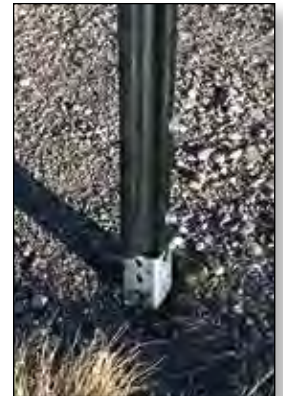

Benefits of FG 300 Ground Mount

- Simple – single pin allows for quick and easy replacement of damaged posts
- Durable and practical – 2-part system uses a permanent anchor and replaceable upright post
- Easy to install - can be driven by hand or machine using common tools
- Convenient – anchor is a widely available 2-inch square steel tube

DP 200 Round Channelizer Post



DP 200 Round Channelizer Posts

These 3-inch round polyurethane posts are highly visible, day and night. They clearly delineate driving lanes with bright colors and reflective sheeting. To reduce the risk of accidents, place DP 200 posts at critical points along your roadways where safety hazards exist.

The DP 200 remains flexible, even at extreme temperatures, and returns to an upright position after impact.

Testing and Certificates:

- **NTPEP Tested** (TTCD 6024.1)
- **NCHRP 350** accepted
- **MASH-16** – compliant
- **MUTCD** – compliant
- **EN 13422 Certified**



- Durable thermoplastic polyurethane for high impact resistance from all directions
- 360° of reflective visibility
- Available up to 39 inches (1 meter) tall
- Simple installation and low maintenance – no metal parts to rust or seize
- UV Stabilized polymers
- Applications include: Traffic islands, dangerous curves, work zones, parking lots, airports, gore areas, highway railroad intersections and traffic circles

Standard surface mount base with quick-release pins for general purpose applications. Mounts with butyl pads, hot melt bitumen, epoxy, Super Bundy®, or FG 300 anchor bolts (see page 22). Available in yellow, white, fluorescent orange and black.





Flexible design wraps around any median

Island Alert Curb Reflector

The Island Alert Curb Reflector is a low-cost safety solution designed to improve the visibility of raised islands, median noses, pedestrian refuges and similar roadway features.

The Federal Highway Administration recommends that all curbs at intersections, including median islands and other raised channelization, be delineated. The exceptional retro-reflectivity of Island Alert markers provides a clear visual cue to the motorist of the full-radius of raised medians, reducing accidents and improving safety.

This simple device can be applied to almost any median nose shape or configuration due to its narrow, flexible design.

Benefits of Island Alert

- Visible – continuous ribbon of reflectivity
- Simple – prime, peel & stick application
- Practical – low-cost safety solution improves roadway safety
- Flexible – notched foot allows installation to match curvature
- Durable – UV-stable flexible polyurethane for long life in the field



*Butterfly Glue-on
(also available in
Bolt-on style)*



Hi-Viz Flex Tab

Enhanced Linear Delineation (ELD)

Quickly provide linear delineation of concrete barrier walls or steel guardrails with reflectors from Pexco. A closely spaced row of Pexco's reflectors creates a "ribbon of light" to alert drivers of approaching curves.

Built with high brightness sheeting, these devices help motorists see changes in the roadway alignment, especially beneficial at night and in adverse weather. Adding red sheeting on the back side of the reflector sends a "wrong way" message to errant drivers.

Benefits of Pexco's ELD

- Visibility – provides superior guidance to motorists
- Simple – fast and easy to install onto steel or concrete
- Economical – 50% reduction in material and labor costs




Guardrail Reflectors



Typical Applications include:

- W-beam guardrails
- Wood and steel guardrail posts
- Bridge approaches
- Hills, curves, gores, off-ramps

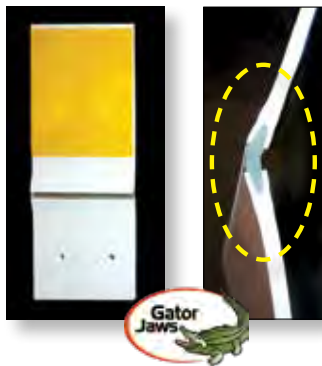

S-Flex

4" x 8.75" reflector with our unique "Gator Jaws" flexible polyurethane hinge that bends easily and bounces back. The S-Flex mounts to wood or steel guardrail posts. Designed for cold weather environments to prevent loss of reflective tape during subzero temperatures.



FG 427, 527

Both markers are 27 inches long and accommodate 36 square inches of sheeting. Can be mounted on guardrail posts positioning the reflectors 48 inches above the road surface.



Fat Cat

Oversized rigid guardrail marker measures 4"x15".

Guardrail Reflectors

Illuminate invisible guardrails at night with bright reflective markers that provide clear delineation. Pexco's guardrail markers are manufactured with engineering resins and are designed to endure the rigors of construction work zones and permanent installations. We can manufacture reflectors using any grade or color of reflective sheeting in order to meet your local requirements.

Ask for Pexco's Unique "Gator Jaws" Hinge!

Our exclusive "Gator Jaws" feature greatly increases the strength of flexible reflectors by adding a mechanical bond to the hinge, which provides 500% greater bonding surface area between the rigid base and the flexible polyurethane hinge. Even in extreme cold temperatures, the hinge remains flexible!

Available on our **I-Flex**, **U-Flex** and **S-Flex** Guardrail Reflectors.



Butterfly

Trapezoidal reflectors fit perfectly inside W-beam guardrails, and are available in two styles – Bolt-on and Glue-on. You can create a "ribbon of light" to more safely guide drivers at night by closely spacing Butterfly markers every 18 inches (see ELD on page 13).



Bolt On



Glue On



I-Flex

Fits over steel I-beam guardrail posts with "Gator Jaws" polyurethane hinge.





Concrete Jersey Barrier Reflectors

Pexco's PCBM (portable concrete barrier markers) are made of high-impact thermoplastics for long, maintenance-free life in the field. A variety of styles meet all your needs from high target value to impact resistance. We can manufacture reflectors using any grade or color of reflective sheeting in order to meet your local requirements.

Our exclusive "Gator Jaws" feature greatly increases the strength of flexible reflectors by adding a mechanical bond to the hinge which provides 500 % greater bonding surface area between the rigid base and the flexible polyurethane hinge. Even in extreme cold temperatures, the hinge remains flexible! Available on **T-9**, **T-12** and **T-16** (not shown) Barrier Wall Reflectors.

Typical Applications of PCBM's include:

Delineation of temporary or permanent concrete barrier walls, bridge parapets, or on top of wooden guardrail posts.



Hi-Viz Flex Tab

This flexible polyurethane marker mounts to median barrier walls. Available in white or yellow, 1 or 2-way reflective, with white, fluorescent yellow, orange or red "**Wrong Way**" prismatic sheeting, and factory-applied adhesive pad.



Big Dog

Extra large top mount reflector that features 96 square inches of prismatic sheeting.



Little Dog

A bit smaller than the Big Dog, but still provides incredible brightness with 72 square inches of reflective sheeting.



PCBM-15

Used for top mount installations in heavy snow regions because the 8 inch height places the reflector above the snow on the barrier wall.




PCBM-12

With over 12 square inches of reflective sheeting and the versatility of either top or side mount placement, this is our most popular marker!



PCBM-L16

16-inch tall reflector designed to be mounted on top of a standard 32 inch concrete barrier wall.



PCBM-T12

Barrier mount reflector featuring our "Gator Jaws" polyurethane hinge and 12 square inches of reflective sheeting.



PCBM-9

MUTCD compliant and economical barrier mount reflector that can be used for top or side mount delineation.



PCBM-9 HD

Center mount barrier reflector which houses our new 3 inch HOT Dot®.



PCBM-T9

A hinged marker with 9 inches of sheeting designed for use on top of moveable barrier systems.



Type III and O-Frame Barricades



Type III with the "Yeti" foot



X-Tube Upright

Type III Barricades

Type III barricades are very lightweight – only 22 pounds – easy to handle and have few parts to assemble. Pexco's T3B panels are virtually unbreakable.

Testing and Certificates:

- **MASH-16** approved TL3 (FHWA Letter WZ-380 & WZ-381)
- **NCHRP 350** accepted (FHWA Letter WZ-63, -77, -150, -151)
- **MUTCD** – compliant

Upright options:

- 1.75" lightweight plastic X-Tube (WZ-380)
- 1.75" steel PSST upright (WZ-381)

Barricade feet options:

- 5' angle iron powder-coated white foot (WZ-63, -77, -381)
- 5' galvanized steel 2" PSST foot (WZ-150, -380)
- "The Yeti" 40# recycled rubber foot (WZ-151)

Hardware options:

- Standard bolts, washers and lock nuts
- Anti-theft hardware
- Quick release pin



Type II configuration with 2 x 8" panels



Type I configuration



Type II configuration

"O Frame" Parade-Style Barricades

Instantly create an MUTCD-compliant Type I or II barricade.


O-Frame impact-resistant and UV-stable thermoplastic barricades are designed for low-speed municipal applications including crowd control, parking control and plank box utility closures. They are ideal for cordoning off an area during public events.

- Accommodates 1" or 2" plastic or wood panels
- Panels available in 4, 6, 8, 10 and 12-foot standard lengths
- Panels and legs available for purchase separately or together
- Legs stack for easy storage
- Choose Engineer, High Intensity or Prismatic sheeting

Testing and Certificates:

- **NCHRP 350** accepted (FHWA Letter WZ-180a)
- **MUTCD** – compliant

Barricade Panels

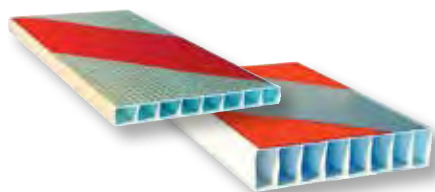

- Wide flat panels make application of reflective sheeting simple and fast
- Either panel can be used to build a Type III or Parade-style barricade
- Internal I-beams for a rigid, lightweight board that reduces sagging and warping
- UV-stabilized high density polyethylene
- Available blank or sheeted, single-sided, double-sided or Chevron style, 2' to 14'
- Available in orange/white or red/white for "dead end" roads

Temporary Pedestrian Access Route (TPAR) Barricades



TPAR Type II Pedestrian Access Barricade

TPAR Type II Barricades provide continuous guidance for all pedestrians in work zones.

Pexco's TPAR Type II Barricade is an ADA, MUTCD, NCHRP 350, and MASH-16 compliant temporary traffic control device. It provides safe, continuous guidance for pedestrians through urban work zones. Components are quick to assemble.

TPAR Temporary Barricades are UV-stabilized, offer superior strength and withstand all weather conditions.

- Top and bottom barricade panels come pre-drilled for easy assembly
- The barricades nest together for easy transport and storage
- The top rail provides an easy to follow hand guide
- The lower barricade rail allows for water drainage and acts as a guide for pedestrians who use a cane
- TPAR ADA hinge connects the barricade panels to create angles and corners
- When fully assembled, the TPAR barricade creates a very narrow footprint of only 15 inches deep!
- TPAR panels are available in white or fluorescent orange by special order
- Panels are available blank or with factory applied retroreflective sheeting, in lengths of 4', 6', or custom lengths
- Top and bottom barricade panels share a common vertical face with nothing protruding into the walkway, eliminating trip hazards

Testing and Certificates:

- **MASH-16** approved to TL3 (WZ-418)
- Meets 2009 **MUTCD** 6F.63, 6F.71 and 6F.74

Top View of Continuous Run



The top panel acts as a smooth continuous guide for the hand



The bottom panel acts as a detectable edge for pedestrians using canes



No part of the barricade protrudes into the walkway

Create Angles & Corners



Using the ADA Hinge



Create angles and corners



Utility Box

The ADA hinge seamlessly connects the barricade panels to create angles and corners.



Green Cross - Crosswalk Safety Products



The Green Cross Product Line

Pexco offers many options for improving crosswalk safety suited to meet your program and your budget:

- Self-righting White and Fluorescent Yellow Green (FYG) safety posts to highlight crosswalk areas
- Bases to secure safety posts to the roadway
- Highly reflective flags, signs and stop paddles

Testing and Certificates:

- NCHRP 350 accepted (FHWA Letters WZ-230, -231, -232)
- MUTCD – compliant



YTP Rigid Sign on
City Post GD
Glue Down Base
(R1-6)



SFP Rigid Sign on
"Banana" Base
(R1-6A)
(WZ #231)

Green Cross Post Options:

Pexco offers several alternatives to metal posts for improved safety and durability:

- 42 inch City Post FYG Safety Post – ultra-high impact post designed for the most demanding of installations, easily supports and rebounds the large Yield or Stop for Ped (R1-6 or R1-6A) signs
- 42 inch EFX FYG Safety Post – Super tough post designed to support larger signs and stand up to the most challenging installation, compatible with all FG 300 bases
- 42 inch X-Tube Upright – Lightweight square white reinforced plastic post for use with our Yeti base

Green Cross Sign Options:

- 12" x 36" Yield to Pedestrian or Stop for Pedestrian flexible sign can be placed at un-signalized school crossings. These portable signs meet the standards of the **2009 MUTCD for YTP (R1-6) or SFP (R1-6A)** signs



Yeti base
(WZ #232)



Fixed Base

Green Cross Base Options:

- FG 300 FYG Heavy Duty Base is for fixed installations where the post and base will remain on the road surface for an extended period of time
- FG 300 10# Round Portable Cookie Base for temporary installations where the base will be frequently moved from the road
- FG 300 35# Portable "Banana Base" is engineered to support the weight of larger crosswalk signs, yet transport is easy due to convenience of recessed handles
- "The Yeti" 40# Portable Base is heavy duty enough to stand up to high winds and support large crosswalk signs. The bases stack for simplified storage and molded handles make transport easy. The Yeti base is for use with the X-Tube upright only

Additional FG 300 base options shown on page 8

Parking Lot Signs / Sign Post Reflectors / Vertical Panels



Parking Lot Sign System

The Pexco sign post system allows for rapid installation of lightweight, durable plastic sign posts. Less expensive than steel, and far more visible, the system takes only minutes to install and will last for years. These posts bend when struck, return to vertical and won't damage vehicles like steel posts.

The white **X-Tube** Post is a 1.75" square post supported by two internal, corner-to-corner reinforcing cross beams. Made from UV-stabilized polymers, the posts offer superior impact resistance and withstand all weather conditions.

The **Parking Lot Base** is created from a high impact-resistant UV-stabilized resin, and is designed to conserve space and reduce trip hazards. It accepts both the X-Tubes and 1.75" square steel tube and locks securely in place with a simple bolt or quick-release pin. Available with optional 35# rubber "banana" base or square top cap.



X-Tube



Parking Lot Sign Base



Portable Rubber Base



Optional Top Cap



Day



Night



At RR Crossing

Sign Post Reflectors

Complex backgrounds in rural or urban settings make signs less noticeable. Pexco sign post reflectors are easy to install, and greatly increase visibility...day and night.

- Reflective stripes increase the visibility of regulatory and warning signs
- Fits on wood, U-channel and square steel sign posts
- Mounts to posts with hardware or VHB tape
- Available in two widths: 2 or 3-inches
- Available in two lengths: 60 or 72-inches
- Available in four colors: red, white, yellow and fluorescent yellow green



Opposing Traffic Lane Divider



Work Zone Vertical Panel on a Banana Base



FG 300 Type K Island Marker

Opposing Traffic Lane Divider (OTLD)

Fluorescent orange vertical panels used as a center lane divider to separate opposing vehicular traffic on a two-lane, two-way operation. 12" x 18" (36" overall height)

Self-Righting Vertical Panels

Pexco work zone vertical panels stand up to tremendous abuse. The posts rebound and panels re-orient after being struck to eliminate resetting and keep workers off the road.

Type K Markers/Island Markers

Pexco's FG 300 Type K / Island markers are the ideal way to mark and identify both raised and painted islands. They alert operators to raised locations during snow plow operations and help prevent damage to signs, light posts and vehicles.

Work Zone Pavement Markers



TRPM

TRPM - Flexible Chip Seal Markers

Simple to use “Stick and Stomp” TRPMs come with one or two clear plastic covers designed to protect the marker and reflective sheeting from asphalt spray or slurry products.

- Factory-applied butyl pad for reliable “Stick and Stomp” installation
- Standard colors are yellow and white
- Available with single or double covers and multiple staple configurations
- High heat TRPMs are available for hot-applied, rubberized asphalt chip seals



TOM

TOM - Temporary Overlay Markers

Primarily for short-term temporary lane line markings in asphalt paving projects and other construction work zones, these markers are placed after final rolling of the new asphalt. TOMs are engineered for easy application and removal to reduce the amount of time workers are in the roadway.

- Standard colors are yellow and white; additional colors by special order
- Factory-applied butyl pad keeps TOMs in place and are easily removed with a simple tug
- Available with bright and tough cube corner, micro-prismatic sheeting on one or both sides



One-Way Halftrack

Two-Way Halftrack

RPM

RPMs and Halftracks


Effective and convenient long-term temporary road markers are designed to be long lasting enough for use on both low volume roads and interstate highways to provide clear guidance to motorists both night and day. Simple to install and remove.

- Two standard colors – white and yellow
- Reflective tape can be applied on one or both sides
- Optional factory-applied high-tack butyl adhesive pad allows for a peel and stick application to the roadway




YouTube

Super TOMs / Rumble Strips / Baby Markers

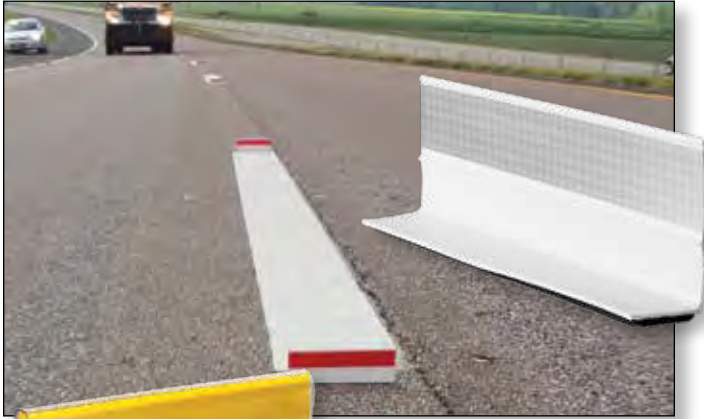

*Super TOM without cover
for asphalt paving*

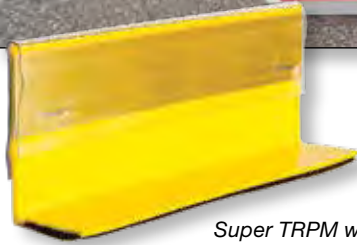

Super TRPM with cover for chip sealing

Super TOM and Super TRPM

An increasing number of states, including California, Illinois, Kansas and Michigan, have begun using 6-inch wide lines on their roadways. Why? Because 6-inch markings reduce the number of crashes overall, and most importantly reduce the number of fatal and severe crashes. Super TOMs not only match the move to wider lines, but also improve markings in construction and maintenance work zones, where greater visibility is most needed.



- 50% increase in daytime visibility
- 500% increase in nighttime reflectivity
- Improves performance of automated driving technologies
- Conforms to 6-inch markings used in 27 States
- Suitable for high ADT roadways
- Super TOM without covers for asphalt paving projects
- Super TRPM with covers for bituminous resurfacing projects



Raised Rumble Strip

Our Rumble Strip Model 3708 is ideal to delineate gores, bike and pedestrian lanes, and road shoulders to help prevent dangerous run-off-the-road accidents. The 3708 rumble strip is a solid uni-body marker which eliminates any hollow areas that can crack or crush when impacted by a vehicle.



- Install with hot melt bitumen or 2-part epoxy
- Available in standard white and yellow, or in custom red, blue and black
- Lengths: 8, 10 and 12 inches; 4, 5, 6 and 8 feet



Baby Road Markers

Self-adhesive 2" x 1.5" flexible raised pavement markers used on chip seal, slurry seals and fog seals where nighttime reflectivity is not required. The marker is placed on an existing line or utility location prior to the surface treatment for each relocation.

- Markers protrude up through the new surface, retaining the original location and eliminating the need to resurvey
- Two types of Baby Road Markers are available:
Type Y – amber body; Type W – white body

Adhesives and Anchors

Road Marker Epoxy



Our rapid-setting, 2-part grey road marker epoxy is the most reliable permanent adhesion product available. Typical applications include our new City Post, FG 300 posts, both curb systems and our rumble strips.

Spray Primer #80

Primer # 80 is an easy to use high-strength, contact spray adhesive for improving the adhesion of butyl to concrete and steel. Use this primer for preparing concrete barrier wall prior to installing Hi-Viz Flex Tabs, and installing temporary road markers on old asphalt and all concrete roadways.



Hand-held Epoxy Gun

FIRMmarker® is a clean, efficient, and easy to use adhesive system specifically formulated for channelizer posts, barrier and guardrail reflectors and permanent raised pavement markers.



The convenient packaging reduces prep time and waste.

DAPCO Adhesive 795A



A one-part, fast-cure adhesive for bonding concrete barrier markers, guardrail reflectors and other delineation products. 795A requires no mixing, is effective over a broad temperature range, has excellent weathering properties and offers "primerless" adhesion to concrete, asphalt and steel. 10oz. and 20oz. tubes available. Used with standard caulking gun.

Hi-Tack Butyl Adhesive - "Peel and Stick"



A butyl adhesive that offers quick, reliable adhesion for temporary installations of traffic control products. The butyl adhesive is available in 8" x 8" x 1/4" pads and 45 foot rolls and is suitable for bonding many of our channelizer and pavement marking products. The standard color is black; grey is available by special order.




SuperBundy® Adhesive "Heat 'N Stick"

SuperBundy® Adhesive is perfect for permanently adhering larger objects like channelizer posts or curb sections. SuperBundy Adhesive has resilient characteristics which enable it to remain flexible throughout its lifetime. Requires 2 pads per install.

FG 300 Anchor Bolts

Removable and reusable one-piece anchor bolts for FG 300 bases and curb sections have a finished hex head, an integral washer, dual-lead threads and a chamfered tip.



One-piece bolts eliminate the need to keep track of and assemble separate pieces of traditional molly bolts before installation.

Dual-lead threads prevent the bolts from spinning in the holes when tightened.




City Post SM Anchors

Removable and reusable one-piece anchor bolts for the City Post SM are reusable bolt-type expansion anchors. Install bolt-type anchors in holes drilled with carbide tipped drill bits; see installation instructions for details. (Note: FG 300 anchor bolts are not suitable for City Post SM installations.)



3" bolt for concrete



5" bolt for asphalt

Adhesive Application Chart

Product	Page #	Adhesive 795A 10 oz tube installs	Epoxy 1 quart each A plus B installs	Primer #80 10 oz spray can (for use with butyl) installs
Butterfly Reflectors	13-14	35 units	200 units	—
City Post Anchor Cup (2-inch)	5	—	8 units	—
City Post Anchor Cup (4-inch)	5	—	2 - 3 units	—
City Post GD Post	5	—	5 units	—
DP 200 Surface Mount Base	12	2 units	8 units	75 units
FG 300 Standard Base	8	2 units	8 units	75 units
FG 300 Interstate and Turnpike Grade Curbs	7	1.25 units	3 units	—
Halftrack	20	—	300 units	100 units
Hi-Viz Flex Tab	15	—	—	200 units
I-Flex	14	16 units	175 units	—
Invisi-base	6, 8	—	6 units	—
Island Alert (48")	13	—	—	60
Metro Base	8	2 units	8 units	—
Parking Lot Base	19	—	12 units	—
PCBM 12 and 912	15	16 units	175 units	250 units
RPM	20	—	75 units	50 units
Rumble Strips (12")	21	—	25 units	—
TRPM, TOM	20	—	—	200 units
Super TOMs/Super TRPMs	21	—	—	135 units

All units are estimated. Your results may vary.

Visit our website for downloadable:

- Product Information PDF files
- Options and Applications PDF files
- Installation Procedure PDF files
- The most up-to-date 2021 Electronic Product Catalog!

www.pexco.com/traffic



Click the CADdetails link on our website for up-to-date technical drawings and material specifications



Search "Pexco Traffic Safety Channel" on YouTube for our product videos and demonstrations or scan our QR codes



Where Ideas Take Shape.



Pexco LLC
Davidson Traffic Control Products
3110 70th Avenue East
Tacoma, WA 98424 USA
USA Toll-Free: 877-335-4638
International: 1-253-284-8000
Fax: 1-253-284-8080
Email: hwysales@pexco.com
www.pexco.com/traffic